

# COYOTE<sup>®</sup> FIBER OPTIC SOLUTIONS

Fiber Optic Closures | Pre-Terminated Cabinets  
NIDs | Passive Optical Components | Connectivity Solutions



## ABOUT PLP

PLP's line of COYOTE® fiber optic closures, cabinets, demarcation units, accessories and connectivity solutions trace their roots back to 1995 with the launch of the very first COYOTE Closure. Shortly thereafter, the product line expanded beyond the original closure to include smaller fiber count products, such as the COYOTE PUP and RUNT. Then, through additional field feedback, research, engineering, and development came a whole new breed of fiber optic closures – PLP's second generation of COYOTE products.

Just as the COYOTE Closure was groundbreaking technology in 1995, the patented segmented end plate and silicone grommet system of the second-generation COYOTE products made a similar industry-changing debut in 2004. Forever altering how fiber optic technicians and engineers approach installations when servicing or scaling a network, the new segmented end plate design provided independent access to each cable port without disrupting surrounding cables. The range-taking ability of the silicone grommet system, paired with the chemically bonded hard and soft polymer of the end plate cap, provides a secure seal around a wide variety of cable profiles, eliminating the need for scuffing, adhesives, sealing tapes, or cure times.

Another decade of innovation later, this technology now provides PLP with an array of outside plant closures for trunk, feeder, distribution, drop, and entrance applications which are compatible with loose tube, micro tube, tight-buffer, drop, buffered ribbon, uni-tube ribbon, ADSS, OPGW, and blown fiber optic cables.

All of PLP's outside plant closures are designed, engineered, and tested in accordance with the Telcordia® GR-771-CORE Generic Requirements for Fiber Splice Closures, providing the highest level of protection for your network. The COYOTE brand has become synonymous with quality, strength, and reliability, while also expanding to include dozens of new products and thousands of components - making it one of PLP's largest and most successful lines.

PLP serves all segments of the telecommunications industry including network operators, broadband service providers, enterprise networks, governmental agencies, educational institutions, and electric utilities deploying fiber optics.

Telcordia® is a registered trademark of Telcordia Technologies, Inc., now part of Ericsson.



## MANUFACTURING OPERATIONS

Headquartered in Cleveland, Ohio, PLP® delivers high-quality, dependable solutions and market-leading customer service through our two U.S. manufacturing plants, 24 global facilities, and a network of more than 3,000 team members.

Our 357,000 square foot Rogers, Arkansas manufacturing plant includes a state-of-the-art, 40,000 square foot injection molding facility with 13 presses allowing PLP to meet the increased demands of fiber optic closures for emerging technologies such as 5G, and our growing customer base.




## ROBOTIC MACHINERY ENHANCEMENTS

PLP continues to aggressively pursue world class lean manufacturing operations including the addition of robotic machinery to allow for more consistent applications as well as reducing repetitive motions for operators.



## QUALITY PRODUCTS, SHORTER LEAD TIMES

Most of the COYOTE® Fiber Optic closure and accessory line is manufactured at the Arkansas facility, allowing PLP to provide high quality products with shorter lead times, when compared to overseas manufacturers.

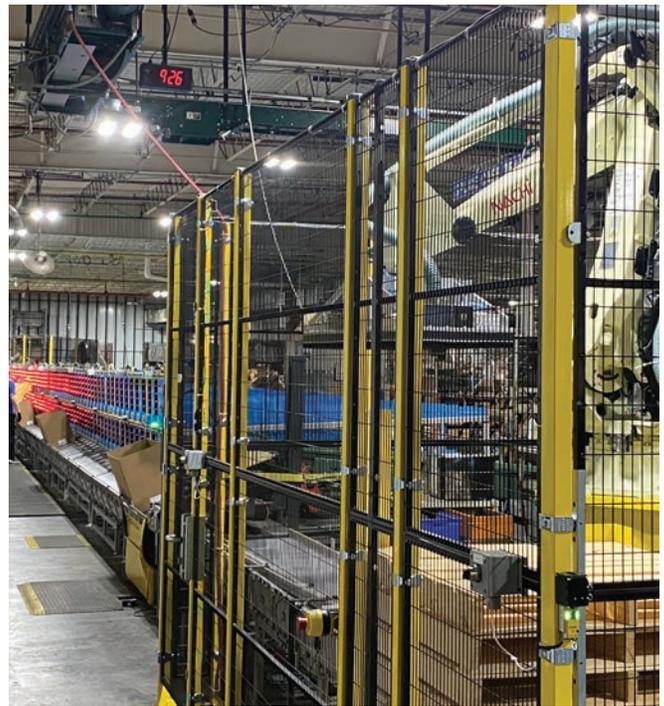

## CONTINUOUS IMPROVEMENT

When conducting business for fiber optic closures, small parts are a necessary means to complete the largest of splicing jobs. To ensure all small parts are packaged correctly in each fiber optic closure kit, PLP invested in a pick-to-light system. This system guides the packaging process by activating a light above each component required for the order. This process reduces the possibility of packaging errors and increases packing efficiency.



## TESTING & QUALITY CONTROL

Thomas Peterson, the founder of Preformed Line Products, believed in innovation and quality. That's why product testing has been an integral part of PLP since its beginning in 1947. In fact, not only do we test products during the development stage in our research laboratory at PLP's Global Headquarters, we also test products at all our manufacturing facilities to ensure our quality is never compromised.

Today, our state-of-the-art lab is one of the largest testing facilities of fiber connectivity devices for the communications industry as well as conductor and cable accessories for the power utility industry. While many competitors have reduced or eliminated their testing labs, we recently expanded ours by 50%, making it a 23,000 square foot facility.



## HIGH STANDARDS

Quality begins at the receipt of materials when an incoming inspection is performed. This step ensures that PLP products start with high-quality materials, supplied from certified, pre-approved vendors.



### TELCORDIA® COMPLIANT

*Quality control testing programs continue for fiber optic closures on a monthly, bi-monthly, and quarterly schedule ensuring that our products stay in line with Telcordia GR-771-CORE Generic Requirements for Fiber Splice Closures.*

## METICULOUS TESTING

During the development and production processes, we employ a variety of electrical, mechanical, chemical, functional, and environmental testing methods in accordance with Telcordia GR-771-CORE Generic Requirements for Fiber Splice Closures.



## SALES CONTACTS



**COMMUNICATIONS  
SALES**



**ELECTRIC UTILITY  
SALES**

## CUSTOMER SUPPORT

### U.S. SUPPORT

Tel: 440.461.5200

Fax: 440.442.8816


Email: [info@plp.com](mailto:info@plp.com)

### INTERNATIONAL SUPPORT

Tel: 440.473.9294

Fax: 440.461.2918


Email: [international@plp.com](mailto:international@plp.com)

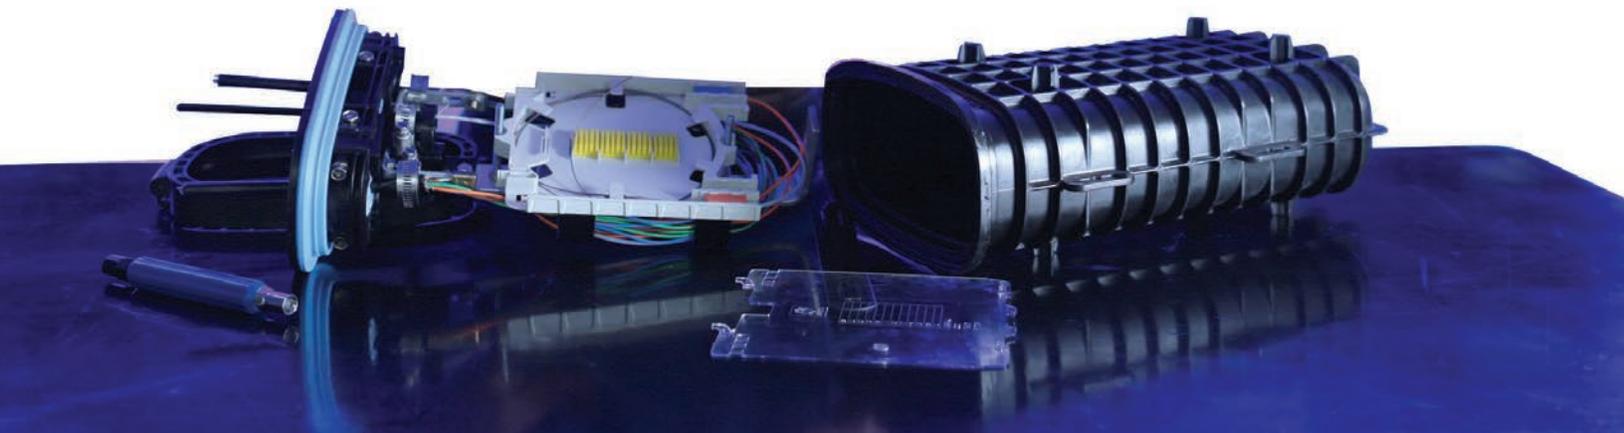

## CONTENTS

### COYOTE® FIBER OPTIC SOLUTIONS

|  |     |
|--|-----|
| COYOTE® STP (Service Termination Point).....         | 10  |
| COYOTE® DTC (Drop Termination Closure).....          | 12  |
| COYOTE® DTC4/6 (Drop Termination Closure).....       | 14  |
| COYOTE® DTC8 (Drop Termination Closure).....         | 16  |
| COYOTE® LCC (Low Count Closure).....                 | 18  |
| COYOTE® BGC (Bonding and Grounding Closure) .....    | 20  |
| COYOTE® ATC (Aerial Terminal Closure).....           | 22  |
| COYOTE® In-Line RUNT Closure .....                   | 24  |
| COYOTE® ONE Dome Closure .....                       | 28  |
| COYOTE® Dome Closure 6.5" x 17" and 6.5" x 22" ..... | 32  |
| COYOTE® Dome Closure 9.5" x 19" and 9.5" x 28" ..... | 36  |
| COYOTE® HD (High-Density) Dome Closure .....         | 40  |
| COYOTE® HD Stainless Steel Splice Case .....         | 46  |
| COYOTE® Terminal Closure .....                       | 50  |
| COYOTE® Terminal Dome Closure .....                  | 54  |
| COYOTE® Cross-Connect Closures .....                 | 60  |
| COYOTE® GLC (Ground Level Closure) .....             | 66  |
| COYOTE® MPC (Multi-Purpose Closure).....             | 76  |
| COYOTE® Access Solutions™ Cabinets.....              | 80  |
| COYOTE® Access Solutions Fiber Wall Plate .....      | 86  |
| COYOTE® ACE (Adaptable Connection Enclosure) .....   | 88  |
| COYOTE® Passive Optical Components.....              | 90  |
| COYOTE® PLC Splitters .....                          | 95  |
| COYOTE® Splice Trays .....                           | 96  |
| Sleeving and Tubing Kits for Cable Management.....   | 102 |
| COYOTE® Silicone Grommets .....                      | 104 |
| COYOTE® Mounting Brackets Reference Guide .....      | 106 |

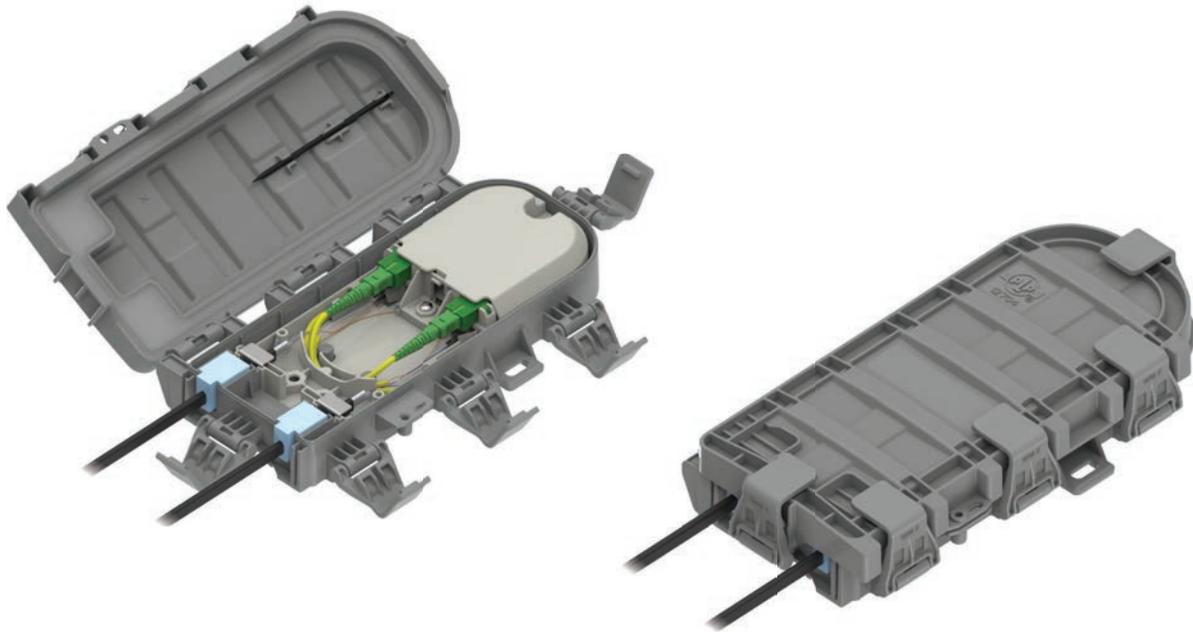

## COYOTE® STP

The **COYOTE STP (Service Termination Point)** is a small scale, cost effective closure which provides an alternative to traditional network interface devices, while offering much greater application flexibility. The robust latch system, paired with an integrated over-molded cover, allows for quick re-entry and creates a secure seal over a wide range of cable profiles. The COYOTE STP is ideal for use where the optical network terminal (ONT) is on the inside of a premises.

### FEATURES AND BENEFITS

- Dimensions: 10.1" x 5.0" x 1.9" (257 x 126 x 49 mm)
- Max Splice Capacity: 12 Single Fusion, 4 Mechanical
- Max Adapter Quantity: 2 Simplex SC or 2 Duplex LC
- Grommet Quantity: 2 (Multi-Hole Grommets Available)
- Grommet Cable Diameter Range: 0.100" – 0.425" (2.5 – 10.8 mm) and Flat Drop Cable
- Applications: Indoor/Outdoor Premises, Pedestal, Wall/Pole Network Interface Device (NID)
- Designed and tested in accordance to Telcordia® GR-771-CORE Above Grade, IP-67 Rated Requirements
- Constructed out of rugged UV-stabilized, flame-retardant material (UL94-5VA Rated)
- Robust latch system and intergrated over-molded cover creates a secure seal and provides quick re-entry into the closure
- Removable splice platform allows splicing and connections to be made outside of the closure

# ORDERING INFORMATION

## COYOTE STP Catalog Number

**STP- XX - X - X - X - X**  
 (Section 1) (Section 2) (Section 3) (Section 4) (Section 5)

Must be in  
alphabetical  
order

Catalog Number Example: STP-GG-3-1-2-2

### Section 1

| Grommet Selection (Select 2)  | Cable Diameter Range                            |
|---|---|
| A    | SOLID / PLUG                                    |
| B    | 0.100" - 0.154" (2.5 - 3.9 mm)<br>ROUND CABLES  |
| C    | 0.154" - 0.250" (3.9 - 6.4 mm)<br>ROUND CABLES  |
| D    | 0.250" - 0.350" (6.4 - 8.9 mm)<br>ROUND CABLES  |
| E   | 0.350" - 0.389" (8.9 - 9.9 mm)<br>ROUND CABLES  |
| F  | 0.389" - 0.425" (9.9 - 10.8 mm)<br>ROUND CABLES |
| G  | FOR FLAT DROP CABLES                            |
| H  | 0.100" - 0.123" (2.5 - 3.1 mm)<br>ROUND CABLES  |
| J  | 0.154" - 0.188" (3.9 - 4.8 mm)<br>ROUND CABLES  |

### Section 2

| Organizer Options (Select 1)   |
|--|
| 1 <br>Splice Only                              |
| 2 <br>Splice with Bonding & Grounding          |
| 3 <br>Cross-Connect                           |
| 4 <br>Cross-Connect with Bonding & Grounding |
| 5 <br>Direct Cross-Connect                   |

### Section 3

| Adapter Type (Select 1)   |
|---|
| N NONE  |
| 1 <br>SC/APC   |
| 2 <br>SC/UPC   |
| 3 <br>LC/APC |
| 4 <br>LC/UPC |

### Section 4

| Adapter Quantity |
|------------------|
| 0 to 2           |


### Section 5

| Pigtails Required (Select 1) (Matches adapter type and quantity)                                       |
|--|
| N NONE   |
| 1 <br>900 µm        |
| 2 <br>2 mm Jacketed |

### Accessories

| Catalog Number | Description   |
|----------------|---|
| 80061322       | COYOTE STP External Shroud Kit  |
| 80061323       | COYOTE STP Pedestal Mounting Bracket Kit for Charles Industries PEDLOCK® BD4 and BD5 Buried Cable Pedestals |

PEDLOCK® is a registered trademark of Charles Industries Ltd.

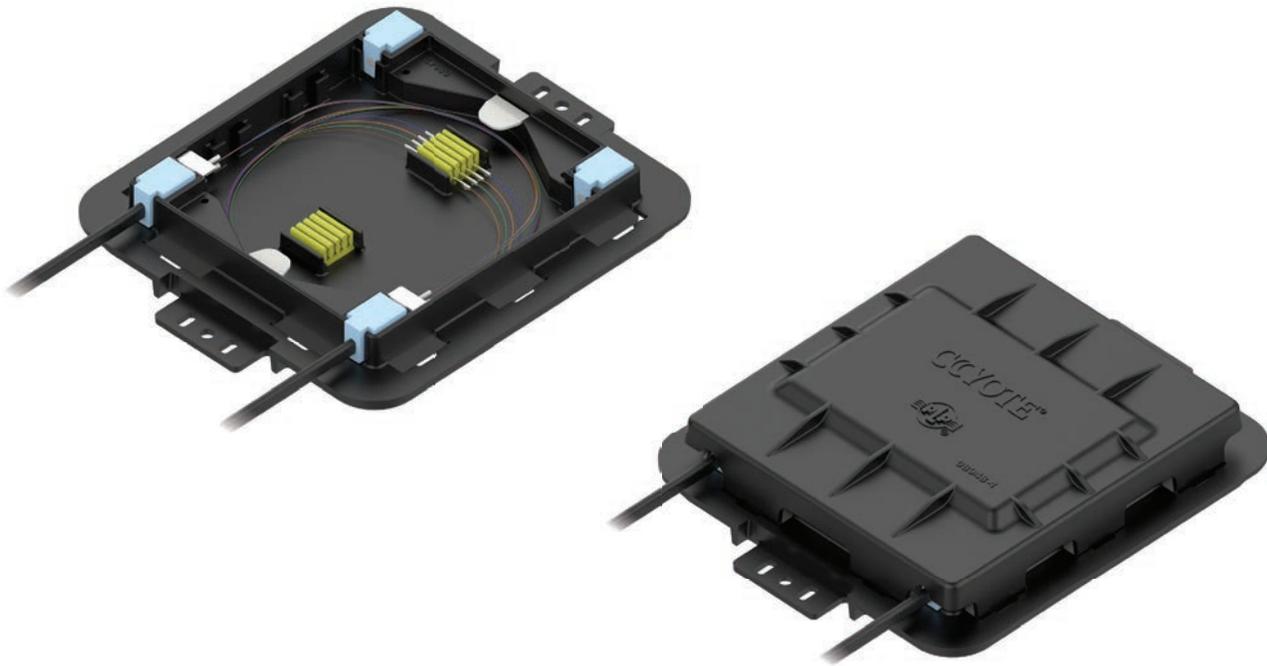

## COYOTE<sup>®</sup> DTC

The **COYOTE DTC (Drop Termination Closure)** offers a compact size and a rugged exterior that is designed to allow for installation in tight spaces without compromising functionality. Four corner ports provide flexibility during installation. The COYOTE DTC is ideal for quick restoration of damaged or cut fiber service drops or last mile FTTH applications.

### FEATURES AND BENEFITS

- Utilizes the LITE-GRIP<sup>®</sup> Splice Block System which permits single fusion, mass fusion, mechanical, PLC splitters, or a combination of all within one closure
- Factory-installed gasket allows re-entry and re-use
- Internal organizer manages buffer tube or ribbon cables
- Snap together design is quick to assemble, no special tools required
- Designed and tested in accordance to Telcordia<sup>®</sup> GR-771-CORE Buried, Underground, IP-68 Rated Requirements

## Specifications


|  |   |
|--|---|
| Catalog Number   | COYDTC-001, COYDTC-002, COYDTC-003, COYDTC-004                      |
| Splice Capacity (Maximum) - Single Fusion, Mass Fusion | 24, 36  |
| Cable Ports  | 4   |
| Cable Diameters  | 0.17" – 0.37" (4.3 – 9.4 mm) and Flat Drop                          |
| Configuration  | In-Line or Butt   |
| Application  | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection                                     | In accordance to Telcordia® GR-771-CORE, Buried, Underground, IP-68 |
| Size   | 9.1" L x 7.6" W x 1.7" D (231 x 193 x 43 mm)                        |

## COYOTE DTC Kit Contents

| Catalog Number | Description  |
|----------------|--|
| COYDTC-001     | COYOTE DTC for Flat and Small Drop Cables – Includes (4) 1-Hole Grommets 0.17" – 0.25" (4.3 – 6.4 mm) and Flat Drop Cable, (2) LITE-GRIP® Single Fusion Splice Blocks, (1) LITE-GRIP Mass Fusion Splice Block and Cable Restraint Hardware   |
| COYDTC-002     | COYOTE DTC for Larger Round Cables – Includes (4) 1-Hole Grommets 0.25" – 0.37" (6.4 – 9.4 mm), (2) LITE-GRIP Single Fusion Splice Blocks, (1) LITE-GRIP Mass Fusion Splice Block and Cable Restraint Hardware   |
| COYDTC-003     | COYOTE DTC for Larger Round Shielded Drop Cables – Includes (4) 1-Hole Grommets 0.25" – 0.37" (6.4 – 9.4 mm), (4) Small Hose Clamps, (4) Cable Retention Clips, (2) LITE-GRIP Single Fusion Splice Blocks, (1) LITE-GRIP Mass Fusion Splice Block, Cable Restraint Hardware, (4) Shield Continuity Clips and (2) Shield Continuity Wire Assemblies |
| COYDTC-004     | COYOTE DTC for Sumitomo PureFit™ FTTX 36 Fiber Flat Drop Cable – Includes (2) 1-Hole Grommets for Sumitomo PureFit Cable, (2) 1-Hole Grommets 0.17" – 0.25" (4.3 – 6.4 mm) and Flat Drop Cable, (1) Splice Tray with (4) LITE-GRIP Low Profile Single Fusion Splice Blocks, (1) Buffer Tube Storage Ring and Cable Restraint Hardware              |

## COYOTE DTC Accessories

| Catalog Number | Description  |
|----------------|--|
| 80809960       | Hose Clamp Clip Kit – Includes (4) Small Hose Clamps and (4) Cable Retention Clips   |
| 80811033       | Grommet Kit – Includes (4) 0.17" – 0.25" (4.3 – 6.4 mm) Grommets   |
| 80811034       | Grommet Kit – Includes (4) 0.25" – 0.37" (6.4 – 9.4 mm) Grommets   |
| 80811237       | Splice Tray Kit – Includes (1) Splice Tray, (4) LITE-GRIP Low Profile Single Fusion Splice Blocks and (1) Buffer Tube Storage Ring |
| 80812533       | Cover Opening Tool   |
| 80808187       | Heat Shrink Splice Protector Kit – Includes (12) 40 mm Single Fusion   |
| 8003509        | Heat Shrink Splice Protector Kit – Includes (12) 60 mm Single Fusion   |
| 8003993        | Heat Shrink Splice Protector Kit – Includes (12) 40 mm Mass Fusion   |
| 80813362       | Splice Block Kit – Includes (6) Plastic 12 CT. Single Fusion Splice Blocks, Orange   |
| LGSBS8-5       | Splice Block Kit – Includes (5) LITE-GRIP 8 CT. Single Fusion Splice Blocks, Yellow  |
| LGSBR3-5       | Splice Block Kit – Includes (5) LITE-GRIP 36 CT. Mass Fusion Splice Blocks, Purple   |

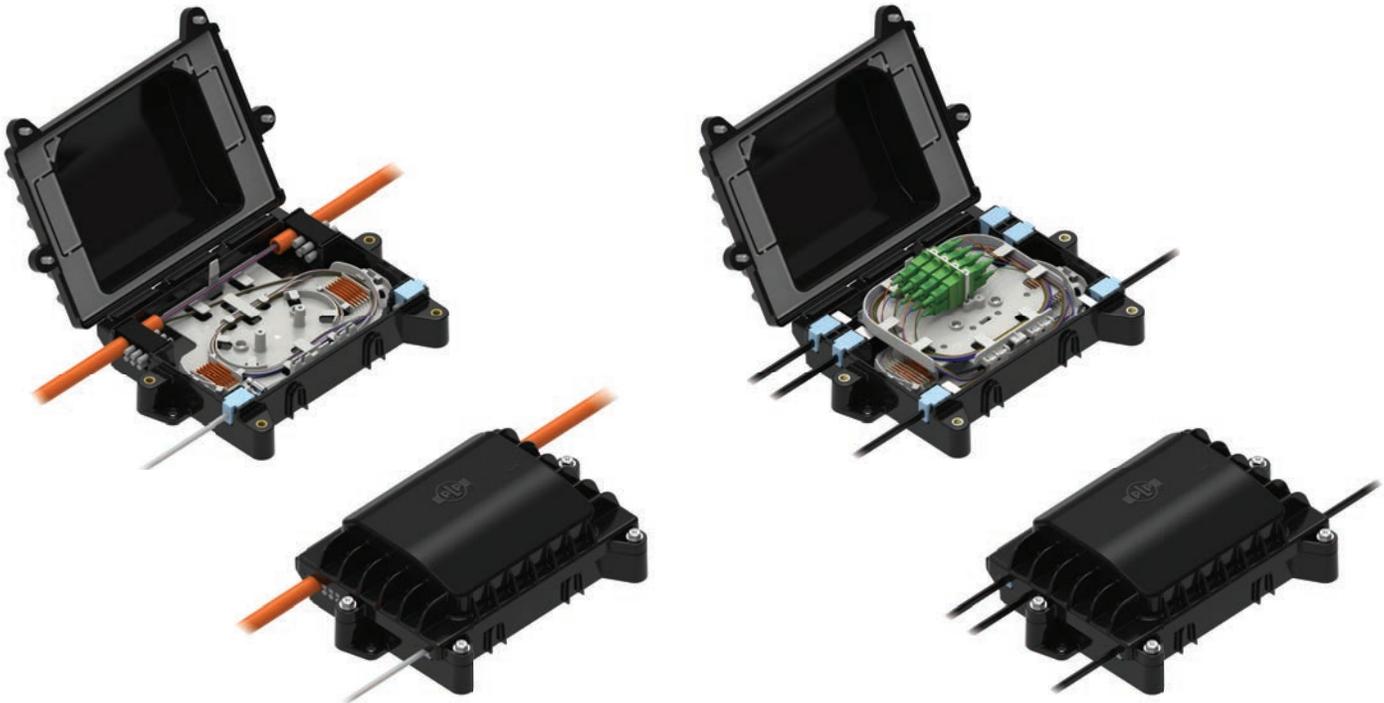

## COYOTE® DTC4 AND DTC6

The **COYOTE DTC4 and DTC6 (Drop Termination Closure)** offer a durable, compact solution with multiple internal fiber organizers to support your current and future needs. Network evolution is unpredictable so why not choose a closure system developed to adapt. The DTC4 can be used as a transition unit for interior duct applications. Both the COYOTE DTC4 and DTC6 can equip an adapter bulkhead tray that hinges to allow access to the underlying fiber slack storage area.

### FEATURES AND BENEFITS

- Dimensions: 10.8" x 7.8" x 3.2" (274 x 198 x 82 mm)
- Max Splice Capacity: 24 Single Fusion
- Max Adapter Quantity: 4 Dual SC or 4 Quad LC
- Grommet Quantity: 4 or 6 (Multi-Hole Grommets Available)
- Grommet Cable Diameter Range: Large Grommets = 0.118" – 0.60" (3 – 15 mm)  
Small Grommets = 0.093" – 0.420" (2.4 – 10.7 mm) and Flat Drop
- Applications: Direct Bury, Below Grade, Pole/Wall Mount, Pedestal, Aerial, or Interior Applications
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirements
- Constructed out of rugged UV-stabilized, flame-retardant material (UL94-5VA Rated)
- Hinged cover with integrated over-mold creates a secure seal and provides quick re-entry and re-use

## ORDERING INFORMATION

### COYOTE® DTC4 Catalog Number

**DTC4-** XX - XX - X - X - X - X  
 (Section 1) (Section 2) (Section 3) (Section 4) (Section 5) (Section 6)  
 Must be in alphabetical order      Must be in alphabetical order

Catalog Number Example: DTC4-AA-DD-2-1-2-N

### COYOTE® DTC6 Catalog Number

**DTC6-** XXXXXX - X - X - X - X  
 (Section 2) (Section 3) (Section 4) (Section 5) (Section 6)  
 Must be in alphabetical order

Catalog Number Example: DTC6-AABBDD-2-2-2-Y

#### Section 1

| DTC4 Large Grommet Selection (Select 2) | Cable Diameter Range  |
|---|---|
| A                                       | 5-Hole Design<br>1 Hole: 0.55" – 0.60" (14 - 15 mm)<br>4 Holes: 0.275" (7 mm) |
| B                                       | 7-Hole Design<br>1 Hole: 0.55" – 0.60" (14 - 15 mm)<br>6 Holes: 0.197" (5 mm) |
| C                                       | 7-Hole Design<br>1 Hole: 0.335" (8.5 mm)<br>6 Holes: 0.197" (5 mm)            |
| D                                       | 8-Hole Design<br>8 Holes: 0.197" (5 mm)                                       |
| E                                       | 8-Hole Design<br>8 Holes: 0.118" (3 mm)                                       |

#### Section 2

| DTC4 Small Grommet Selection (Select 2)        | Cable Diameter Range                               |
|--|--|
| <b>DTC6 Small Grommet Selection (Select 6)</b> |  |
| A  | SOLID / PLUG                                       |
| B  | 0.170" – 0.250"<br>(4.3 - 6.4 mm)<br>ROUND CABLES  |
| C  | 0.250" – 0.350"<br>(6.4 - 8.9 mm)<br>ROUND CABLES  |
| D  | 0.156" – 0.170"<br>(4.0 - 4.3 mm)<br>ROUND CABLES  |
| E  | 0.093" – 0.125"<br>(2.4 - 3.2 mm)<br>ROUND CABLES  |
| F  | FOR FLAT DROP CABLES                               |
| G  | 0.350" – 0.420"<br>(8.9 - 10.7 mm)<br>ROUND CABLES |

#### Section 3

| Organizer Options (Select 1) |
|------------------------------|
| 1                            |
| 2                            |

#### Section 4

| Adapter Type (Select 1) |                   |
|-------------------------|-------------------|
| N                       | NONE              |
| 1                       | <br>Duplex SC/APC |
| 2                       | <br>Duplex SC/UPC |
| 3                       | <br>Quad LC/APC   |
| 4                       | <br>Quad LC/UPC   |

#### Section 5

| Adapter Quantity |
|------------------|
| 0 to 4           |

#### Section 6

| Pigtails Required (Select 1) (Matches adapter type and quantity) |            |
|--|------------|
| N  | NONE       |
| Y  | <br>900 µm |

#### Accessories

| Catalog Number | Description   |
|----------------|---|
| 8004109        | COYOTE DTC4/6 Pole/Wall Mounting Bracket  |
| 8004110        | COYOTE DTC4/6 Cable Storage Bracket   |
| 8004111        | COYOTE DTC4/6 Aerial Mounting Bracket – Strand Applications                         |
| 8004112        | COYOTE DTC4/6 Aerial Mounting Bracket – ADSS Applications                           |
| 8004172        | COYOTE DTC4/6 Mounting Bracket – For use with FIBERLIGN® ADSS Cable Storage Bracket |



## COYOTE® DTC8

The **COYOTE DTC8 (Drop Termination Closure)** is the largest member of the DTC family. The DTC8 provides the ultimate level of application flexibility for fiber drop distribution applications. The closure can be configured with a range of fiber organizer systems to support splice, distributed splitter and drop applications using traditional cable, blown fiber cable, pushable drop cable technology or micro tube cable. Organizers to support pre-connected drop applications as an alternative to more costly proprietary hardened drop cable systems are also available.

### FEATURES AND BENEFITS

- Dimensions: 12" x 8.8" x 3.5" (305 x 224 x 89 mm)
- Max Splice Capacity: 48 Single Fusion
- Max Adapter Quantity: 4 Duplex SC or 4 Quad LC
- Grommet Quantity: 8 (Multi-Hole Grommets Available)
- Grommet Cable Diameter Range: Large Grommets = 0.093" – 0.550" (2.4 - 14.0 mm) and Flat Drop Cable  
Small Grommets = 0.093" – 0.420" (2.4 - 10.7 mm) and Flat Drop Cable
- Applications: Direct Bury, Below Grade, Pole/Wall Mount, Aerial, or Pedestal
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirements
- Constructed out of rugged UV-stabilized, flame retardant material (UL94-5VA Rated)
- Hinged collar system and intergrated over-molded cover provides quick re-entry and re-use, no special tools required

# ORDERING INFORMATION

## COYOTE® DTC8 Catalog Number

**DTC8-** XXXX - XXXX - X - X - X - X - X  
 (Section 1) (Section 2) (Section 3) (Section 4) (Section 5) (Section 6) (Section 7)  
 Must be in alphabetical order      Must be in alphabetical order

Catalog Number Example: DTC8-BBDD-CCCC-2-2-1-2-Y

### Section 1

| Grommet Selection (Select 4) | Cable Diameter Range                             |
|------------------------------|--|
| A                            | SOLID / PLUG                                     |
| B                            | 0.170" – 0.220" (4.3 – 5.6 mm)<br>ROUND CABLES   |
| C                            | 0.220" – 0.270" (5.6 – 6.9 mm)<br>ROUND CABLES   |
| D                            | 0.270" – 0.320" (6.9 – 8.1 mm)<br>ROUND CABLES   |
| E                            | 0.320" – 0.370" (8.1 – 9.4 mm)<br>ROUND CABLES   |
| F                            | 0.370" – 0.420" (9.4 – 10.7 mm)<br>ROUND CABLES  |
| G                            | 0.420" – 0.470" (10.7 – 11.9 mm)<br>ROUND CABLES |
| H                            | 0.470" – 0.550" (11.9 – 14.0 mm)<br>ROUND CABLES |
| J                            | 0.156" – 0.170" (4.0 – 4.3 mm)<br>ROUND CABLES   |
| K                            | 0.093" – 0.125" (2.4 – 3.2 mm)<br>ROUND CABLES   |
| L                            | FOR FLAT DROP CABLES                             |

### Section 2

| Grommet Selection (Select 4) | Cable Diameter Range                            |
|------------------------------|---|
| A                            | SOLID / PLUG                                    |
| B                            | 0.170" – 0.250" (4.3 – 6.4 mm)<br>ROUND CABLES  |
| C                            | 0.250" – 0.350" (6.4 – 8.9 mm)<br>ROUND CABLES  |
| D                            | 0.156" – 0.170" (4.0 – 4.3 mm)<br>ROUND CABLES  |
| E                            | 0.093" – 0.125" (2.4 – 3.2 mm)<br>ROUND CABLES  |
| F                            | FOR FLAT DROP CABLES                            |
| G                            | 0.350" – 0.420" (8.9 – 10.7 mm)<br>ROUND CABLES |

### Section 3

| Organizer Options (Select 1) |                                  |
|------------------------------|----------------------------------|
| 1                            | Splice Only - Protected Storage  |
| 2                            | Splice & Adapters                |
| 3                            | Splice Only - Open Storage       |
| 4                            | Adapters Only                    |
| 5                            | Splice & Adapters - Open Storage |

### Section 4

| Splice Tray Selection Selection/Quantity |                        |
|--|------------------------|
| N  | NONE (Organizer 4 & 5) |
| 1 to 4                                   | 12 Count Tray          |

### Section 5

| Adapter Type (Select 1) |               |
|-------------------------|---------------|
| N                       | NONE          |
| 1                       | Duplex SC/APC |
| 2                       | Duplex SC/UPC |
| 3                       | Quad LC/APC   |
| 4                       | Quad LC/UPC   |

### Section 6


| Adapter Quantity                                  |
|---|
| 0 to 4 (Organizer 2 or 5)<br>0 to 8 (Organizer 4) |

### Section 7

| Pigtails Required (Select 1) (Matches adapter type and quantity) |             |
|--|-------------|
| N  | NONE        |
| Y  | 900 µm      |
| Optional   |             |
| G  | Ground Stud |

### Accessories

| Catalog Number | Description  |
|----------------|--|
| 80812456       | Splice Tray, 12 CT., Single Fusion   |
| 80812916       | Splitter Tray for 1x2, 1x4, 1x8 Bare Fiber Splitters or 1x2, 1x4 Pre-Connectorized Splitters       |
| 8004104        | COYOTE DTC8 Pole/Wall Mounting Bracket   |
| 8004105        | COYOTE DTC8 Cable Storage Bracket  |
| 8004111        | COYOTE DTC8 Aerial Mounting Bracket – Strand Applications  |
| 8004112        | COYOTE DTC8 Aerial Mounting Bracket – ADSS Applications  |
| 8004108        | COYOTE DTC8 Pedestal Bracket Kit – For use with Channell Commercial Corp. 10" x 22" Round Pedestal |
| 8004172        | COYOTE DTC8 Mounting Bracket – For use with FIBERLIGN® ADSS Cable Storage Bracket                  |

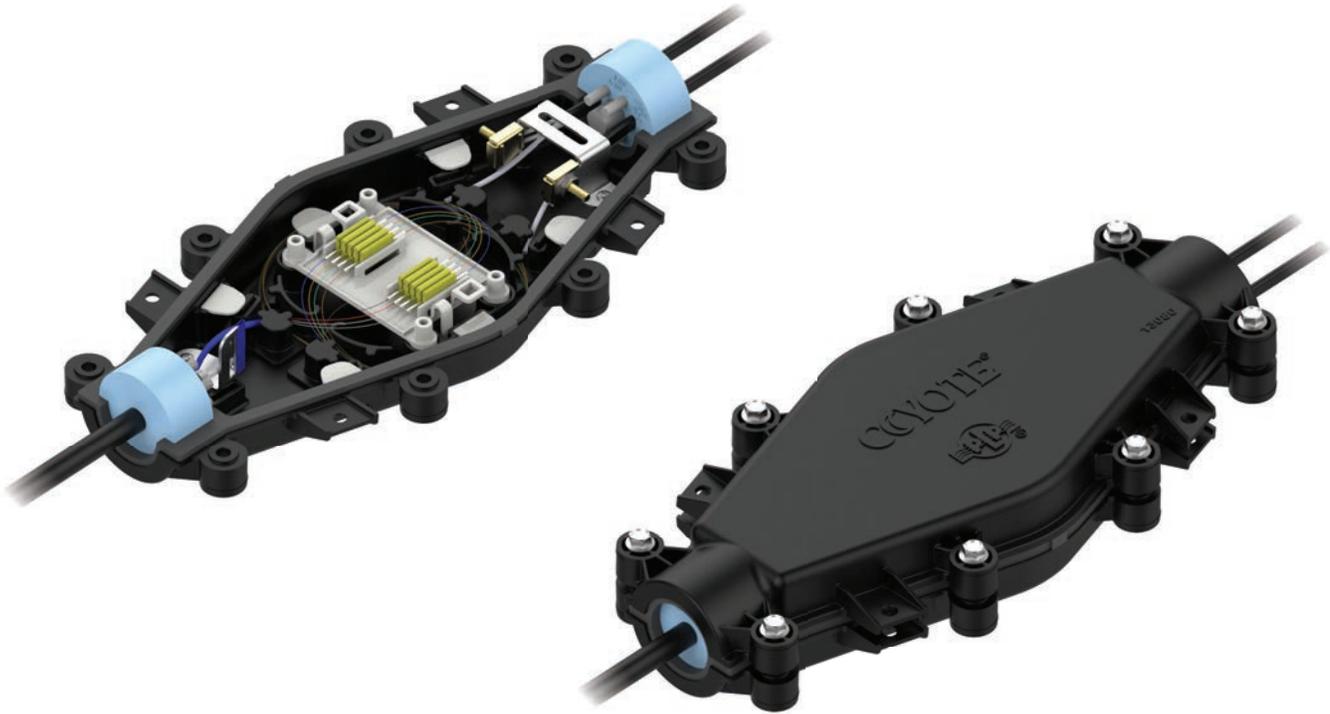

## COYOTE® LCC

The **COYOTE LCC (Low Count Closure)** is a compact closure that utilizes the COYOTE silicone grommet system and LITE-GRIP® splice platform, is designed making this rugged closure the ideal economical solution for new drop cable installations and critical repair situations.

### FEATURES AND BENEFITS

- Offers a cost-effective solution for quick restoration of damaged or cut fiber service drops
- Utilizes the LITE-GRIP splice block system which permits single fusion, mass fusion, mechanical, PLC splitters, or a combination of all within one closure
- Factory installed gasket allows for re-entry and re-use
- LCC halves are constructed of a UV-stabilized material
- Flexible grommet sealing technology supports a wide range of flat and round cable profiles
- Flat shape allows for mounting in small areas
- Flame-retardant and ribbon kits available
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirements

## Specifications

|  |   |
|--|---|
| <b>Catalog Number</b>                                  | COYLCC-F001 through COYLCC-F015                                     |
| Splice Capacity (Maximum) – Single Fusion, Mass Fusion | 24, 72  |
| Cable Ports <sup>1</sup>                               | 2   |
| Cable Diameters  | 0.093" – 1.00" (2.4 – 25.4 mm) and Flat Drop                        |
| Configuration  | In-Line or Butt   |
| Application  | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection                                     | In accordance to Telcordia® GR-771-CORE, Buried, Underground, IP-68 |
| Size   | 14.0" L x 6.5" W x 2.5" D (356 x 165 x 64 mm)                       |

<sup>1</sup>Multi-hole grommets allow for more than one cable to enter each cable port.

## COYOTE LCC for Fiber Kit Contents


| Catalog Number | Description   |
|----------------|---|
| COYLCC-F001    | COYOTE LCC Closure for Single Fusion – Includes (1) 7-Hole Grommet [1 Hole: 0.42" – 0.60" (10.7 – 15.2 mm) and 6 Holes: 0.125" – 0.250" (3.2 – 6.4 mm) and Flat Drop Cable] and (1) 12-Hole Grommet Flat Drop Cable                   |
| COYLCC-F002    | COYOTE LCC Closure for Single Fusion – Includes: (1) 7-Hole Grommet [1 Hole: 0.42" – 0.60" (10.7 – 15.2 mm) and 6 Holes: 0.125" – 0.250" (3.2 – 6.4 mm) and Flat Drop Cable], (1) 12-Hole Grommet Flat Drop Cable, and (1) Bobbin Kit |
| COYLCC-F004    | COYOTE LCC Closure for Single Fusion – Includes (2) 7-Hole Grommets [1 Hole: 0.42" – 0.60" (10.7 – 15.2 mm) and 6 Holes: 0.125" – 0.250" (3.2 – 6.4 mm) and Flat Drop Cable]  |
| COYLCC-F005    | COYOTE LCC Closure for Single Fusion – Includes (2) 2-Hole Grommets 0.42" – 0.60" (10.7 – 15.2 mm)  |
| COYLCC-F006    | COYOTE LCC Closure for Single Fusion – Includes (2) 4-Hole Grommets 0.30" – 0.43" (7.6 – 10.9 mm)   |
| COYLCC-F008    | COYOTE LCC Closure for Single Fusion – Includes (1) 1-Hole Grommet 0.40" – 0.60" (10.2 – 15.2 mm) and (1) 8-Hole Grommet 0.125" – 0.250" (3.2 – 6.4 mm) and Flat Drop Cable   |
| COYLCC-F012    | COYOTE LCC Closure for Single Fusion – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm)  |
| COYLCC-F014    | COYOTE LCC Closure for Single Fusion – Includes (2) 2-Hole Grommets 0.42" – 0.60" (10.7 – 15.2 mm) and (2) Dual Strength Member Brackets  |
| COYLCC-F015    | COYOTE LCC Closure for Single Fusion – Includes (2) 7-Hole Grommets [1 Hole: 0.42" – 0.60" (10.7 – 15.2 mm) and 6 Holes: 0.125" – 0.250" (3.2 – 6.4 mm) and Flat Drop Cable] and (2) Dual Strength Member Brackets                    |

- For the COYOTE LCC Flame Retardant catalog numbers, insert "FR" into the catalog number code. Ex.: COYLCCFR-F001

- All kits include (1) LCC Closure, (2) Grommets, (3) LITE-GRIP® 8 CT. Single Fusion Splice Blocks, (1) Splice Platform, (1) Dual Strength Member Bracket, (1) L-Strength Member Bracket, (4) Fiber Management Clips

## COYOTE LCC Accessories

| Catalog Number | Description  |
|----------------|--|
| 80808633       | Flat Drop Cable Retention Bobbin Kit   |
| 80811037       | 4-Port Cable Retention Bobbin Kit  |
| 80811036       | 6-Port Drop Cable Retention Bobbin Kit   |
| 80809851       | Dual Strength Member Bracket Kit – Includes (1) Dual Strength Member Bracket and (2) Cap/Stud Assemblies |
| 8003843        | L-Strength Member Bracket Kit – Includes (2) L-Strength Member Brackets                                  |
| 8003832        | Aerial Mounting Bracket - Strand Applications  |
| 8003852        | Aerial Mounting Bracket - ADSS Applications  |
| 8003830        | Pole/Wall Mounting Bracket   |
| 8003835        | Handhole Mounting Bracket  |

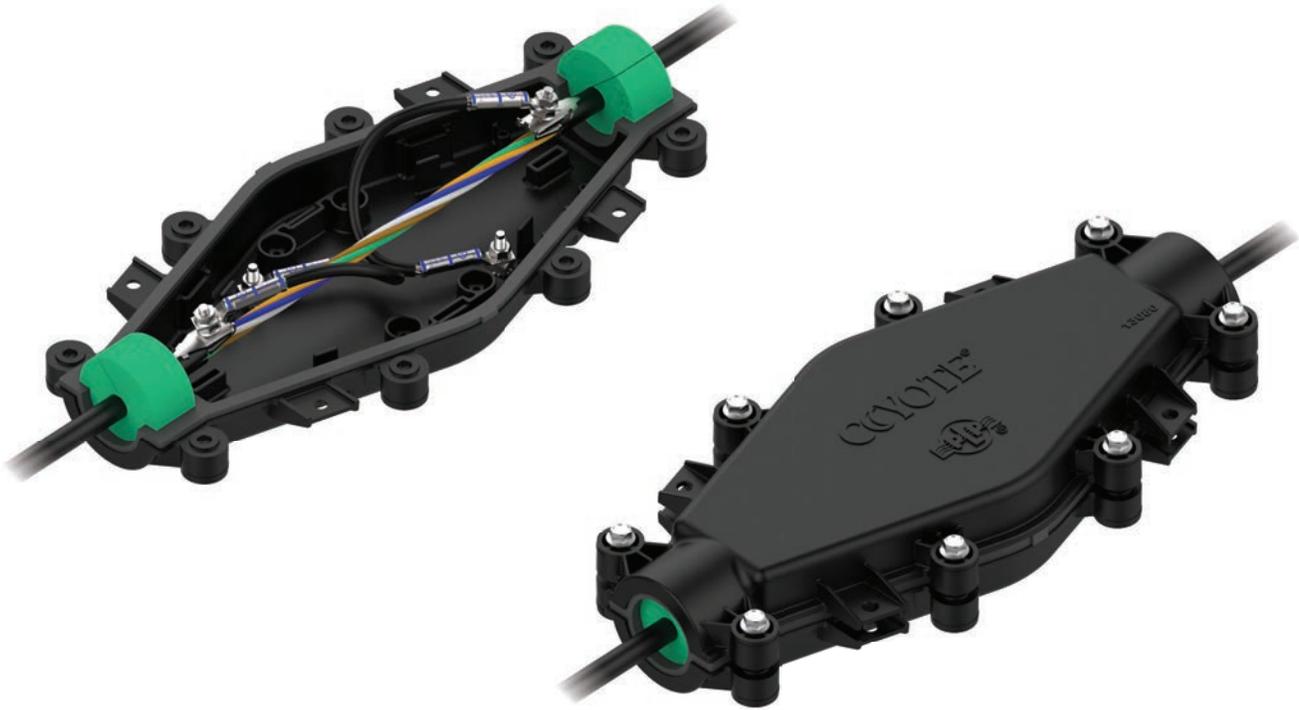

## COYOTE® BGC

The **COYOTE BGC (Bonding and Grounding Closure)** is a compact closure that utilizes the COYOTE silicone grommet system and integrated grounding studs, make this rugged closure the ideal economical solution for bonding and grounding needs.

### FEATURES AND BENEFITS

- Offers a cost-effective solution for bonding and grounding applications
- Two ground stud design provides the ability to trouble shoot without entering closure assembly
- Internal bonding leads with double crimped compression lugs designed to ensure a reliable bonding connection
- Factory installed gasket allows for re-entry and re-use
- BGC halves are constructed out of a rugged UV-stabilized material
- Flame-retardant kits available
- Factory slit, craft-friendly grommet system reduces assembly time
- Flat shape allows for mounting in small areas
- Captive hardware ensures quick, easy assembly, no special tools required
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirements

## Specifications

|                    |   |
|--------------------|---|
| Catalog Number     | COYBGC-001, COYBGC-002, COYBGC-003                                  |
| Cable Ports        | 2   |
| Cable Diameters    | 0.40" – 0.96" (10.1 – 24.4 mm)                                      |
| Ground Studs       | 2   |
| Configuration      | In-Line   |
| Application        | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection | In accordance to Telcordia® GR-771-CORE, Buried, Underground, IP-68 |
| Size               | 14.0" L x 6.5" W x 2.5" D (356 x 165 x 64 mm)                       |

## COYOTE BGC Kit Contents for OSP Applications

| Catalog Number | Description  |
|----------------|--|
| COYBGC-001     | COYOTE BGC Closure for Shielded Cable Diameters 0.40" – 0.60" (10.1 – 15.2 mm) |
| COYBGC-002     | COYOTE BGC Closure for Shielded Cable Diameters 0.60" – 0.85" (15.2 – 21.6 mm) |
| COYBGC-003     | COYOTE BGC Closure for Shielded Cable Diameters 0.85" – 0.96" (21.6 – 24.4 mm) |

## COYOTE BGC Kit Contents for Vault Applications (Flame Retardant)

| Catalog Number | Description  |
|----------------|--|
| COYBGCFR-001   | COYOTE BGC Closure for Shielded Cable Diameters 0.40" – 0.60" (10.1 – 15.2 mm) |
| COYBGCFR-002   | COYOTE BGC Closure for Shielded Cable Diameters 0.60" – 0.85" (15.2 – 21.6 mm) |
| COYBGCFR-003   | COYOTE BGC Closure for Shielded Cable Diameters 0.85" – 0.96" (21.6 – 24.4 mm) |

All kits include (1) BGC Closure, (2) 1-Hole Grommets, and (2) Bond Connectors

## COYOTE BGC Accessories

| Catalog Number | Description                                   |
|----------------|---|
| 8003832        | Aerial Mounting Bracket - Strand Applications |
| 8003835        | Pole/Wall Mounting Bracket                    |
| 8003830        | Handhole Mounting Bracket                     |



## COYOTE® ATC

The **COYOTE ATC (Aerial Terminal Closure)** is an aerial closure system designed to support the drop distribution network without the need for specialized drop cable assemblies. The closure features a unique dual chamber design with independent access to the splice/slack storage chamber and to the drop connection chamber. The cover latch system expedites access for drop installation and the fasteners secure the splice chamber cover to restrict access after initial installation. Inside the closure is a large slack storage area and splice tray system which supports single fusion, mass fusion, mechanical splice protectors, or splitter technology.

### FEATURES AND BENEFITS

- Dimensions: 17" x 10" x 4" (432 x 254 x 102 mm)
- Max Splice Capacity: 48 Single Fusion
- Max Adapter Quantity: 16 Simplex SC or 16 Duplex LC
- Grommet Quantity: 4 Splice Chamber and 8 Drop Chamber (Multi-Hole Grommets Available)
- Grommet Cable Diameter Range: Splice Chamber Grommets = 0.156" - 0.55" (4 - 14 mm)  
Drop Chamber Grommets = 0.093" - 0.22" (2.4 - 5.6 mm) and Flat Drop
- Applications: Aerial
- Designed and tested in accordance to Telcordia® GR-771-CORE Above Grade, IP-55 Rated Requirements
- Constructed out of rugged UV-stabilized, flame retardant material (UL94-5VA Rated)
- Dual cover design allows independent access to each closure chamber

# ORDERING INFORMATION

## COYOTE® ATC Catalog Number

**ATC- XXXX - X - X - X - X - X**  
 (Section 1) (Section 2) (Section 3) (Section 4) (Section 5) (Section 6)  
 Must be in alphabetical order

Catalog Number Example: ATC-AADD-9-N-1-3-8

### Section 1

| Splice Chamber Grommet Selection (Select 4) | Cable Diameter Range                             |
|---|--|
| A   | SOLID / PLUG                                     |
| B   | 0.200" – 0.250" (5.0 – 6.4 mm)<br>ROUND CABLES   |
| C   | 0.250" – 0.300" (6.4 – 7.6 mm)<br>ROUND CABLES   |
| D   | 0.300" – 0.350" (7.6 – 8.9 mm)<br>ROUND CABLES   |
| E   | 0.350" – 0.400" (8.9 – 10.2 mm)<br>ROUND CABLES  |
| F   | 0.400" – 0.450" (10.2 – 11.4 mm)<br>ROUND CABLES |
| G   | 0.450" – 0.500" (11.4 – 12.7 mm)<br>ROUND CABLES |
| H   | 0.500" – 0.550" (12.7 – 14.0 mm)<br>ROUND CABLES |
| J   | 0.156" – 0.187" (4.0 – 4.7 mm)<br>ROUND CABLES   |

### Section 2

| Splice Chamber Splitter Type (Select 1) |               |
|---|---------------|
| N                                       | NONE          |
| Bare Fiber PLC Splitters                |               |
| 1                                       | 1x4           |
| 2                                       | 1x8           |
| 3                                       | 1x16          |
| Pre-Connectorized PLC Splitters         |               |
| 4                                       | 1x4 - SC/APC  |
| 5                                       | 1x4 - LC/APC  |
| 6                                       | 1x4 - SC/UPC  |
| 7                                       | 1x4 - LC/UPC  |
| 8                                       | 1x8 - SC/APC  |
| 9                                       | 1x8 - LC/APC  |
| 10                                      | 1x8 - SC/UPC  |
| 11                                      | 1x8 - LC/UPC  |
| 12                                      | 1x16 - SC/APC |
| 13                                      | 1x16 - LC/APC |
| 14                                      | 1x16 - SC/UPC |
| 15                                      | 1x16 - LC/UPC |

### Section 3

| Splice Chamber Pigtails (Select 1)<br>(Matches adapter type and quantity) |            |
|---|------------|
| N   | NONE       |
| Y   | <br>900 µm |

### Section 4

| Drop Chamber Grommet Selection (Select 1) | Cable Diameter Range                           |
|---|--|
| 0   | SOLID / PLUG                                   |
| 1   | 0.093" – 0.125" (2.4 – 3.2 mm)<br>ROUND CABLES |
| 2   | 0.156" – 0.170" (4.0 – 4.3 mm)<br>ROUND CABLES |
| 3   | FOR FLAT DROP CABLES                           |
| 4   | 0.187" – 0.220" (4.7 – 5.6 mm)<br>ROUND CABLES |

### Section 5

| Drop Chamber Adapter Type (Select 1) |                    |
|--------------------------------------|--------------------|
| N                                    | NONE               |
| 1                                    | <br>Simplex SC/APC |
| 2                                    | <br>Simplex SC/UPC |
| 3                                    | <br>Duplex LC/APC  |
| 4                                    | <br>Duplex LC/UPC  |

### Section 6

| Drop Chamber Adapter Quantity |
|-------------------------------|
| 0 to 16                       |

### Accessories

| Catalog Number | Description  |
|----------------|--|
| 8004121        | COYOTE ATC Aerial Mounting Bracket - ADSS Applications |



COYOTE ATC Splice Chamber



COYOTE ATC Drop Chamber



## COYOTE® IN-LINE RUNT CLOSURE

The **COYOTE In-Line RUNT Closure** has the versatility to be used in both distribution and fiber-to-the-premise (FTTP) networks for in-line or butt applications. The compact size allows for placement in small handholes and pedestals.

### FEATURES AND BENEFITS

- Internal organizer manages buffer tube or ribbon
- Multiple splice tray designs support mass fusion splicing, single fusion splicing, or a combination of both
- Flexible grommet sealing technology supports a wide range of flat and round cable profiles
- Factory-installed gasket allows re-entry and re-use
- Flame-retardant kits available
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirements

## Specifications

|  |  |
|--|--|
| Catalog Number   | 8006951, 8006952, 80061049   |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945), Mass Fusion (Deep Profile, LGSTR144) | 96, 144, 80, 288   |
| Number of Splice Trays – 80809958, 80813152, 80808945, LGSTR144  | 4, 4, 2, 2   |
| Cable Ports <sup>1</sup>   | 4 (2 at each end)  |
| Cable Diameters  | 0.093" – 1.20" (2.4 – 30.5 mm) and Flat Drop   |
| Configuration  | In-Line or Butt  |
| Application  | Direct Bury, Below Grade, Pole/Wall, Aerial only for 8006952, Indoor only for 80061049 |
| Ingress Protection   | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68                    |
| Size <sup>2</sup>  | 18.7" L x 10.0" W x 3.7" H (475 x 254 x 94 mm)   |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port

<sup>2</sup> Outermost part of the assembly.

## COYOTE In-Line RUNT Closure Kit Contents

| Catalog Number | Description  |
|----------------|--|
| 8006951        | In-Line RUNT Hermetically Sealed – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (1) 2-Hole Grommet 0.42" – 0.60" (10.7 – 15.2 mm), and (1) 4-Hole Grommet 0.30" – 0.43" (7.6 – 10.9 mm)  |
| 8006952        | In-Line RUNT Free Breathing – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (1) 2-Hole Grommet 0.42" – 0.60" (10.7 – 15.2 mm), and (1) 4-Hole Grommet 0.30" – 0.43" (7.6 – 10.9 mm)   |
| 80061049       | In-Line RUNT Flame Retardant, Hermetically Sealed – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (1) 2-Hole Grommet 0.42" – 0.60" (10.7 – 15.2 mm), (1) 4-Hole Grommet 0.30" – 0.43" (7.6 – 10.9 mm), (1) 6-Hole Grommet 0.125" - 0.250" (3.2 - 6.4 mm) and Flat Drop Cables, and a Torque Limiting Tool. For indoor use only. |

All kits include (1) Closure Assembly, (4) Silicone Grommets and Cable Restraint Hardware (Splice Trays and Hanger Brackets Sold Separately)



Hermetically Sealed  
Catalog Number: 8006951



Free Breathing  
Catalog Number: 8006952



Flame Retardant, Hermetically Sealed  
Catalog Number: 80061049




## ACCESSORIES

| Catalog Number | Description   |
|----------------|---|
| 80809958       | Splice Tray, COYOTE LITE-GRIP® Short, Low Profile, 24 CT., Single Fusion  |
| 80813152       | Splice Tray, COYOTE LITE-GRIP Short, Low Profile, 36 CT., Single Fusion   |
| 80808945       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 40 CT., Single Fusion  |
| LGSTR144       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 144 CT., Mass Fusion   |
| 8004160        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Mass Fusion  |
| 8004095        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Single Fusion  |
| 8003717        | Heat Shrink Splice Protector Kit – Includes (50) 60 mm Single Fusion  |
| 80811124       | 6 Position SC/APC Cross-Connect Bulkhead  |
| 80813787       | 6 Position ST/UPC Cross-Connect Bulkhead  |
| 80811123       | 8 Position SC/APC Cross-Connect Bulkhead  |
| 80811126       | 6 Position SC/UPC Cross-Connect Bulkhead  |
| 80811125       | 8 Position SC/UPC Cross-Connect Bulkhead  |
| 80809054       | Cross-Connect Bulkhead  |
| 8003733        | End Plate Kit – Includes (1) End Plate Cap with Integrated Gasket, (1) Package of Silicone Lubricant, and (3) Bolts |
| 80807794       | Hardware Bag  |
| 80805293       | Transport Tube Kit – Includes (6) 0.135" (3.4 mm) ID x 34" (863 mm) Long Transport Tubes                            |
| 80808639       | Transport Tube Kit – Includes (3) 0.25" (6.3 mm) ID x 6' (1828 mm) Long Transport Tubes                             |
| 8004180        | 6-Port Flat Drop Cable Retention Kit  |
| 8004181        | 8-Port Flat Drop Cable Retention Kit  |



6-Port Flat Drop Cable Retention Kit  
Catalog Number: 8004180

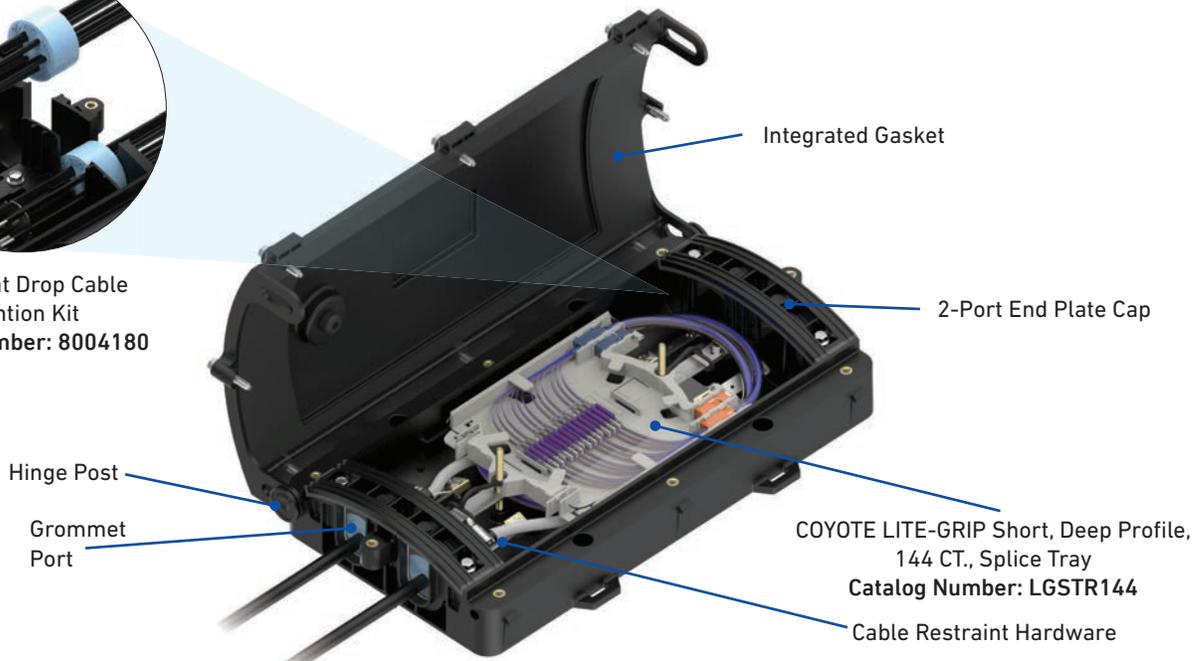

COYOTE In-Line RUNT, Hermetically Sealed  
144 CT. Ribbon Application

## MOUNTING BRACKETS

| Catalog Number | Description  |
|----------------|--|
| 8003797        | Aerial Mounting Bracket – Strand Applications            |
| 8004179        | Horizontal Aerial Mounting Bracket – Strand Applications |
| 8003864        | Aerial Mounting Bracket – ADSS Applications              |
| 8003703        | Pole/Wall Mounting Bracket                               |
| 8003835        | Universal Mounting Bracket – Handhole Applications       |
| 8003706        | Swing Arm Mounting Bracket                               |



Aerial Mounting Bracket for Strand Application  
Catalog Number: 8003797




Horizontal Aerial Mounting Bracket for Strand Application  
Catalog Number: 8004179



Pole/Wall Mounting Bracket  
Catalog Number: 8003703



Universal Mounting Bracket  
Catalog Number: 8003835

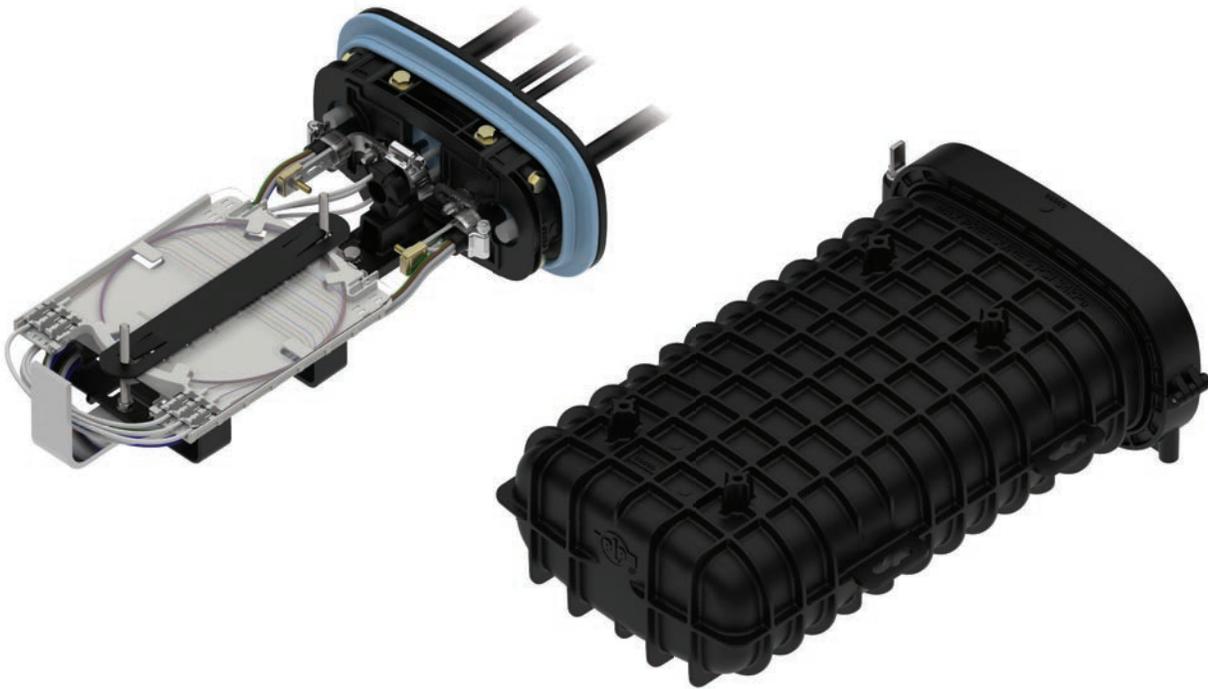

## COYOTE® ONE DOME CLOSURE

The **COYOTE ONE Dome Closure** has two organizer types to support either buffer tube or ribbon applications. These closures utilize PLP's patented segmented end plate design, which allows for independent access of each cable port without disturbing previously installed cables. This design also allows for ease of upgrading to a larger size without breaking the spliced joint, as your network continues to grow.

### FEATURES AND BENEFITS

- 3-Port segmented end plate design provides independent access to each cable port without disrupting the surrounding cables
- Tray design allows the removal from the stack to enable multiple splicers to work simultaneously
- Multiple splice tray designs support mass fusion splicing, single fusion splicing, or a combination of both
- Flexible grommet sealing technology supports a wide range of flat and round cable profiles
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirements

## BUFFER TUBE APPLICATIONS


### Specifications

|  |   |
|--|---|
| Catalog Number   | COY1-001  |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945) | 96, 144, 80   |
| Number of Splice Trays – 80809958, 80813152, 80808945  | 4, 4, 2   |
| Cable Ports <sup>1</sup>   | 3   |
| Cable Diameters  | 0.093" – 0.85" (2.4 – 21.6 mm) and Flat Drop                        |
| Ground Studs   | 3   |
| Configuration  | Butt  |
| Application  | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection   | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |
| Size <sup>2</sup>  | 16.0" L x 10.8" W x 5.7" H (406 x 274 x 145 mm)                     |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>2</sup> Outermost part of the assembly; includes the sealing collar.

## ORGANIZER ASSEMBLY

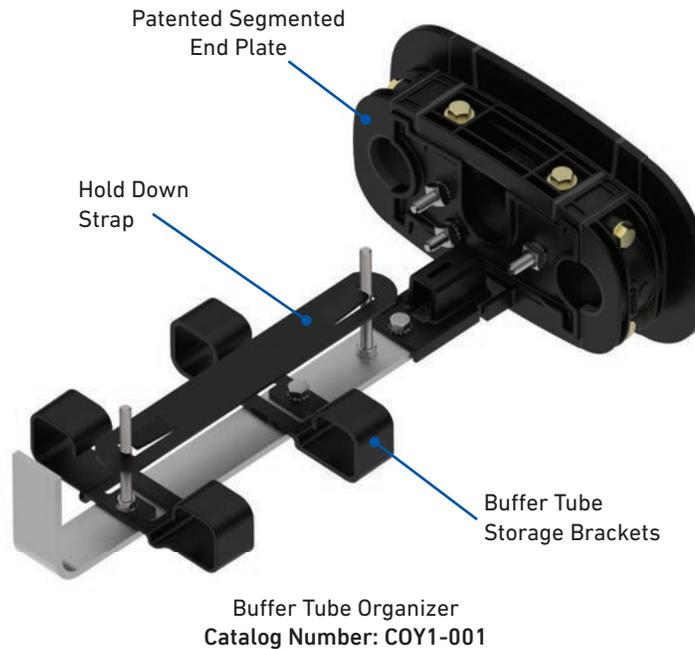

### COYOTE ONE Dome Closure Kit Contents

| Catalog Number | Description   |
|----------------|---|
| COY1-001       | COYOTE ONE Dome Closure for Buffer Tube – Includes (2) 2-Hole Grommets 0.42" – 0.60" (10.7 – 15.2 mm), and (1) 6-Hole Grommet 0.125" – 0.250" (3.2 – 6.4 mm) and Flat Drop Cables |

All kits include (1) COYOTE ONE End Plate with Organizer, (1) Dome, (1) Gasket, (1) Collar, (2) 2-Hole Grommets, (1) 6-Hole Grommet and Cable Restraint Hardware (Splice Trays and Hanger Brackets Sold Separately).



## UNITUBE OR BUFFER TUBE APPLICATIONS


### Specifications

|  |   |
|--|---|
| Catalog Number   | COY1-002  |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945), Mass Fusion (Deep Profile, LGSTR144) | 72, 108, 80, 288  |
| Number of Splice Trays – 80809958, 80813152, 80808945, LGSTR144  | 3, 3, 2, 2  |
| Cable Ports <sup>1</sup>   | 3   |
| Cable Diameters  | 0.093" – 0.85" (2.4 – 21.6 mm) and Flat Drop                        |
| Ground Studs   | 3   |
| Configuration  | Butt  |
| Application  | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection   | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |
| Size <sup>2</sup>  | 16.0" L x 10.8" W x 5.7" H (406 x 274 x 145 mm)                     |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>2</sup> Outermost part of the assembly; includes the sealing collar.

## ORGANIZER ASSEMBLY

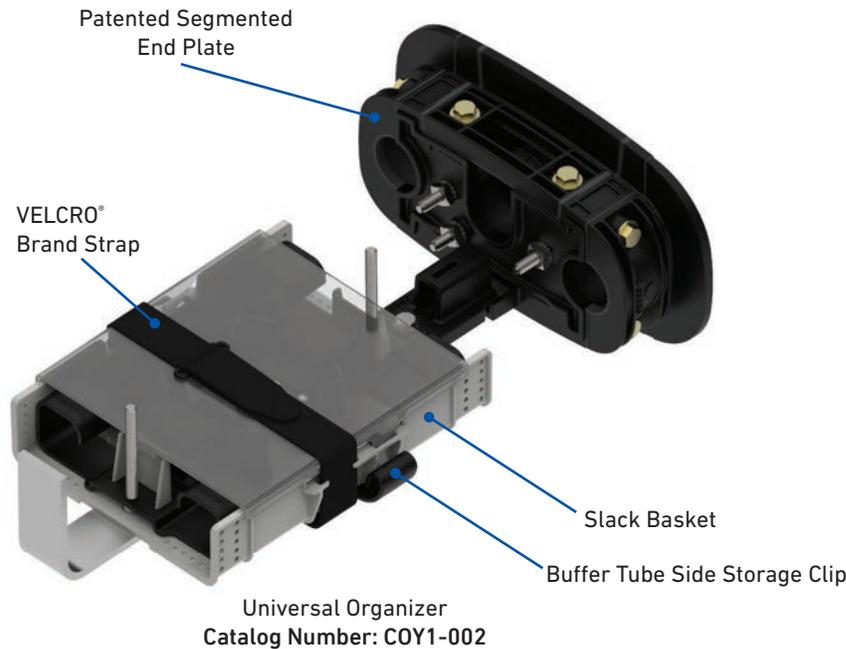

### COYOTE ONE Dome Closure Kit Contents

| Catalog Number | Description  |
|----------------|--|
| COY1-002       | COYOTE ONE Dome Closure for Buffer Tube or Ribbon – Includes (2) 2-Hole Grommets 0.42" – 0.60" (10.7 – 15.2 mm), (1) 6-Hole Grommet 0.125" - 0.250" (3.2 - 6.4 mm) and Flat Drop Cables, and (1) Transition Tubing Kit |

All kits include (1) COYOTE ONE End Plate with Organizer, (1) Dome, (1) Gasket, (1) Collar, (2) 2-Hole Grommets, (1) 6-Hole Grommet and Cable Restraint Hardware (Splice Trays and Hanger Brackets Sold Separately).

## ACCESSORIES AND MOUNTING BRACKETS


### COYOTE ONE Dome Closure Accessories

| Catalog Number | Description  |
|----------------|--|
| 80809958       | Splice Tray, COYOTE LITE-GRIP® Short, Low Profile, 24 CT., Single Fusion |
| 80813152       | Splice Tray, COYOTE LITE-GRIP Short, Low Profile, 36 CT., Single Fusion  |
| 80808945       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 40 CT., Single Fusion |
| LGSTR144       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 144 CT., Mass Fusion  |
| 8004160        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Mass Fusion       |
| 8004095        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Single Fusion     |
| 8003717        | Heat Shrink Splice Protector Kit – Includes (50) 60 mm Single Fusion     |
| 80810072       | Cross-Connect Bulkhead   |
| 80809205       | Strength Member Bracket Kit – Includes (2) Short L-Brackets              |
| 80811037       | 4-Port Cable Retention Bobbin Kit  |
| 80811036       | 6-Port Drop Cable Retention Bobbin Kit                                   |
| 80812928       | 6/8-Port Drop Cable Retention Bobbin Kit                                 |

### COYOTE ONE Dome Closure Mounting Brackets


| Catalog Number | Description   |
|----------------|---|
| EVOBKT-ALC     | Aerial Low Clearance Mounting Bracket – Strand Applications     |
| 8004031        | Aerial Low Clearance Mounting Bracket – ADSS Applications       |
| EVOBKT-AE      | Aerial Adjustable Offset Mounting Bracket – Strand Applications |
| 8004032        | Aerial Adjustable Offset Mounting Bracket – ADSS Applications   |
| EVOBKT-PWM     | Pole/Wall Mounting Bracket                                      |
| 8003835        | Universal Mounting Bracket – Handhole Applications              |
| 8004003        | Manhole Support Bracket   |

## DIMENSIONS

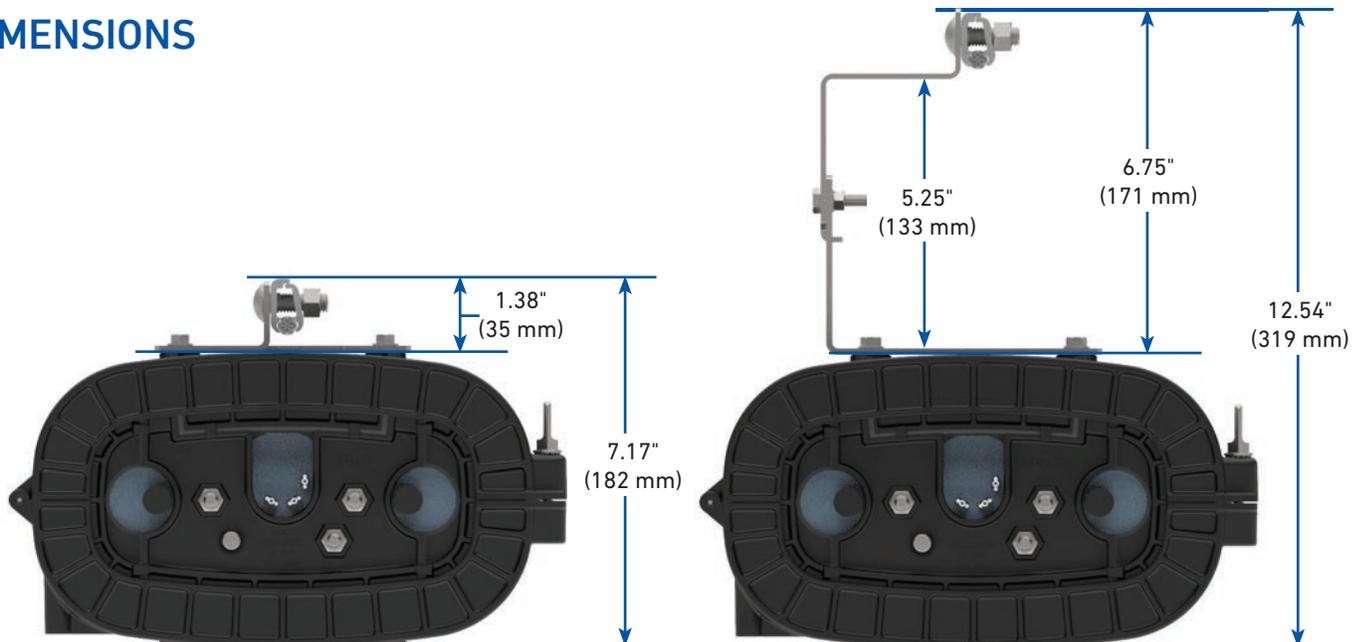

COYOTE ONE with Aerial Low Clearance Mounting Brackets  
for Strand Applications  
Catalog Number: EVOBKT-ALC

COYOTE ONE with Aerial Adjustable Offset Mounting  
Brackets for Strand Applications  
Catalog Number: EVOBKT-AE

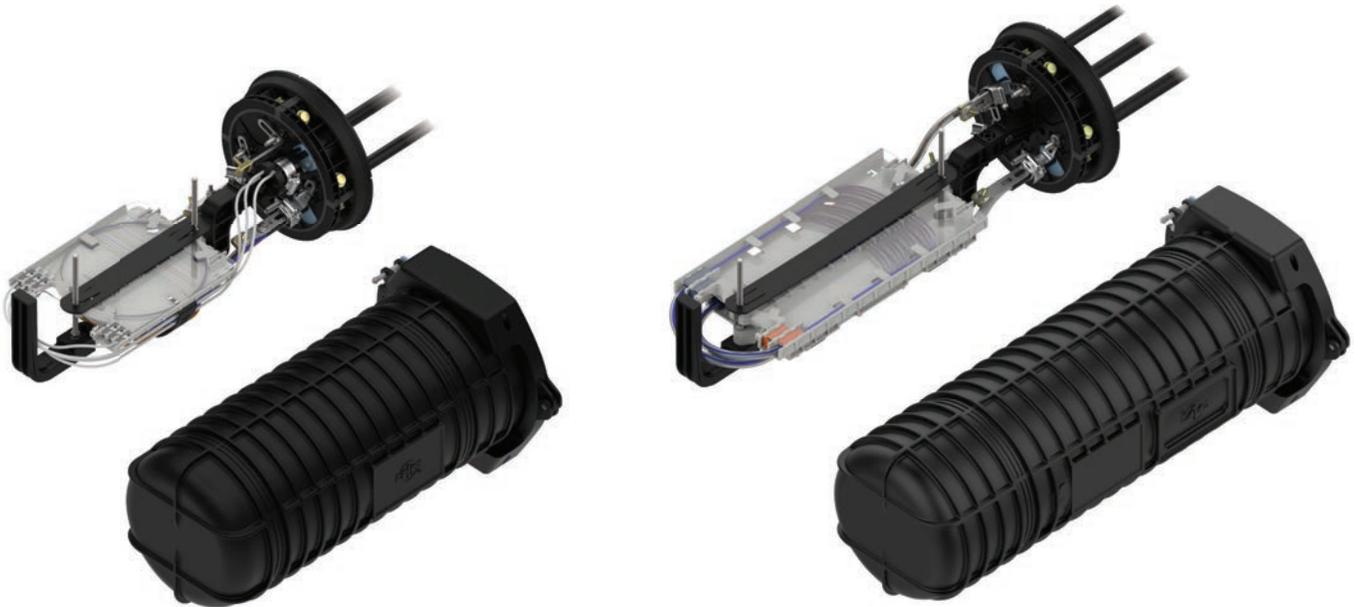

## COYOTE® DOME CLOSURE

6.5" X 17" AND 6.5" X 22"

The **COYOTE 6.5" Dome Closure** offers two length options of 17" and 22" to support either buffer tube or ribbon fiber applications. These closures utilize PLP's patented segmented end plate design, which allows for easy installation of a variety of cable sizes in conjunction with the grommets. This segmented end plate design also allows for ease of upgrading to a larger size if your network continues to grow.

### FEATURES AND BENEFITS

- 4-Port segmented end plate design provides independent access to each cable port without disrupting surrounding cables
- Tray design allows the removal from the stack to enable multiple splicers to work simultaneously
- Multiple tray designs support mass fusion splicing, single fusion splicing, or a combination of both
- Flexible grommet sealing technology supports a wide range of flat and round cable profiles
- Flame-retardant kits available
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirements


# COYOTE® 6.5" X 17" DOME CLOSURE

| Specifications   | Buffer  | Ribbon  |
|--|---|---|
| <b>Catalog Numbers</b>   | <b>8006944</b>  | <b>8006945</b>  |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945), Mass Fusion (Deep Profile, LGSTR144) | 144, 216, 120, N/A  | 144, 216, 120, 432  |
| Number of Splice Trays – 80809958, 80813152, 80808945, LGSTR144  | 6, 6, 3, N/A  | 6, 6, 3, 3  |
| Cable Ports <sup>1</sup>   | 4   | 4   |
| Cable Diameters  | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        |
| Ground Studs   | 4   | 4   |
| Configuration  | Butt  | Butt  |
| Application  | Direct Bury, Below Grade, Pole/Wall, Aerial                         | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection   | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |
| Size <sup>2</sup>  | 8.6" W x 17.9" L (218 x 455 mm)                                     | 8.6" W x 17.9" L (218 x 455 mm)                                     |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>2</sup> Outermost part of the assembly; includes the sealing collar.

## COYOTE® 6.5" X 17" DOME CLOSURE ORGANIZER ASSEMBLIES

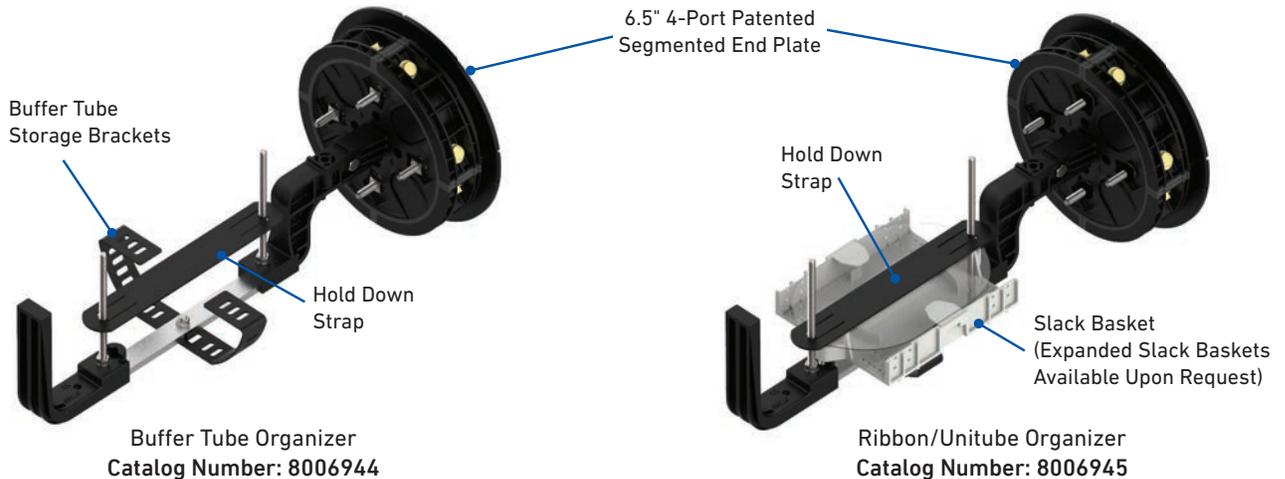

### COYOTE 6.5" x 17" Dome Closure Kit Contents

| Catalog Number | Description   |
|----------------|---|
| 8006944        | COYOTE 6.5" x 17" Dome Closure for Buffer Tube – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 - 15.2 mm) and (2) 1-Hole Grommets 0.60" – 0.85" (15.2 - 21.6 mm)   |
| 8006945        | COYOTE 6.5" x 17" Dome Closure for Ribbon – Includes (2) 1-Hole Grommets 0.40"–0.60"(10.2–15.2mm),(2)1-HoleGrommets0.60"–0.85"(15.2–21.6mm), (1) Transition Tubing Kit, and (2) Transport Tubing Kits                                 |
| 800012940      | Flame Retardant COYOTE 6.5" x 17" Dome Closure for Buffer Tube – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), and (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm)  |
| 800012941      | Flame Retardant COYOTE 6.5" x 17" Dome Closure for Ribbon – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (1) Transition Tubing Kit, and (2) Transport Tubing Kits |

All kits include (1) COYOTE 6.5" End Plate with Organizer, (1) Dome, (1) Gasket, (1) Collar, (4) 1-Hole Grommets and Cable Restraint Hardware (Splice Trays and Hanger Brackets Sold Separately).

Telcordia® is a registered trademark of Telcordia Technologies, Inc., now part of Ericsson.

©2022 Preformed Line Products CO-CA-1004-16




## COYOTE® 6.5" X 22" DOME CLOSURE

| Specifications  | Buffer  | Ribbon  |
|---|---|---|
| Catalog Numbers   | 8006877   | 8006878   |
| Splice Capacity (Maximum) – Single Fusion (Standard Profile, 80810086), Single Fusion (Deep Profile, LGSTS72), Mass Fusion (Deep Profile, LGSTR216) | 144, 216, N/A   | 144, 216, 648   |
| Number of Splice Trays – 80810086, LGSTS72, LGSTR216  | 4, 3, N/A   | 4, 3, 3   |
| Cable Ports <sup>1</sup>  | 4   | 4   |
| Cable Diameters   | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        |
| Ground Studs  | 4   | 4   |
| Configuration   | Butt  | Butt  |
| Application   | Direct Bury, Below Grade, Pole/Wall, Aerial                         | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection  | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |
| Size <sup>2</sup>   | 8.6" W x 22.6" L (218 x 574 mm)                                     | 8.6" W x 22.6" L (218 x 574 mm)                                     |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>2</sup> Outermost part of the assembly; includes the sealing collar.

## ORGANIZER ASSEMBLIES

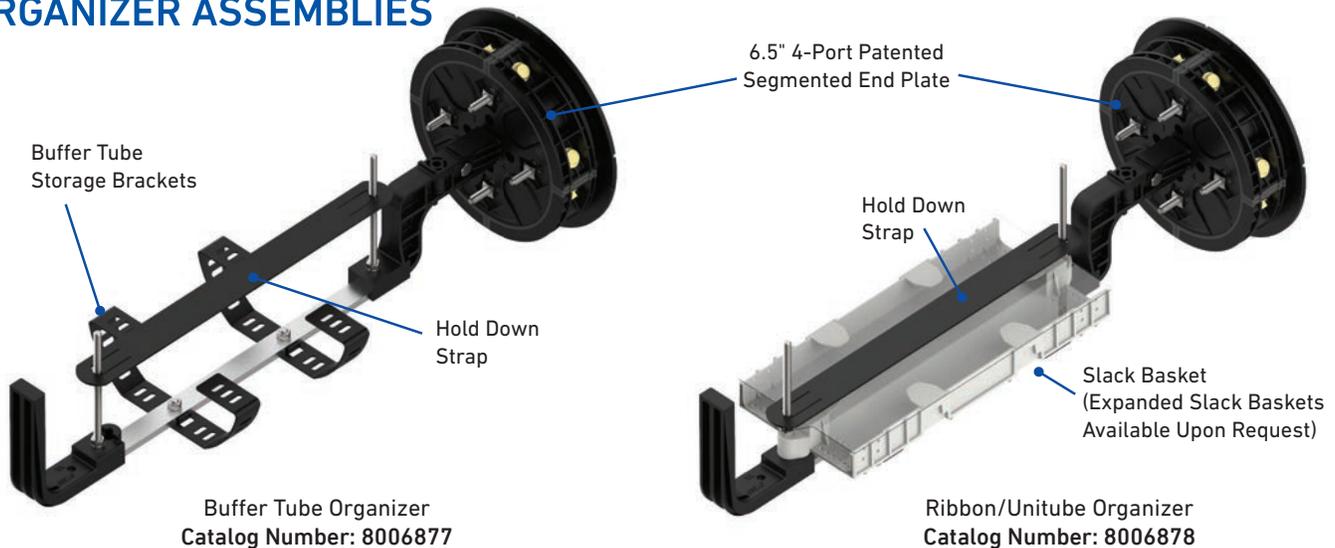

## COYOTE 6.5" x 22" Dome Closure Kit Contents

| Catalog Number | Description   |
|----------------|---|
| 8006877        | COYOTE 6.5" x 22" Dome Closure for Buffer Tube – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), and (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm)  |
| 8006878        | COYOTE 6.5" x 22" Dome Closure for Ribbon – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (1) Transition Tubing Kit, and (2) Transport Tubing Kits                 |
| 800012942      | Flame Retardant COYOTE 6.5" x 22" Dome Closure for Buffer Tube – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), and (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm)  |
| 800012943      | Flame Retardant COYOTE 6.5" x 22" Dome Closure for Ribbon – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (1) Transition Tubing Kit, and (2) Transport Tubing Kits |

All kits include (1) COYOTE 6.5" End Plate with Organizer, (1) Dome, (1) Gasket, (1) Collar, (4) 1-Hole Grommets and Cable Restraint Hardware (Splice Trays and Hanger Brackets Sold Separately).

Telcordia® is a registered trademark of Telcordia Technologies, Inc., now part of Ericsson.

©2022 Preformed Line Products CO-CA-1004-16


## ACCESSORIES AND MOUNTING BRACKETS

### COYOTE 6.5" Dome Closure Accessories

| Catalog Number | Description   |
|----------------|---|
| 80809958       | Splice Tray, COYOTE LITE-GRIP® Short, Low Profile, 24 CT., Single Fusion    |
| 80813152       | Splice Tray, COYOTE LITE-GRIP Short, Low Profile, 36 CT., Single Fusion     |
| 80808945       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 40 CT., Single Fusion    |
| LGSTR144       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 144 CT., Mass Fusion     |
| 80810086       | Splice Tray, COYOTE LITE-GRIP Long, Standard Profile, 36 CT., Single Fusion |
| LGSTS72        | Splice Tray, COYOTE LITE-GRIP Long, Deep Profile, 72 CT., Single Fusion     |
| LGSTR216       | Splice Tray, COYOTE LITE-GRIP Long, Deep Profile, 216 CT., Mass Fusion      |
| 8004160        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Mass Fusion          |
| 8004095        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Single Fusion        |
| 8003717        | Heat Shrink Splice Protector Kit – Includes (50) 60 mm Single Fusion        |
| COYEPFIX1      | End Plate Assembly Fixture for 6.5" and 9.5" Domes                          |
| 80808997       | End Plate Gasket for 6.5" Domes   |
| 80807332       | Latching Collar for 6.5" Domes  |
| 80061200       | Breakaway Bonding Plate for 6.5" Domes                                      |
| 80809205       | Strength Member Bracket Kit – Includes (2) Short L-Brackets                 |
| 80808651       | Strength Member Bracket Kit – Includes (4) Long L-Brackets                  |
| 80808878       | Large Strength Member Adapter Kit   |
| 80811037       | 4-Port Cable Retention Bobbin Kit   |
| 80811036       | 6-Port Drop Cable Retention Bobbin Kit                                      |
| 80812928       | 6/8-Port Drop Cable Retention Bobbin Kit                                    |

### COYOTE 6.5" Dome Closure Mounting Brackets

| Catalog Number | Description   |
|----------------|---|
| 8003831        | Aerial Mounting Bracket – Strand Applications                   |
| 8004035        | Aerial Adjustable Offset Mounting Bracket – Strand Applications |
| 8003833        | Aerial Mounting Bracket – ADSS Applications                     |
| 8004036        | Aerial Adjustable Offset Mounting Bracket – ADSS Applications   |
| 8003702        | Pole/Wall Mounting Bracket                                      |
| 8003835        | Universal Mounting Bracket – Handhole Applications              |
| 8003707        | Swing Arm for Handhole Applications                             |
| 8004003        | Manhole Support Bracket   |

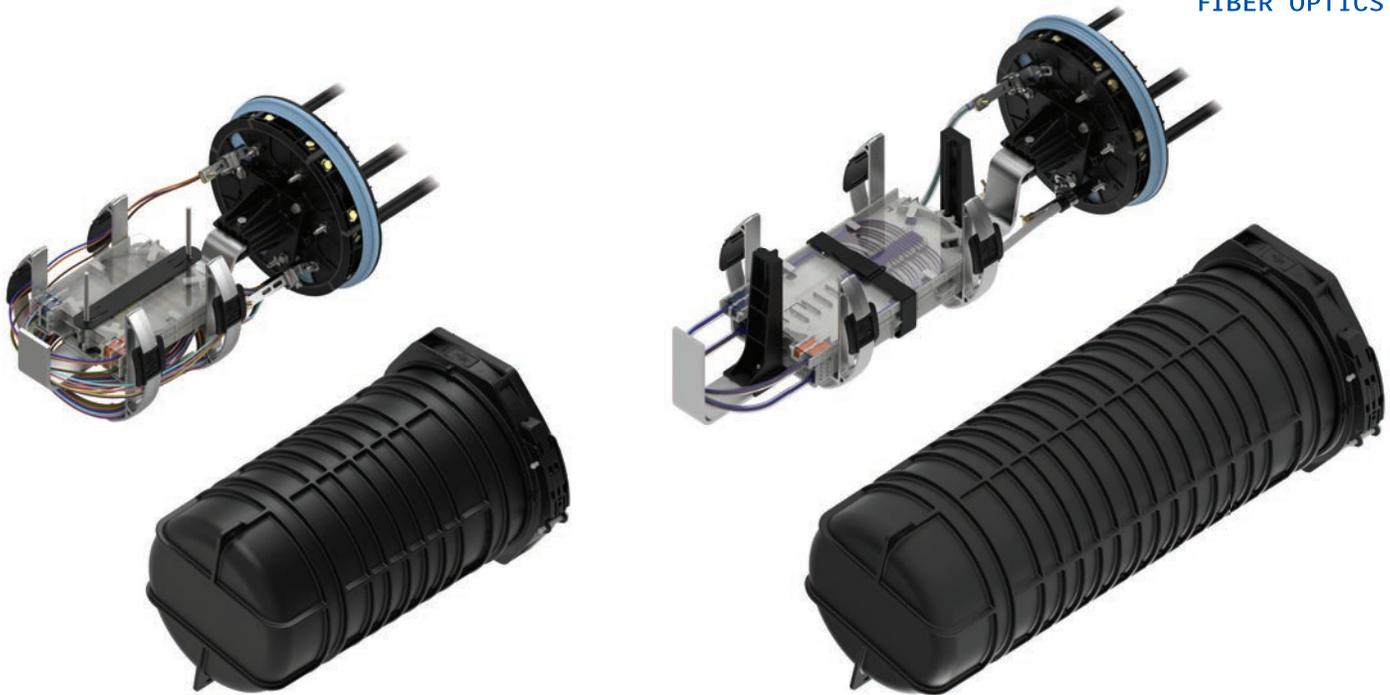

## COYOTE® DOME CLOSURE

9.5" X 19" AND 9.5" X 28"

The **COYOTE 9.5" Dome Closure** offers two length options of 19" and 28" to support either buffer tube or ribbon fiber applications. These closures utilize PLP's patented segmented end plate design, which allows for easy installation of a variety of cable sizes in conjunction with the grommets.

### FEATURES AND BENEFITS

- 7-Port segmented end plate design provides independent access to each cable port without disrupting surrounding cables
- Tray design allows the removal from the stack to enable multiple splicers to work simultaneously
- Multiple tray designs support mass fusion splicing, single fusion splicing, or a combination of both
- Flexible grommet sealing technology supports a wide range of flat and round cable profiles
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirements


## COYOTE® 9.5" X 19" DOME CLOSURE

| Specifications  | Buffer  | Ribbon  |
|---|---|---|
| <b>Catalog Number</b>   | <b>COYD919B-000</b>   | <b>COYD919R-000</b>   |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945), Mass Fuson (Deep Profile, LGSTR144) | 288, 432, 240, N/A  | 288, 432, 240, 864  |
| Number of Splice Trays – 80809958, 80813152, 80808945, LGSTR144   | 12, 12, 6, N/A  | 12, 12, 6, 6  |
| Cable Ports <sup>1</sup>  | 7   | 7   |
| Cable Diameters   | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        |
| Ground Studs  | 7   | 7   |
| Configuration   | Butt  | Butt  |
| Application   | Direct Bury, Below Grade, Pole/Wall, Aerial                         | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection  | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |
| Size <sup>2</sup>   | 13.3" W x 20.4" L (338 x 509 mm)                                    | 13.3" W x 20.4" L (338 x 509 mm)                                    |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>2</sup> Outermost part of the assembly; includes the sealing collar.

## COYOTE® 9.5" X 19" DOME CLOSURE ORGANIZER ASSEMBLIES

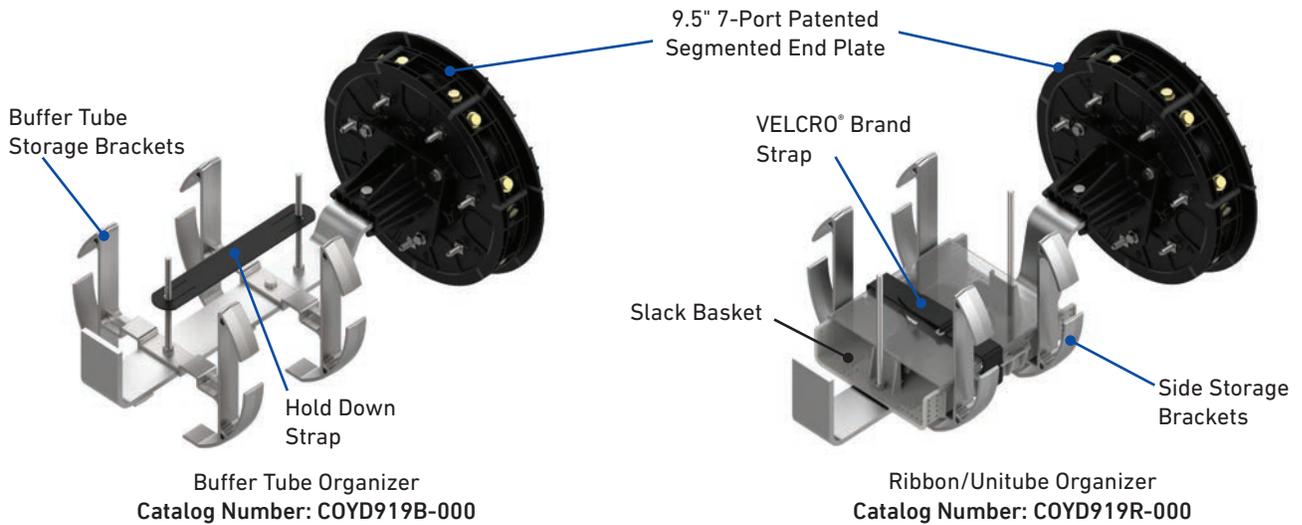

### COYOTE 9.5" x 19" Dome Closure Kit Contents

| Catalog Number | Description  |
|----------------|--|
| COYD919B-000   | COYOTE 9.5" x 19" Dome Closure for Buffer Tube – Includes (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm) and (2) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm)                        |
| COYD919R-000   | COYOTE 9.5" x 19" Dome Closure for Ribbon – Includes (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (2) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm), and (1) Transition Tubing Kit |

All kits include (1) COYOTE 9.5" End Plate with Organizer, (1) Dome, (1) Gasket, (1) Collar, (4) 1-Hole Grommets and Cable Restraint Hardware (Splice Trays and Hanger Brackets Sold Separately).

Telcordia® is a registered trademark of Telcordia Technologies, Inc., now part of Ericsson.

VELCRO® Brand is a registered trademark of Velcro BVBA.

©2022 Preformed Line Products CO-CA-1004-16




## COYOTE® 9.5" X 28" DOME CLOSURE

| Specifications  | Buffer  | Ribbon  | Max Tray  |
|---|---|---|---|
| Catalog Number  | 80061055  | 80061056  | 80061057  |
| Splice Capacity (Maximum) – Single Fusion (Standard Profile, 80810086), Single Fusion (Deep Profile, LGSTS72), Mass Fusion (Deep Profile, LGSTR216) | 360, 432, N/A   | 396, 576, 1728  | 540, 720, 2160  |
| Number of Splice Trays – 80810086, LGSTS72, LGSTR216  | 10, 6, N/A  | 11, 8, 8  | 15, 10, 10  |
| Cable Ports <sup>1</sup>  | 7   | 7   | 7   |
| Cable Diameters   | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        |
| Ground Studs  | 7   | 7   | 7   |
| Configuration   | Butt  | Butt  | Butt  |
| Application   | Direct Bury, Below Grade, Pole/Wall, Aerial                         | Direct Bury, Below Grade, Pole/Wall, Aerial                         | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection  | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |
| Size <sup>2</sup>   | 13.3" W x 29.4" L (338 x 749 mm)                                    | 13.3" W x 29.4" L (338 x 749 mm)                                    | 13.3" W x 29.4" L (338 x 749 mm)                                    |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>2</sup> Outermost part of the assembly; includes the sealing collar.

## ORGANIZER ASSEMBLIES

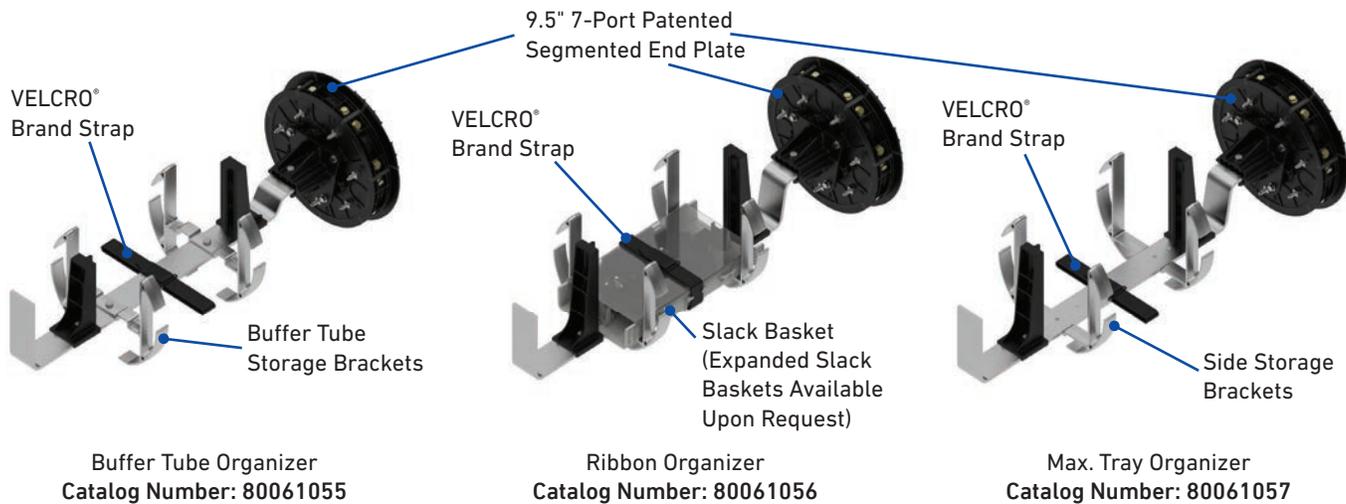

## COYOTE 9.5" x 28" Dome Closure Kit Contents

| Catalog Number | Description   |
|----------------|---|
| 80061055       | COYOTE 9.5" x 28" Dome Closure for Buffer Tube – Includes (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm) and (2) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm)   |
| 80061056       | COYOTE 9.5" x 28" Dome Closure for Ribbon – Includes (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (2) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm), (2) Transition Tubing Kit, and (2) Transport Tubing Kits |
| 80061057       | COYOTE 9.5" x 28" Dome Closure for Buffer Tube – Includes and (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm) and (2) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm)   |

All kits include (1) COYOTE 9.5" End Plate with Organizer, (1) Dome, (1) Gasket, (1) Collar, (4) 1-Hole Grommets and Cable Restraint Hardware (Splice Trays and Hanger Brackets Sold Separately).

Telcordia® is a registered trademark of Telcordia Technologies, Inc., now part of Ericsson.

VELCRO® Brand is a registered trademark of Velcro BVBA.

©2022 Preformed Line Products CO-CA-1004-16


## ACCESSORIES AND MOUNTING BRACKETS

### COYOTE 9.5" Dome Closure Accessories

| Catalog Number | Description  |
|----------------|--|
| 80809958       | Splice Tray, COYOTE LITE-GRIP® Short, Low Profile, 24 CT., Single Fusion       |
| 80813152       | Splice Tray, COYOTE LITE-GRIP Short, Low Profile, 36 CT., Single Fusion        |
| 80808945       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 40 CT., Single Fusion       |
| LGSTR144       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 144 CT., Mass Fusion        |
| 80810086       | Splice Tray, COYOTE LITE-GRIP Long, Standard Profile, 36 CT., Single Fusion    |
| LGSTS72        | Splice Tray, COYOTE LITE-GRIP Long, Deep Profile, 72 CT., Single Fusion        |
| LGSTR216       | Splice Tray, COYOTE LITE-GRIP Long, Deep Profile, 216 CT., Mass Fusion         |
| 8004160        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Mass Fusion             |
| 8004095        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Single Fusion           |
| 8003717        | Heat Shrink Splice Protector Kit – Includes (50) 60 mm Single Fusion           |
| 80061335       | Deep Slack Basket (2.05" Deep) Kit for up to 576 Expressed Ribbon Applications |
| 80061495       | Deep Slack Basket (2.85" Deep) Kit for up to 864 Expressed Ribbon Applications |
| COYEPFIX1      | End Plate Assembly Fixture for 6.5" and 9.5" Domes                             |
| 80813717       | End Plate Gasket for 9.5" Domes  |
| 80808528-1     | Latching Collar for 9.5" Domes   |
| 80061201       | Breakaway Bonding Plate for 9.5" Domes   |
| 80809205       | Strength Member Bracket Kit – Includes (2) Short L-Brackets                    |
| 800015236      | Strength Member Bracket Kit – Includes (3) Long L-Brackets and (3) Hose Clamps |
| 80808651       | Strength Member Bracket Kit – Includes (4) Long L-Brackets                     |
| 80808878       | Large Strength Member Adapter Kit  |
| 80811037       | 4-Port Cable Retention Bobbin Kit  |
| 80811036       | 6-Port Drop Cable Retention Bobbin Kit   |
| 80812928       | 6/8-Port Drop Cable Retention Bobbin Kit                                       |

### COYOTE 9.5" Dome Closure Mounting Brackets

| Catalog Number | Description   |
|----------------|---|
| 8003940        | Aerial Mounting Bracket – Strand Applications                   |
| 8004037        | Aerial Adjustable Offset Mounting Bracket – Strand Applications |
| 8003869        | Aerial Mounting Bracket – ADSS Applications                     |
| 8004038        | Aerial Adjustable Offset Mounting Bracket – ADSS Applications   |
| 8003942        | Pole/Wall Mounting Bracket                                      |
| 8003835        | Universal Mounting Bracket – Handhole Applications              |
| 8003941        | Aerial Mounting Bracket – End Plate Mounting Applications       |
| 8004003        | Manhole Support Bracket   |

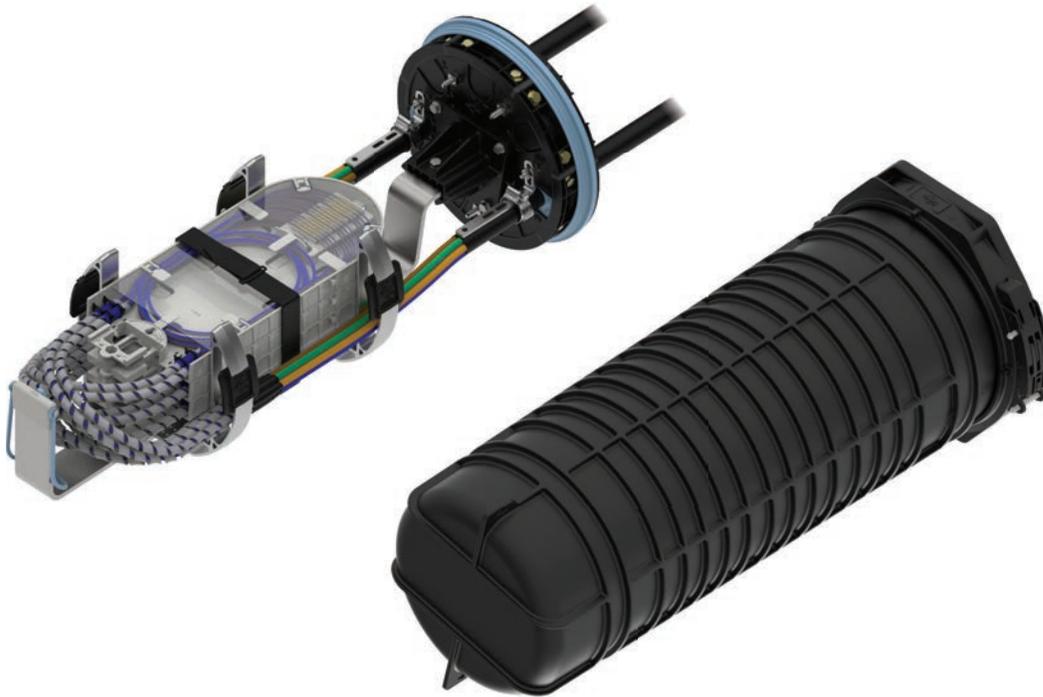

## COYOTE® HD DOME CLOSURE

The **COYOTE HD (High-Density) Dome Closure** offers an alternative fiber organizer to support high-density splice applications within the same footprint as PLP's existing 9.5" x 28" COYOTE Dome Closure. The new organizer architecture provides open access for fiber routing, reduces cable sheath openings, and simplifies assembly: all factors that save you time and money. When combined with PLP's patented segmented end plate design, the closure system offers the ultimate level of flexibility to address your complex network needs.

### FEATURES AND BENEFITS

- Maximum Splice Capacity of 1728 or 3456 depending on cable construction
- 7-Port segmented end plate design provides independent access to each cable port without disrupting surrounding cables
- Two splice tray designs to support mass fusion splicing, single fusion, or a combination of both
- Modular tray design permits trays to hinge upward or be removed from the stack to allow multiple splicers to work simultaneously
- Grommet range now accepts fiber optic cable entry of up to 1.38" in diameter
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirement

## FOR CABLES UNDER 1.25" IN DIAMETER


| Specifications   | No Slack Basket   | Standard Slack Basket   | Deep Metal Slack Basket   |
|--|---|---|---|
| <b>Catalog Number</b>  | <b>80061406</b>   | <b>80061407</b>   | <b>80061594</b>   |
| Splice Capacity (Maximum) – Single Fusion (Thin, 80813123), Mass Fusion (Thin, 80813122), Mass Fusion (Deep, 80813121), Mass Fusion (Deep, 80813779) | 864, 3456 <sup>1</sup> , 1728, 3456                                 | 576, 2304 <sup>1</sup> , 1152, 2304                                 | 432, 1728 <sup>1</sup> , 864, 1728                                  |
| Number of Splice Trays – 80813123, 80813122 <sup>1</sup> , 80813121, 80813779  | 12, 12, 6, 6  | 8, 8, 4, 4  | 6, 6, 3, 3  |
| Cable Ports <sup>2</sup>   | 7   | 7   | 7   |
| Cable Diameters  | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        |
| Ground Studs   | 7   | 7   | 7   |
| Configuration  | Butt  | Butt  | Butt  |
| Application  | Direct Bury, Below Grade, Pole/Wall, Aerial                         | Direct Bury, Below Grade, Pole/Wall, Aerial                         | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection   | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |
| Size <sup>3</sup>  | 13.3" W x 29.4" L (338 x 747 mm)                                    | 13.3" W x 29.4" L (338 x 747 mm)                                    | 13.3" W x 29.4" L (338 x 747 mm)                                    |

<sup>1</sup> The 80813122 thin-profile splice tray can only be used for cables that contain SpiderWeb Ribbon (SWR®) – AFL, Rollable Ribbon (RR) – OFS, Pliable Ribbon – Sumitomo, or FlexRibbon™ – Prysmian

<sup>2</sup> Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>3</sup> Outermost part of the assembly.

## COYOTE® HD DOME CLOSURE RIBBON ORGANIZER ASSEMBLIES

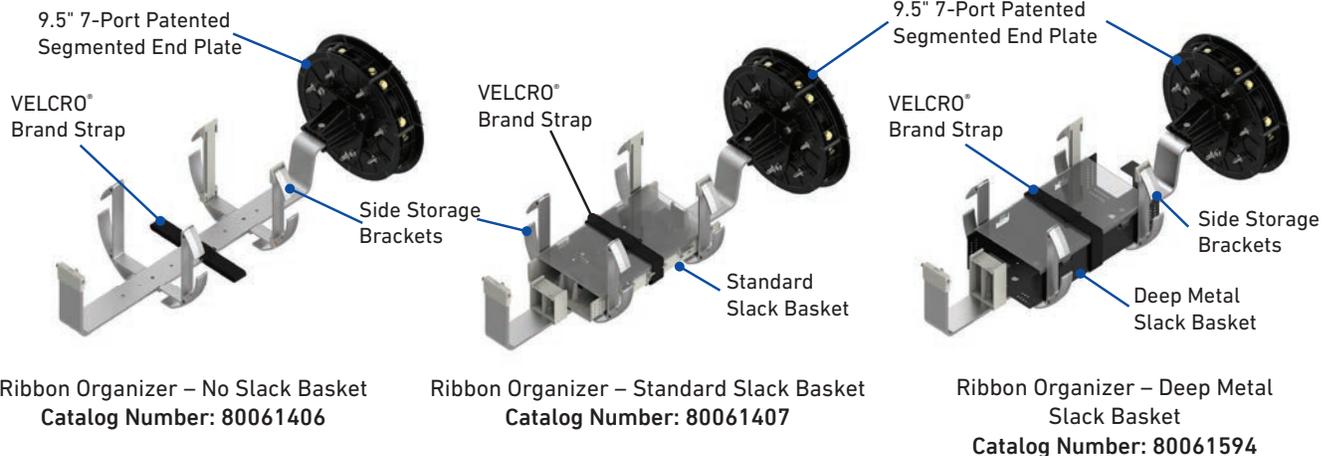

### COYOTE HD Dome Closure Kit Contents

| Catalog Number | Description  |
|----------------|--|
| 80061406       | COYOTE HD Dome Closure for Ribbon – Includes (2) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm) and (2) 1-Hole Grommets 1.00" – 1.25" (25.4 – 31.8 mm)   |
| 80061407       | COYOTE HD Dome Closure with Slack Basket for Ribbon – Includes (2) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm), (2) 1-Hole Grommets 1.00" – 1.25" (25.4 – 31.8 mm), and (1) 6-Pack, 36" long of 0.25" ID Transition Tubing            |
| 80061594       | COYOTE HD Dome Closure with Deep Metal Slack Basket for Ribbon – Includes (2) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm), (2) 1-Hole Grommets 1.00" – 1.25" (25.4 – 31.8 mm), and (1) 6-Pack, 36" Long of 0.25" ID Transition Tubing |

All kits include (1) COYOTE HD End Plate Organizer, (1) Dome, (1) Gasket, (1) Collar, (4) 1-Hole Grommets, (1) 12-Pack of 20" Long 0.50" ID Spiral Tubing, and Cable Restraint Hardware.



## FOR CABLES OVER 1.25" IN DIAMETER

| Specifications   | No Slack Basket   | Standard Slack Basket   |
|--|---|---|
| <b>Catalog Number</b>  | <b>80061408</b>   | <b>80061409</b>   |
| Splice Capacity (Maximum) – Single Fusion (Thin, 80813123), Mass Fusion (Thin, 80813122), Mass Fusion (Deep, 80813121), Mass Fusion (Deep, 80813779) | 864, 3456 <sup>1</sup> , 1728, 3456                                 | 576, 2304 <sup>1</sup> , 1152, 2304                                 |
| Number of Splice Trays – 80813123, 80813122 <sup>1</sup> , 80813121, 80813779  | 12, 12, 6, 6  | 8, 8, 4, 4  |
| Cable Ports <sup>2</sup>   | 7   | 7   |
| Cable Diameters <sup>3</sup>   | 0.093" – 1.38" (2.4 – 35.0 mm) and Flat Drop                        | 0.093" – 1.38" (2.4 – 35.0 mm) and Flat Drop                        |
| Ground Studs   | 7   | 7   |
| Configuration  | Butt  | Butt  |
| Application  | Direct Bury, Below Grade, Pole/Wall, Aerial                         | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection   | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |
| Size <sup>4</sup>  | 13.3" W x 29.4" L (338 x 747 mm)                                    | 13.3" W x 29.4" L (338 x 747 mm)                                    |


<sup>1</sup> The 80813122 thin-profile splice tray can only be used for cables that contain SpiderWeb Ribbon (SWR®) – AFL, Rollable Ribbon (RR) – OFS, Pliable Ribbon – Sumitomo, or FlexRibbon™ – Prysmian

<sup>2</sup> Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>3</sup> Cables with diameters larger than 1.25" can only be used in end plate port numbers 3 and 6.

<sup>4</sup> Outermost part of the assembly; includes the sealing collar.

## RIBBON ORGANIZER ASSEMBLIES

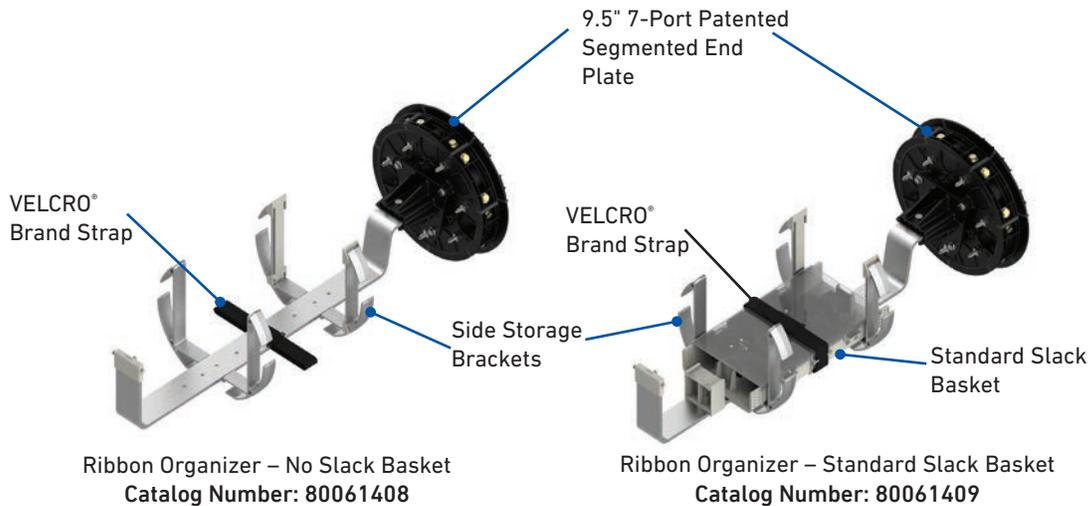

### COYOTE HD Dome Closure Kit Contents

| Catalog Number | Description   |
|----------------|---|
| 80061408       | COYOTE HD Dome Closure for Ribbon – Includes (2) 1-Hole Grommets 1.00" – 1.25" (25.4 – 31.8 mm) and (2) 1-Hole Grommets 1.25" – 1.38" (31.8 – 35.0 mm)  |
| 80061409       | COYOTE HD Dome Closure with Slack Basket for Ribbon – Includes (2) 1-Hole Grommets 1.00" – 1.25" (25.4 – 31.8 mm), (2) 1-Hole Grommets 1.25" – 1.38" (31.8 – 35.0 mm), and (1) 6-Pack, 36" long of 0.25" ID Transition Tubing |

All kits include (1) COYOTE HD End Plate Organizer, (1) Dome, (1) Gasket, (1) Collar, (4) 1-Hole Grommets, (1) 12-Pack of 20" Long 0.50" ID Spiral Tubing, and Cable Restraint Hardware.

Telcordia® is a registered trademark of Telcordia Technologies, Inc. now part of Ericsson. SWR® is a registered trademark of AFL. FlexRibbon™ is a registered trademark of Prysmian.

VELCRO® Brand is a registered trademark of Velcro BVBA.

## BUFFER TUBE APPLICATIONS


### Specifications

|   |   |
|---|---|
| Catalog Number  | 80061488  |
| Splice Capacity (Maximum) – Single Fusion (Thin, 80813123, 72 CT.), Single Fusion (Thin, 80813301, 108 CT.) | 576, 864  |
| Number of Splice Trays – 80813123, 80813301   | 8, 8  |
| Cable Ports <sup>1</sup>  | 7   |
| Cable Diameters   | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        |
| Ground Studs  | 7   |
| Configuration   | Butt  |
| Application   | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection  | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |
| Size <sup>2</sup>   | 13.3" W x 29.4" L (338 x 747 mm)                                    |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>2</sup> Outermost part of the assembly; includes the sealing collar.

## BUFFER TUBE ORGANIZER ASSEMBLY

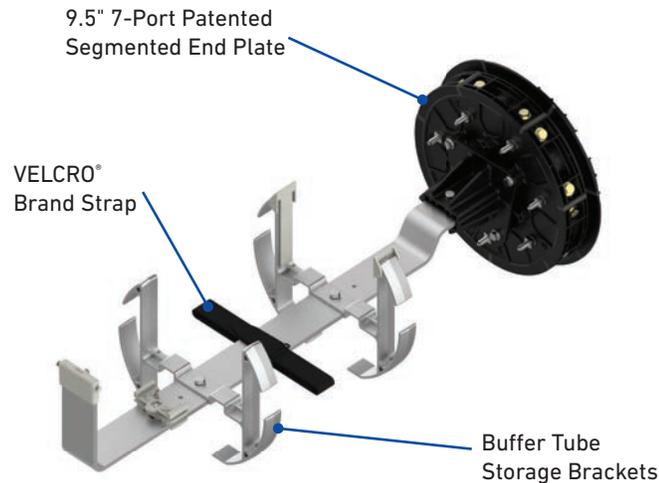

Buffer Tube  
Catalog Number: 80061488

### COYOTE HD Dome Closure Kit Contents for Buffer Tube Applications

| Catalog Number | Description  |
|----------------|--|
| 80061488       | COYOTE HD Dome Closure for Single Fusion – Includes (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (2) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm) |


All kits include (1) COYOTE HD End Plate Organizer, (1) Dome, (1) Gasket, (1) Collar, (4) 1-Hole Grommets, and Cable Restraint Hardware




## ACCESSORIES




Deep Profile Mass Fusion Flip Tray  
288 Splice CT.  
Catalog Number: 80813121

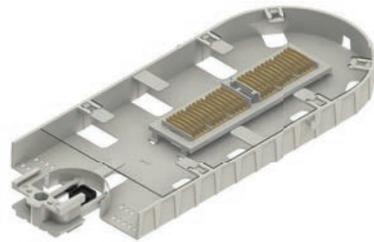

Deep Profile Mass Fusion Flip Tray  
576 Splice CT.  
Catalog Number: 80813779

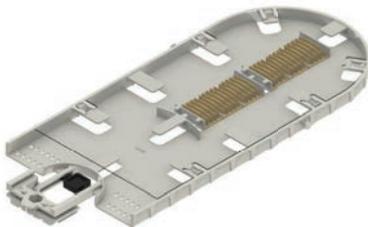

Thin Profile Mass Fusion Flip Tray  
288 Splice CT.  
Catalog Number: 80813122

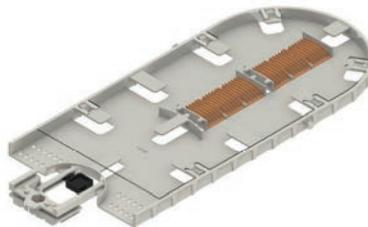

Thin Profile Single Fusion Flip Tray  
72 Splice CT.  
Catalog Number: 80813123




Thin Profile Single Fusion Flip Tray  
108 Splice CT.  
Catalog Number: 80813301

## COYOTE HD Dome Closure Accessories

| Catalog Number | Description  |
|----------------|--|
| 80813121       | Deep Profile Mass Fusion Flip Tray, 288 CT.  |
| 80813779       | Deep Profile Mass Fusion Flip Tray, 576 CT.  |
| 80813122       | Thin Profile Mass Fusion Flip Tray, 288 CT.  |
| 80813123       | Thin Profile Single Fusion Flip Tray, 72 CT.   |
| 80813301       | Thin Profile Single Fusion Flip Tray, 108 CT.  |
| 8004160        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Mass Fusion   |
| 8004095        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Single Fusion   |
| 8003717        | Heat Shrink Splice Protector Kit – Includes (50) 60 mm Single Fusion   |
| 80813770       | Shallow Slack Basket Kit for up to 432 Expressed Mass Fusion Applications  |
| 80813267       | Deep Slack Basket (2.85" Deep) Kit for up to 864 Expressed Ribbon Applications. For the COYOTE HD (High-Density) Dome Closure and the COYOTE HD Stainless Dome Closure Only. |
| 80061500       | Breakout Kit for Unitube Ribbon Applications   |
| COYEPFIX1      | End Plate Fixture Assembly for 6.5" and 9.5" Domes   |
| 8003839        | End Plate Kit for 9.5" Domes for cables under 1.25"  |
| 80813717       | End Plate Gasket for 9.5" Domes  |
| 80808528-1     | Latching Collar for 9.5" Domes   |
| 80061201       | Breakaway Bonding Plate for 9.5" Domes   |
| 80809205       | Strength Member Bracket Kit – Includes (2) Short L-Brackets  |
| 800015236      | Strength Member Bracket Kit – Includes (3) Long L-Brackets and (3) Hose Clamps   |
| 80808651       | Strength Member Bracket Kit – Includes (4) Long L-Brackets   |
| 80813361       | Extended Strength Member Bracket Kit for Large Central Strength Members – Includes (2) Long L-Brackets and Lugs  |
| 80813124       | Splice Tray Locking Pin Kit – Includes (5) Tray Locking Pins   |
| 80813125       | Splice Tray Tether Kit – Includes (6) Splice Tray Tether Straps  |

## MOUNTING BRACKETS

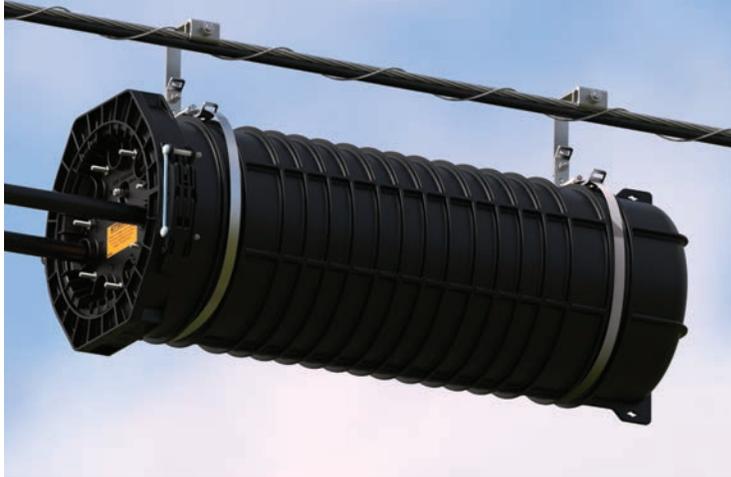


Adjustable Aerial Offset Mounting Bracket for Strand Applications  
 Catalog Number: 8004037



Pole/Wall Mounting Bracket  
 Catalog Number: 8003942

### COYOTE HD Dome Closure Mounting Brackets

| Catalog Number | Description   |
|----------------|---|
| 8003940        | Aerial Mounting Bracket – Strand Applications                   |
| 8004037        | Aerial Adjustable Offset Mounting Bracket – Strand Applications |
| 8003869        | Aerial Mounting Bracket – ADSS Applications                     |
| 8004038        | Aerial Adjustable Offset Mounting Bracket – ADSS Applications   |
| 8003942        | Pole/Wall Mounting Bracket                                      |
| 8003835        | Universal Mounting Bracket – Handhole Applications              |
| 8003941        | Swing Arm for Handhole Applications                             |
| 8004003        | Manhole Support Bracket   |

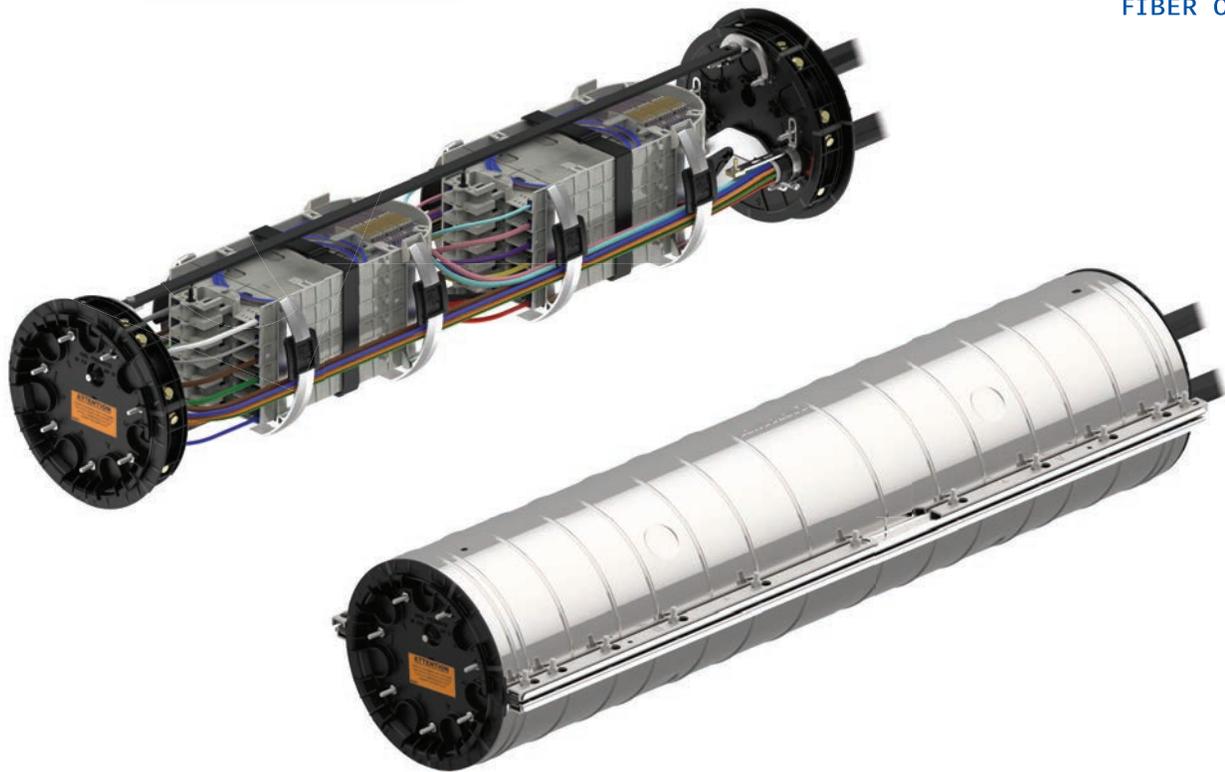

## COYOTE® HD STAINLESS STEEL SPLICE CASE 9.5" X 45"

The **COYOTE HD (High-Density) Stainless Steel Splice Case** combines the durable stainless steel outer shell from PLP's ARMADILLO® splice cases with the patented segmented end plates used in COYOTE closures to create a unique hybrid closure. The field-proven stainless steel shells can withstand even the most severe environments, providing the ultimate protection for high-count splice applications. The new organizer architecture provides open access for fiber routing, reduces cable sheath openings, and simplifies assembly. The HD Stainless offers the ultimate level of flexibility and protection to address your high-count network needs.


### FEATURES AND BENEFITS

- Maximum Splice Capacity of 3456 or 6912 depending on cable construction
- 7-Port segmented end plate design provides independent access to each cable port without disrupting surrounding cables
- Stainless steel shells and the LOCKBAR™ Fastening System have been a trusted industry solution for many years
- Multiple splice tray designs to support single- or mass-fusion splicing, or a combination of both
- Modular tray design permits trays to hinge upward or be removed from the stack to allow multiple splicers to work simultaneously
- Grommet range now accepts fiber optic cable entry of up to 1.38" in diameter
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirement

## RELIABLE AND ADAPTABLE COMPONENTS

The **COYOTE® HD Stainless** combines PLP’s most successful lines into a unique hybrid closure that offers superior performance and endless versatility for virtually any high-count splicing application. PLP’s **ARMADILLO®** Stainless Steel Splice Cases have been the industry standard since 1975, protecting communication cables under the most severe conditions. The stainless steel shells are precision formed with an inner

neoprene liner. When combined with the **LOCKBAR™** fastening system, the closure has a gasket-sealing system that does not require a re-entry kit or cleaning upon re-entry. The patented segmented end plates used in COYOTE closures have been proven to decrease assembly time, thereby reducing overall costs.

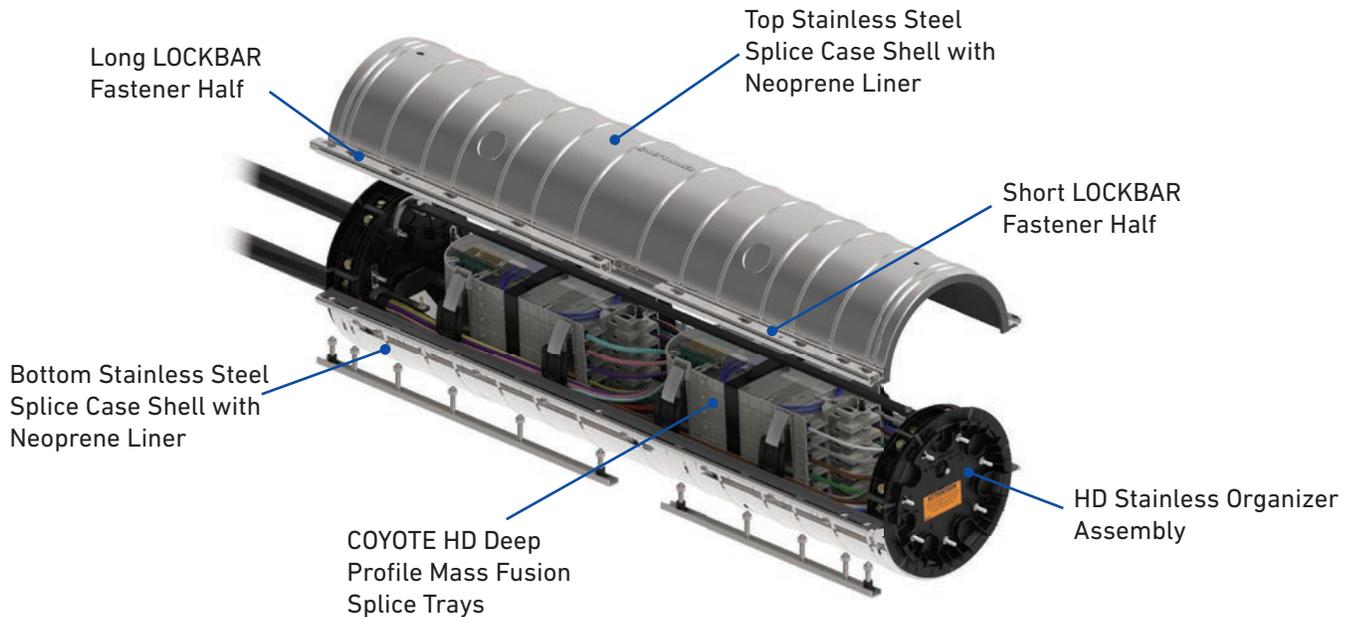

| Specifications   | WITHOUT Slack Basket  | WITH Standard Slack Basket  | WITH Deep Metal Slack Basket  |
|--|---|---|---|
| <b>Catalog Number</b>  | 80061637, 80061637FR  | 80061638, 80061638FR  | 80061639, 80061639FR  |
| Splice Capacity (Maximum) – Single Fusion (Thin, 80813123), Mass Fusion (Thin, 80813122), Mass Fusion (Deep, 80813121), Mass Fusion (Deep, 80813779) | 1728, 6912 <sup>1</sup> , 3456, 6912                                | 1440, 5760 <sup>1</sup> , 2880, 5760                                | 1296, 5184 <sup>1</sup> , 2592, 5184                                |
| Number of Splice Trays – 80813123, 80813122 <sup>1</sup> , 80813121, 80813779  | 24, 24, 12, 12  | 20, 20, 10, 10  | 18, 18, 9, 9  |
| Cable Ports <sup>2</sup>   | 14  | 14  | 14  |
| Cable Diameters <sup>3</sup>   | 0.093" – 1.38"<br>(2.4 – 35.0 mm)                                   | 0.093" – 1.38"<br>(2.4 – 35.0 mm)                                   | 0.093" – 1.38"<br>(2.4 – 35.0 mm)                                   |
| Ground Studs   | 14  | 14  | 14  |
| Configuration  | In-Line or Butt   | In-Line or Butt   | In-Line or Butt   |
| Application  | Direct Bury, Below Grade, Pole/Wall, Aerial                         | Direct Bury, Below Grade, Pole/Wall, Aerial                         | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection   | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |
| Size <sup>4</sup>  | 11.8" W x 45.0" L<br>(300 x 1143 mm)                                | 11.8" W x 45.0" L<br>(300 x 1143 mm)                                | 11.8" W x 45.0" L<br>(300 x 1143 mm)                                |

<sup>1</sup> The 80813122 thin-profile splice tray can only be used for cables that contain SpiderWeb Ribbon (SWR) – AFL, Rollable Ribbon (RR) – OFS, Pliable Ribbon – Sumitomo, or FlexRibbon™ – Prysmian

<sup>2</sup> Multi-hole grommets allow for more than one cable to enter each cable port.


<sup>3</sup> Cables with diameters larger than 1.25" can only be used in end plate port numbers 3 and 6.

<sup>4</sup> Outermost part of the assembly.

Telcordia® is a registered trademark of Telcordia Technologies, Inc. now part of Ericsson. SWR® is a registered trademark of AFL. FlexRibbon™ is a registered trademark of Prysmian.



## RIBBON ORGANIZER ASSEMBLIES

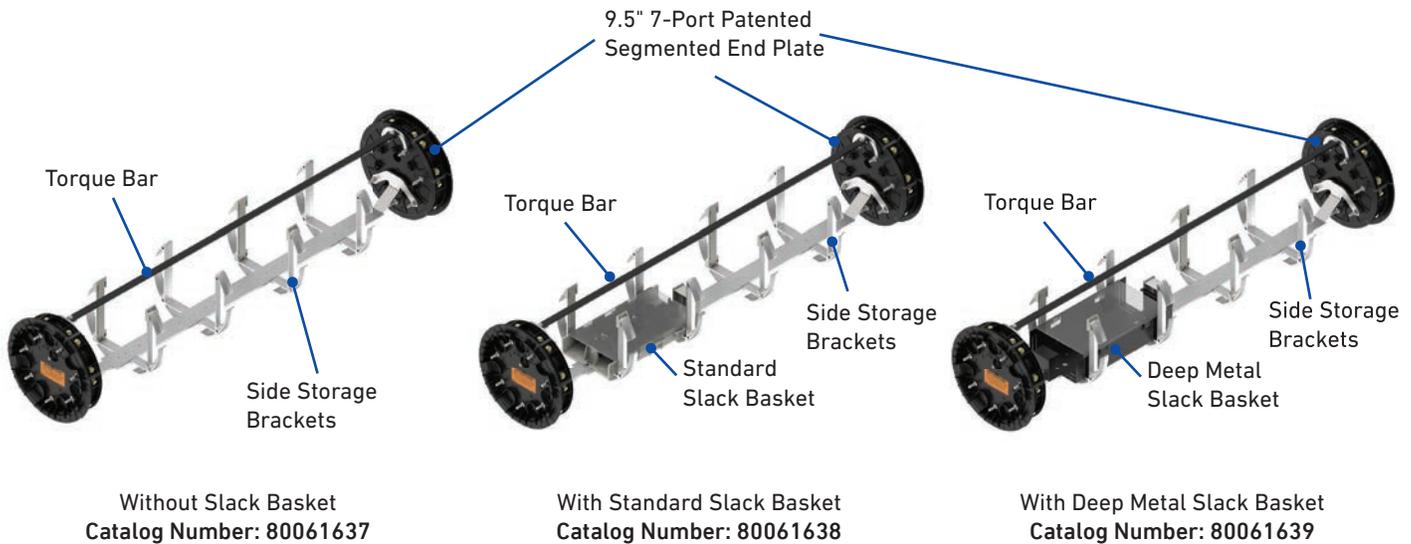

### COYOTE HD Stainless Kit Contents

| Catalog Number | Description  |
|----------------|--|
| 80061637       | COYOTE HD Stainless for Ribbon – Includes (4) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm), (2) 1-Hole Grommets 1.00" – 1.25" (25.4 – 31.8 mm), and (2) 1-Hole Grommets 1.25" – 1.38" (31.8 – 35.0 mm)   |
| 80061638       | COYOTE HD Stainless with Standard Slack Basket for Ribbon – Includes (4) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm), (2) 1-Hole Grommets 1.00" – 1.25" (25.4 – 31.8 mm), (2) 1-Hole Grommets 1.25" – 1.38" (31.8 – 35.0 mm), and (2) 6-Pack, 36" long of 0.25" ID Transition Tubing  |
| 80061639       | COYOTE HD Stainless with Metal Slack Basket for Ribbon – Includes (4) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm), (2) 1-Hole Grommets 1.00" – 1.25" (25.4 – 31.8 mm), and (2) 1-Hole Grommets 1.25" – 1.38" (31.8 – 35.0 mm), and (2) 6-Pack, 36" long of 0.25" ID Transition Tubing   |
| 80061637FR     | Flame Retardant COYOTE HD Stainless for Ribbon – Includes (4) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm), (2) 1-Hole Grommets 1.00" – 1.25" (25.4 – 31.8 mm), (2) 1-Hole Grommets 1.25" – 1.38" (31.8 – 35.0 mm), and (1) Roll of Aluminum Foil Tape   |
| 80061638FR     | Flame Retardant COYOTE HD Stainless with Standard Slack Basket for Ribbon – Includes (4) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm), (2) 1-Hole Grommets 1.00" – 1.25" (25.4 – 31.8 mm), (2) 1-Hole Grommets 1.25" – 1.38" (31.8 – 35.0 mm), (2) 6-Pack, 36" long of 0.25" ID Transition Tubing, and (1) Roll of Aluminum Foil Tape  |
| 80061639FR     | Flame Retardant COYOTE HD Stainless with Metal Slack Basket for Ribbon – Includes (4) 1-Hole Grommets 0.85" – 1.00" (21.6 – 25.4 mm), (2) 1-Hole Grommets 1.00" – 1.25" (25.4 – 31.8 mm), and (2) 1-Hole Grommets 1.25" – 1.38" (31.8 – 35.0 mm), (2) 6-Pack, 36" long of 0.25" ID Transition Tubing, and (1) Roll of Aluminum Foil Tape |

All kits include (1) COYOTE HD Stainless End Plate Organizer, (1) Shell Kit, (1) LOCKBAR™ Fasteners, (8) 1-Hole Grommets, (2) 12-pack, 20" long of 3/8" ID Split Braided Wrap, Black, (1) 9.5" Bonding Plate and Cable Restraint Hardware.

## ACCESSORIES AND MOUNTING BRACKETS

### COYOTE HD Stainless Accessories


| Catalog Number | Description   |
|----------------|---|
| 80813121       | Deep Profile Mass Fusion Flip Tray, 288 CT.   |
| 80813779       | Deep Profile Mass Fusion Flip Tray, 576 CT.   |
| 80813122       | Thin Profile Mass Fusion Flip Tray, 288 CT.   |
| 80813123       | Thin Profile Single Fusion Flip Tray, 72 CT.  |
| 80813301       | Thin Profile Single Fusion Flip Tray, 108 CT.   |
| 8004160        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Mass Fusion  |
| 8004095        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Single Fusion  |
| 8003717        | Heat Shrink Splice Protector Kit – Includes (50) 60 mm Single Fusion  |
| 80813770       | Standard Slack Basket Kit for up to 432 Expressed Mass Fusion Applications  |
| 80813267       | Deep Slack Basket (2.85" Deep) Kit for up to 864 Expressed Ribbon Applications. For the COYOTE HD (High-Density) Dome Closure and the COYOTE HD Stainless Dome Closure Only |
| 80061500       | Breakout Kit for Unitube Ribbon Applications  |
| COYEPFIX1      | End Plate Fixture Assembly for 6.5" and 9.5" Domes  |
| 8003839        | End Plate Kit for 9.5" Domes for cables under 1.25"   |
| 80061201       | Breakaway Bonding Plate for 9.5" Domes  |
| 80809205       | Strength Member Bracket Kit – Includes (2) Short L-Brackets   |
| 800015236      | Strength Member Bracket Kit – Includes (3) Long L-Brackets and (3) Hose Clamps  |
| 80808651       | Strength Member Bracket Kit – Includes (4) Long L-Brackets  |
| 80813124       | Splice Tray Locking Pin Kit – Includes (5) Tray Locking Pins  |
| 8000428        | Socket Tool Kit – Includes (1) Ratchet Wrench, (1) Deep Well Socket 7/16", (1) Deep Well Socket 1/2", (1) 6" Long Extension and (1) Torque Wrench                           |
| 8000420        | Socket Tool Kit – Includes (1) Ratchet Wrench, (1) Deep Well Socket 7/16", (1) Deep Well Socket 1/2", and (1) 6" Long Extension   |
| 80803967       | Torque Wrench with Ratchet Head 3/8" Drive  |
| 80801151       | Deep Well Socket 1/2"   |

### COYOTE HD Stainless Mounting Brackets


| Catalog Number | Description  |
|----------------|--|
| 8003426        | Adjustable Aerial Mounting Bracket – Strand Applications |
| 8004203        | Manhole Support Bracket                                  |



Adjustable Aerial Mountings  
Bracket for Strand Application-  
**Catalog Number: 8003426**

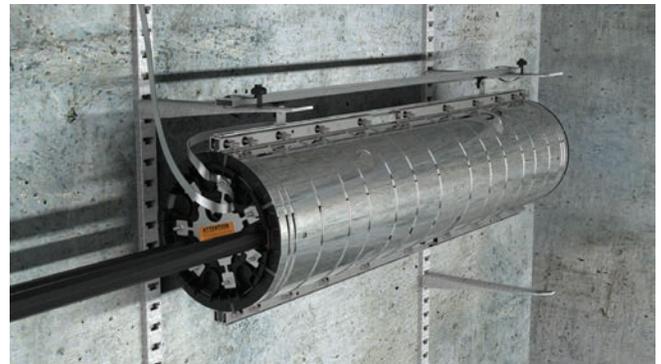

Manhole Support Bracket  
**Catalog Number: 8004203**

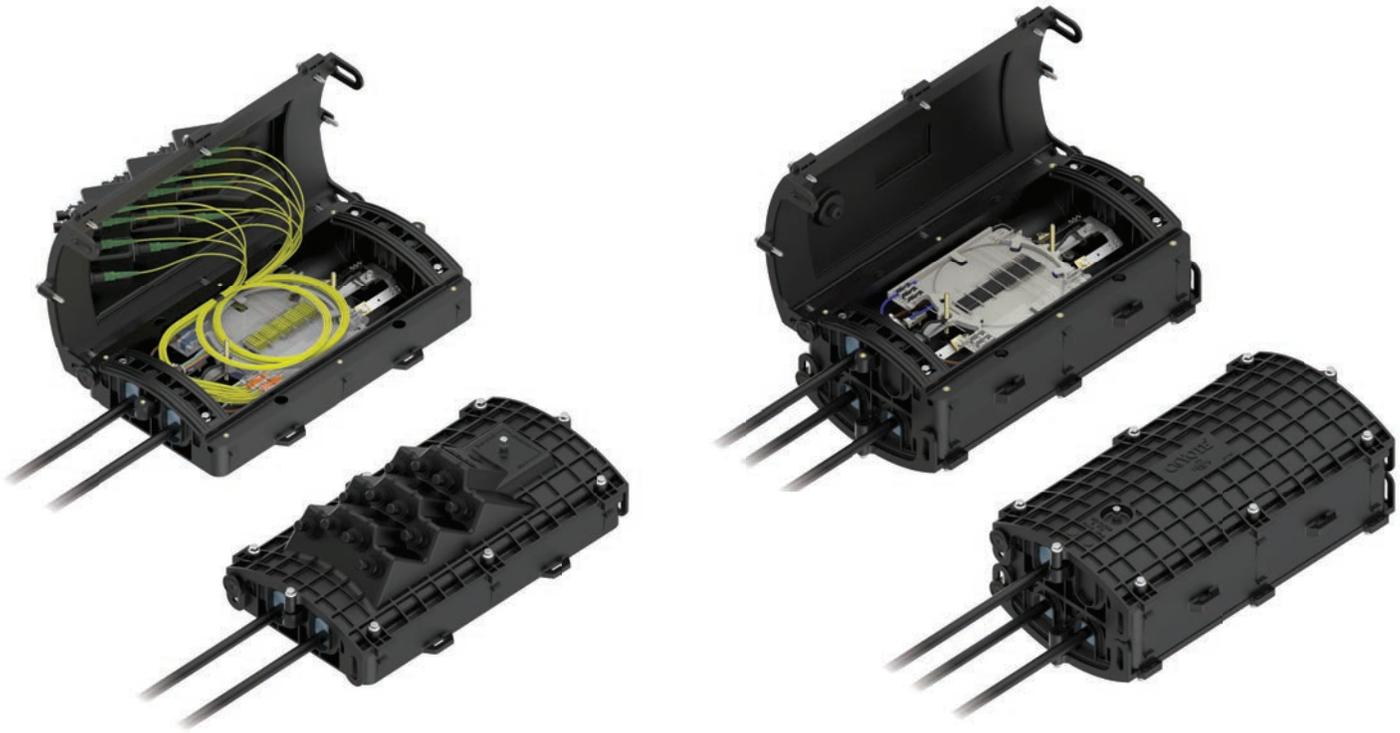

## COYOTE® TERMINAL CLOSURE SINGLE AND DUAL CHAMBER

The **COYOTE Terminal Closure** is the ideal choice for network designs that can be adapted as your network grows. Externally mounted OptiTap® hardened adapters allow for future installation of drops without closure re-entry. Additional drop capacity can be achieved through cable entry ports in the closure base, providing additional flexibility to support closures deeper in your network. The patented dual chamber design provides two distinct chambers that can be configured differently. A sealed window designed within the dual chamber allows fiber to be passed between chambers. The COYOTE Terminal Closure family is the adaptable choice for today's networks, where change is the only constant.

### FEATURES AND BENEFITS

- Available in 6, 9, or 12-Port OptiTap covers
- Designed to permit field installation and removal of hardened adapters
- Provided with SC/APC pigtail kits
- Internal organizer manages buffer tube or ribbon
- Flexible grommet sealing technology supports a wide range of flat and round cable profiles
- Flame-retardant kits available
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirements

## COYOTE® SINGLE CHAMBER TERMINAL CLOSURE

### Specifications

|  |   |
|--|---|
| Catalog Number   | 800012002, 8006993, 8006953, 8006954, 8006955, 800012003, 80061067  |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945), Mass Fusion (Deep Profile, LGSTR144) | 96, 144, 80, 288  |
| Number of Splice Trays – 80809958, 80813152, 80808945, LGSTR144  | 4, 4, 2, 2  |
| Cable Ports <sup>1</sup>   | 4 (2 at each end)   |
| Cable Diameters  | 0.093" – 1.20" (2.4 – 30.5 mm) and Flat Drop                        |
| Adapter Quantity (Maximum)   | 12  |
| Configuration  | In-Line or Butt   |
| Application  | Direct Bury, Below Grade, Pole/Wall, Aerial                         |
| Ingress Protection   | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |
| Size <sup>2</sup>  | 18.7" L x 10.0" W x 5.1" H (475 x 254 x 130 mm)                     |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>2</sup> Outermost part of the assembly; includes the hardened adapters

### COYOTE Single Chamber Terminal Kit Contents

| Catalog Number | Description   | Cover      |                  |               |
|----------------|---|------------|------------------|---------------|
|                |   | Cover Type | Adapter Quantity | Plug Quantity |
| 800012002      | COYOTE Single Chamber Terminal Closure Includes – 2 OptiTap® Adapters | 6-Port     | 2                | 4             |
| 8006993        | COYOTE Single Chamber Terminal Closure Includes – 3 OptiTap Adapters  | 6-Port     | 3                | 3             |
| 8006953        | COYOTE Single Chamber Terminal Closure Includes – 4 OptiTap Adapters  | 6-Port     | 4                | 2             |
| 8006954        | COYOTE Single Chamber Terminal Closure Includes – 6 OptiTap Adapters  | 6-Port     | 6                | 0             |
| 8006955        | COYOTE Single Chamber Terminal Closure Includes – 8 OptiTap Adapters  | 9-Port     | 8                | 1             |
| 800012003      | COYOTE Single Chamber Terminal Closure Includes – 9 OptiTap Adapters  | 9-Port     | 9                | 0             |
| 80061067       | COYOTE Single Chamber Terminal Closure Includes – 12 OptiTap Adapters | 12-Port    | 12               | 0             |

All kits include (1) Closure Assembly, (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (1) 2-Hole Grommet 0.42" – 0.60" (10.7 – 15.2 mm), (1) 4-Hole Grommet 0.30" – 0.43" (7.6 – 10.9 mm), (1) Splice Tray (Cat. No. 80808945), Pigtails and Cable Restraint Hardware



6-Port COYOTE Single Chamber Terminal Closure  
Catalog Number: 8006954



9-Port COYOTE Single Chamber Terminal Closure  
Catalog Number: 800012003



12-Port COYOTE Single Chamber Terminal Closure  
Catalog Number: 80061067



## COYOTE® DUAL CHAMBER TERMINAL CLOSURE

### Specifications

|  |  |
|--|--|
| Catalog Number   | 80061029, 800011830, 8006991, 800012140, 800012605, 800011839, 8006956 |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945), Mass Fusion (Deep Profile, LGSTR144) | 192, 288, 160, 576   |
| Number of Splice Trays – 80809958, 80813152, 80808945, LGSTR144  | 8, 8, 4, 4   |
| Cable Ports <sup>1</sup>   | 8 (4 at each end)  |
| Cable Diameters  | 0.093" – 1.20" (2.4 – 30.5 mm) and Flat Drop                           |
| Adapter Quantity (Maximum)   | 24   |
| Configuration  | In-Line or Butt  |
| Application  | Direct Bury, Below Grade, Pole/Wall, Aerial                            |
| Ingress Protection   | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68    |
| Size <sup>2</sup>  | 18.7" L x 10.0" W x 10.3" H (475 x 254 x 262 mm)                       |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>2</sup> Outermost part of the assembly; includes the hardened adapters

### COYOTE Dual Chamber Terminal Kit Contents

| Catalog Number | Description  | Cover 1    |                  |               | Cover 2    |                  |               |
|----------------|--|------------|------------------|---------------|------------|------------------|---------------|
|                |  | Cover Type | Adapter Quantity | Plug Quantity | Cover Type | Adapter Quantity | Plug Quantity |
| 80061029       | COYOTE Dual Chamber Terminal Closure Includes – 6 OptiTap® Adapters                | 6-Port     | 6                | 0             | Standard   | N/A              |               |
| 800011830      | COYOTE Dual Chamber Terminal Closure Includes – 12 OptiTap Adapters                | 6-Port     | 6                | 0             | 6-Port     | 6                | 0             |
| 8006991        | COYOTE Dual Chamber Terminal Closure Includes – 8 OptiTap Adapters                 | 9-Port     | 8                | 1             | Standard   | N/A              |               |
| 800012140      | COYOTE Dual Chamber Terminal Closure Includes – 9 OptiTap Adapters                 | 9-Port     | 9                | 0             | Standard   | N/A              |               |
| 800012605      | COYOTE Dual Chamber Terminal Closure Includes – 24 OptiTap Adapters                | 12-Port    | 12               | 0             | 12-Port    | 12               | 0             |
| 800011839      | COYOTE Dual Chamber Terminal Closure for Direct Splice Applications                | Standard   | N/A              |               | Standard   | N/A              |               |
| 8006956        | COYOTE Dual Chamber Terminal Closure with Internal Bulkhead with 6 SC/APC Adapters | Standard   | N/A              |               | Standard   | N/A              |               |

All kits include (1) Closure Assembly, (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (1) 2-Hole Grommet 0.42" – 0.60" (10.7 – 15.2 mm), (1) 4-Hole Grommet 0.30" – 0.43" (7.6 – 10.9 mm), (1) Splice Tray (Cat. No. 80808945), Pigtails and Cable Restraint Hardware



9-Port COYOTE Dual Chamber Terminal Closure  
Catalog Number: 800012140



24-Port COYOTE Dual Chamber Terminal Closure  
Catalog Number: 800012605



Direct Splice or Cross-Connect COYOTE Dual Chamber Terminal Closure  
Catalog Number: 800011839 or 8006956

## ACCESSORIES AND MOUNTING BRACKETS

### COYOTE Terminal Closure Accessories

| Catalog Number | Description   |
|----------------|---|
| 80809958       | Splice Tray, COYOTE LITE-GRIP® Short, Low Profile, 24 CT., Single Fusion      |
| 80813152       | Splice Tray, COYOTE LITE-GRIP Short, Low Profile, 36 CT., Single Fusion       |
| 80808945       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 40 CT., Single Fusion      |
| LGSTR144       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 144 CT., Mass Fusion       |
| 8003993        | Heat Shrink Splice Protector Kit – Includes (12) 40 mm Mass Fusion            |
| 80808187       | Heat Shrink Splice Protector Kit – Includes (12) 40 mm Single Fusion          |
| 8003509        | Heat Shrink Splice Protector Kit – Includes (12) 60 mm Single Fusion          |
| 80807972       | Hardened Adapter Installation Tool  |
| 8003715        | OptiTap® Adapter Kit – Includes (1) OptiTap Adapter and (1) Installation Tool |
| 8004115        | Bulk Pack of OptiTap Adapters – Includes (10) OptiTap Adapters                |
| 8003724        | Plug Kit – Includes (1) Plug and (1) Installation Tool                        |
| 8004060        | Bulk Pack of Plugs – Includes (10) Plugs                                      |
| COYTRM-2PK-SCA | Pigtail Kit – Includes (2) SC/APC Pigtails                                    |
| COYTRM-3PK-SCA | Pigtail Kit – Includes (3) SC/APC Pigtails                                    |
| COYTRM-4PK-SCA | Pigtail Kit – Includes (4) SC/APC Pigtails                                    |

### COYOTE Terminal Single Chamber Mounting Brackets

| Catalog Number | Description  |
|----------------|--|
| 8003797        | Aerial Mounting Bracket – Strand Applications            |
| 8004179        | Horizontal Aerial Mounting Bracket – Strand Applications |
| 8003864        | Aerial Mounting Bracket – ADSS Applications              |
| 8003703        | Pole/Wall Mounting Bracket                               |
| 8003835        | Universal Mounting Bracket – Handhole Applications       |
| 8003706        | Swing Arm Mounting Bracket                               |

### COYOTE Terminal Dual Chamber Mounting Brackets

| Catalog Number | Description                                   |
|----------------|---|
| 8003705        | Aerial Mounting Bracket – Strand Applications |
| 8003703        | Pole/Wall Mounting Bracket                    |
| 8003706        | Swing Arm Mounting Bracket                    |




Hardened Adapter Installation  
Tool



OptiTap® Adapter



Plug

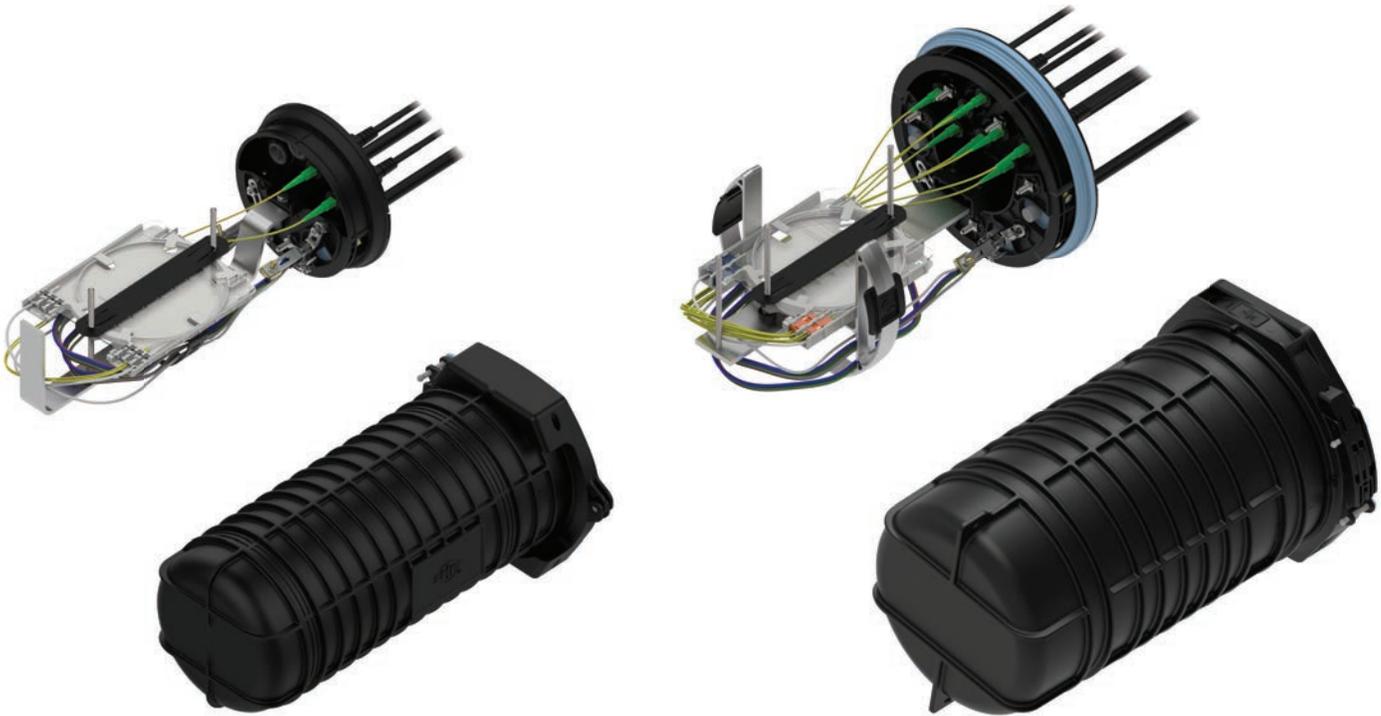

## COYOTE® TERMINAL DOME CLOSURE

### 6.5" AND 9.5"

The **COYOTE Terminal Dome Closure** offers four length options of 17", 22", 19", and 28" to support either buffer tube or ribbon fiber applications. These closures utilize PLP's patented segmented end plate design, which allows for easy installation of a variety of cable sizes in conjunction with the grommets. This segmented end plate design is ideal for supporting rural broadband networks. Each COYOTE Terminal Dome Closure contains externally mounted OptiTap® hardened adapters to support customer drop connections without entering the closure.

### FEATURES AND BENEFITS

- 2 and 4-Port segmented end plate designs provide independent access to each cable port without disrupting surrounding cables
- Up to 4 and 8 OptiTap connections on the 6.5" and 9.5" end plates
- Designed to permit field installation and removal of hardened adapters
- Provided with SC/APC pigtail kits
- Flexible grommet sealing technology supports a wide range of flat and round cable profiles
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirements


## COYOTE® 6.5" X 17" AND 9.5" X 19" TERMINAL DOME CLOSURES

| Specifications  | 6.5" x 17" Terminal Dome Closure                                    |                  | 9.5" x 19" Terminal Dome Closure                                    |                    |
|---|---|------------------|---|--------------------|
|   | Buffer Tube   | Ribbon           | Buffer Tube   | Ribbon             |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945), Ribbon (Deep Profile, LGSTR144) | 144, 216, 120, N/A  | 96, 144, 80, 288 | 288, 432, 240, N/A  | 144, 216, 120, 432 |
| Number of Splice Trays – 80809958, 80813152, 80808945, LGSTR144   | 6, 6, 3, N/A  | 4, 4, 2, 2       | 12, 12, 6, N/A  | 6, 6, 3, 3         |
| Cable Ports <sup>1</sup>  | 2   |                  | 4   |                    |
| Cable Diameters   | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        |                  | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        |                    |
| Ground Studs  | 3   |                  | 7   |                    |
| Configuration   | Butt  |                  | Butt  |                    |
| Application   | Direct Bury, Below Grade, Pole/Wall, Aerial                         |                  | Direct Bury, Below Grade, Pole/Wall, Aerial                         |                    |
| Ingress Protection  | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |                  | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |                    |
| Size <sup>2</sup>   | 8.6" W x 17.9" L (218 x 463 mm)                                     |                  | 13.3" W x 20.4" L (338 x 509 mm)                                    |                    |


<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>2</sup> Outermost part of the assembly; includes the sealing collar.

### ORGANIZER ASSEMBLIES

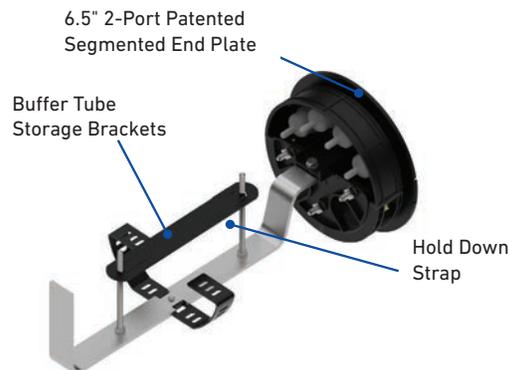

6.5" x 17" Terminal Dome Closure with 4 OptiTap® Adapters  
Catalog Number: COYTD617B4-000

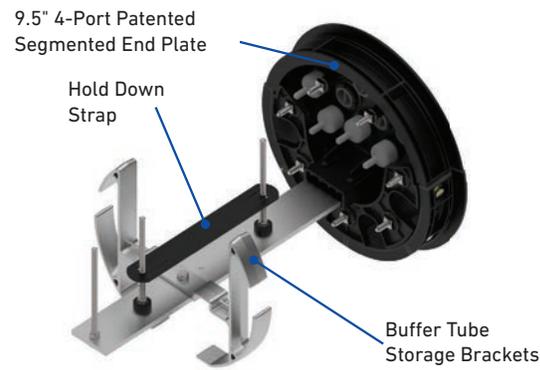

9.5" x 19" Terminal Dome Closure with 4 OptiTap® Adapters  
Catalog Number: COYTD919B4-000

### COYOTE 6.5" x 17" and 9.5" x 19" Terminal Dome Kit Contents

| Catalog Number               | Description  |
|------------------------------|--|
| COYTD617BX <sup>3</sup> -000 | COYOTE 6.5" x 17" Terminal Dome Closure for Buffer Tube – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm) and (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm)   |
| COYTD617RX <sup>3</sup> -000 | COYOTE 6.5" x 17" Terminal Dome Closure for Ribbon – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (1) Transition Tubing Kit, and (2) Transport Tubing Kits |
| COYTD919BX <sup>3</sup> -000 | COYOTE 9.5" x 19" Terminal Dome Closure for Buffer Tube – Includes (2) 2-Hole Grommets 0.42" – 0.60" (10.7 – 15.2 mm) and (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm)   |
| COYTD919RX <sup>3</sup> -000 | COYOTE 9.5" x 19" Terminal Dome Closure for Ribbon – Includes (2) 2-Hole Grommets 0.42" – 0.60" (10.7 – 15.2 mm), (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (1) Transition Tubing Kit, and (2) Transport Tubing Kits |

All kits include (1) COYOTE End Plate Organizer, (1) Dome, (1) Gasket, (1) Collar, (4) Grommets, (1) Splice Tray (Cat. No. 80808945), Pigtailed and Cable Restraint Hardware

<sup>3</sup> Number of adapters as determined by customer.

OptiTap® is a registered trademark of Corning Cable Systems.

Telcordia® is a registered trademark of Telcordia Technologies, Inc., now part of Ericsson.

©2022 Preformed Line Products CO-CA-1004-16





## COYOTE® 6.5" X 22" AND 9.5" X 28" TERMINAL DOME CLOSURE

| Specifications   | 6.5" x 22" Terminal Dome Closure                                    |               | 9.5" x 28" Terminal Dome Closure                                    |               |
|--|---|---------------|---|---------------|
| Catalog Number   | Buffer Tube   | Ribbon        | Buffer Tube   | Ribbon        |
| Splice Capacity (Maximum) – Single Fusion (Standard Profile, 80810086), Single Fusion (Deep Profile, LGSTS72), Ribbon (Deep Profile, LGSTR216) | 144, 216, N/A   | 108, 144, 432 | 324, 432, N/A   | 180, 216, 648 |
| Number of Splice Trays – 80810086, LGSTS72, LGSTR216   | 4, 3, N/A   | 3, 2, 2       | 9, 6, N/A   | 5, 3, 3       |
| Cable Ports <sup>1</sup>   | 2   |               | 4   |               |
| Cable Diameters  | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        |               | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                        |               |
| Ground Studs   | 3   |               | 7   |               |
| Configuration  | Butt  |               | Butt  |               |
| Application  | Direct Bury, Below Grade, Pole/Wall, Aerial                         |               | Direct Bury, Below Grade, Pole/Wall, Aerial                         |               |
| Ingress Protection   | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |               | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68 |               |
| Size <sup>2</sup>  | 8.6" W x 22.6" L (218 x 574 mm)                                     |               | 13.3" W x 29.4" L (338 x 749 mm)                                    |               |

<sup>1</sup>Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>2</sup>Outermost part of the assembly; includes the sealing collar.

### ORGANIZER ASSEMBLIES

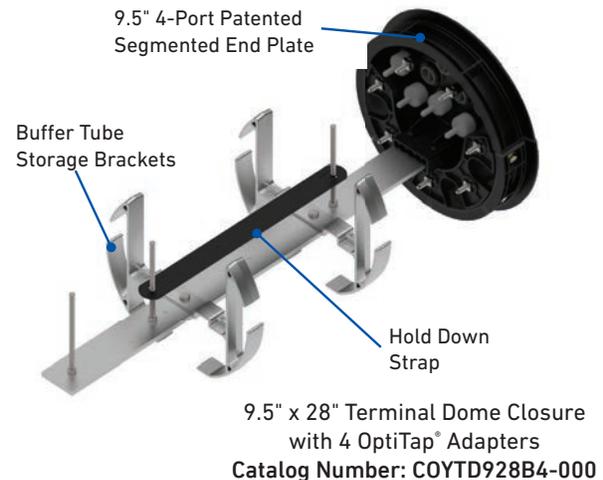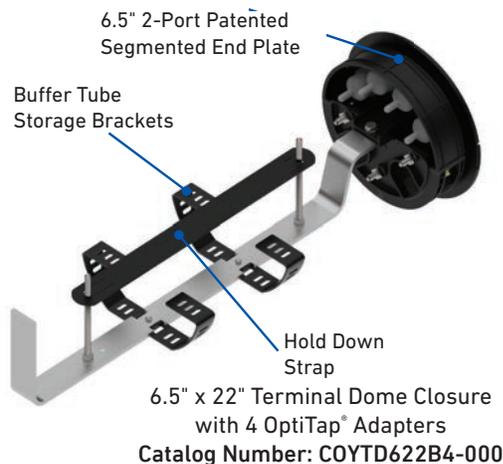

### COYOTE 6.5" x 22" and 9.5" x 28" Terminal Dome Kit Contents

| Catalog Number               | Description  |
|------------------------------|--|
| COYTD622BX <sup>3</sup> -000 | COYOTE 6.5" x 22" Terminal Dome Closure for Buffer Tube – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm) and (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm)   |
| COYTD622RX <sup>3</sup> -000 | COYOTE 6.5" x 22" Terminal Dome Closure for Ribbon – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (1) Transition Tubing Kit, and (2) Transport Tubing Kits |
| COYTD928BX <sup>3</sup> -000 | COYOTE 9.5" x 28" Terminal Dome Closure for Buffer Tube – Includes (2) 2-Hole Grommets 0.42" – 0.60" (10.7 – 15.2 mm) and (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm)   |
| COYTD928RX <sup>3</sup> -000 | COYOTE 9.5" x 28" Terminal Dome Closure for Ribbon – Includes (2) 2-Hole Grommets 0.42" – 0.60" (10.7 – 15.2 mm), (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (1) Transition Tubing Kit, and (2) Transport Tubing Kits |

All kits include (1) COYOTE End Plate Organizer, (1) Dome, (1) Gasket, (1) Collar, (4) Grommets, (1) Splice Tray (Cat. No. LGSTS72), Pigtailed and Cable Restraint Hardware

<sup>3</sup>Number of adapters as determined by customer.

OptiTap® is a registered trademark of Corning Cable Systems.  
Telcordia® is a registered trademark of Telcordia Technologies, Inc., now part of Ericsson.

©2022 Preformed Line Products CO-CA-1004-16

## ORDERING INFORMATION

### COYOTE® Terminal Dome Closure Catalog Number


COYTD XXX X X -000  
 (Section 1) (Section 2) (Section 3)

Catalog Number Example: COYTD617B2-000

| Section 1                 |              | Section 2                      |                       | Section 3                   |                      |
|---------------------------|--------------|--------------------------------|-----------------------|-----------------------------|----------------------|
| Size Selection (Select 1) | Closure Size | Organizer Selection (Select 1) | Organizer Type        | Adapter Quantity (Select 1) | Related Closure Size |
| 617                       | 6.5" x 17"   | B                              | Buffer Tube Organizer | 0, 2, 4                     | 6.5" x 17"           |
| 622                       | 6.5" x 22"   | R                              | Ribbon Organizer      | 0, 2, 4                     | 6.5" x 22"           |
| 919                       | 9.5" x 19"   |                                |                       | 0, 2, 4, 6, 8               | 9.5" x 19"           |
| 928                       | 9.5" x 28"   |                                |                       | 0, 2, 4, 6, 8               | 9.5" x 28"           |

## ADDING OR REPLACING OPTITAP® ADAPTERS

COYOTE Terminal Domes can be ordered with any number of OptiTap adapters and plugs. Additional hardened adapters can be ordered and added as needed. Remove the existing port plug using the installation tool and a can wrench. Add an OptiTap adapter or replace a damaged adapter and retighten with the installation tool.

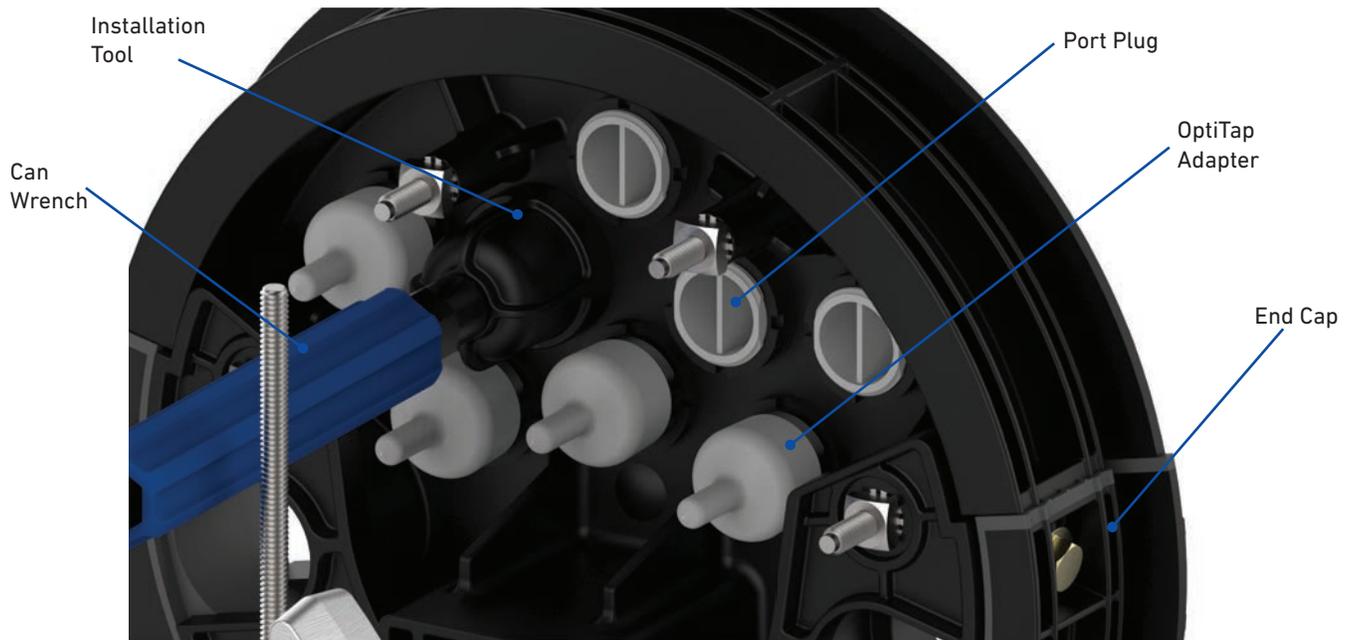



## ACCESSORIES



OptiTap® Adapter

Hardened Adapter  
Installation Tool

Port Plug

## COYOTE® Terminal Dome Closure Accessories

| Catalog Number | Description   |
|----------------|---|
| 80809958       | Splice Tray, COYOTE LITE-GRIP® Short, Low Profile, 24 CT., Single Fusion      |
| 80813152       | Splice Tray, COYOTE LITE-GRIP Short, Low Profile, 36 CT., Single Fusion       |
| 80808945       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 40 CT., Single Fusion      |
| LGSTR144       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 144 CT., Mass Fusion       |
| 80810086       | Splice Tray, COYOTE LITE-GRIP Long, Standard Profile, 36 CT., Single Fusion   |
| LGSTS72        | Splice Tray, COYOTE LITE-GRIP Long, Deep Profile, 72 CT., Single Fusion       |
| LGSTR216       | Splice Tray, COYOTE LITE-GRIP Long, Deep Profile, 216 CT., Mass Fusion        |
| 8003993        | Heat Shrink Splice Protector Kit – Includes (12) 40 mm Mass Fusion            |
| 80808187       | Heat Shrink Splice Protector Kit – Includes (12) 40 mm Single Fusion          |
| 8003509        | Heat Shrink Splice Protector Kit – Includes (12) 60 mm Single Fusion          |
| COYEPFIX1      | End Plate Assembly Fixture for 6.5" and 9.5" Domes                            |
| 80807972       | Hardened Adapter Installation Tool  |
| 8003715        | OptiTap® Adapter Kit – Includes (1) OptiTap Adapter and (1) Installation Tool |
| 8004115        | Bulk Pack of OptiTap Adapters – Includes (10) OptiTap Adapters                |
| 8003724        | Port Plug Kit – Includes (1) Port Plug and (1) Installation Tool              |
| 8004060        | Bulk Pack of Port Plugs – Includes (10) Port Plugs                            |
| 80809205       | Strength Member Bracket Kit – Includes (2) Short L-Brackets                   |
| 80808651       | Strength Member Bracket Kit – Includes (4) Long L-Brackets                    |
| 80808878       | Large Strength Member Adapter Kit   |
| 80811037       | 4-Port Cable Retention Bobbin Kit   |
| 80811036       | 6-Port Drop Cable Retention Bobbin Kit  |
| 80812928       | 6/8-Port Drop Cable Retention Bobbin Kit                                      |
| 80808997       | End Plate Gasket for 6.5" Domes   |
| 80807332       | Latching Collar for 6.5" Domes  |
| 80813717       | End Plate Gasket for 9.5" Terminal Domes                                      |
| 80808528-1     | Latching Collar for 9.5" Domes  |

# MOUNTING BRACKETS

## COYOTE 6.5" Dome Closure Mounting Brackets


| Catalog Number | Description   |
|----------------|---|
| 8003831        | Aerial Mounting Bracket – Strand Applications                   |
| 8004035        | Aerial Adjustable Offset Mounting Bracket – Strand Applications |
| 8003833        | Aerial Mounting Bracket – ADSS Applications                     |
| 8004036        | Aerial Adjustable Offset Mounting Bracket – ADSS Applications   |
| 8003702        | Pole/Wall Mounting Bracket                                      |
| 8003835        | Universal Mounting Bracket Kit for Handhole Applications        |
| 8003707        | Swing Arm for Handhole Applications                             |

## COYOTE 9.5" Dome Closure Mounting Brackets


| Catalog Number | Description   |
|----------------|---|
| 8003940        | Aerial Mounting Bracket – Strand Applications                   |
| 8004037        | Aerial Adjustable Offset Mounting Bracket – Strand Applications |
| 8003869        | Aerial Mounting Bracket – ADSS Applications                     |
| 8004038        | Aerial Adjustable Offset Mounting Bracket – ADSS Applications   |
| 8003942        | Pole/Wall Mounting Bracket                                      |
| 8003835        | Universal Mounting Bracket Kit for Handhole Applications        |
| 8003941        | Aerial Mounting Bracket – End Plate Mounting Applications       |
| 8004003        | Manhole Support   |



6.5" Dome Pole/Wall Mounting Bracket  
 Catalog Number: 8003702

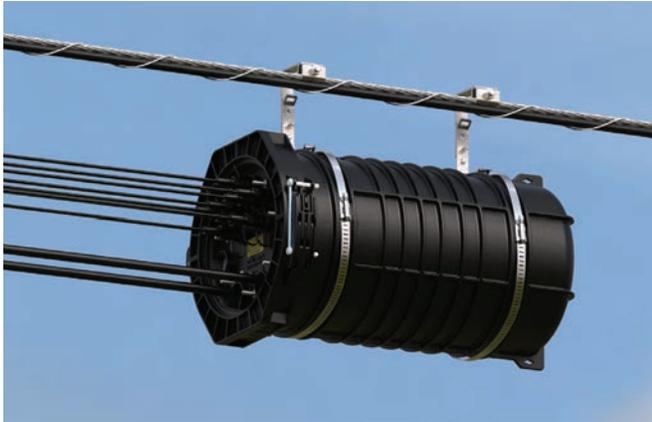

9.5" Aerial Adjustable Offset Mounting  
 Bracket for Strand Applications  
 Catalog Number: 8004037

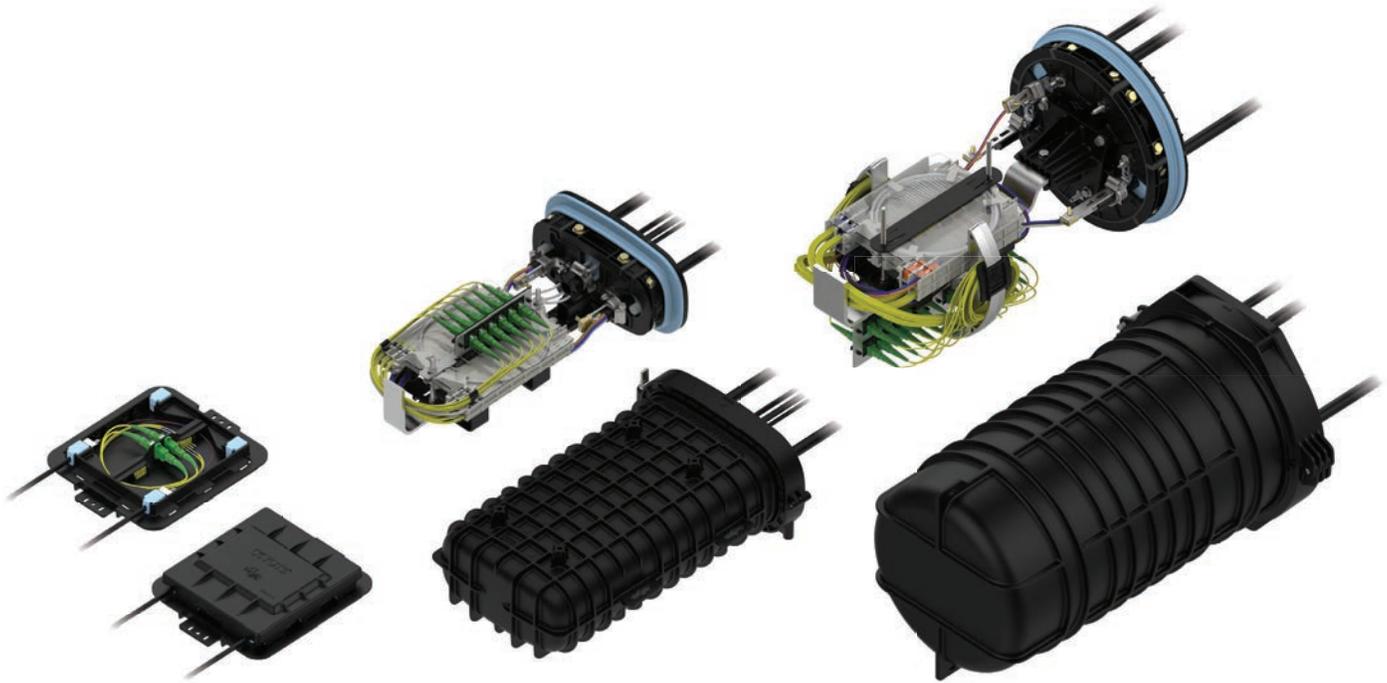

## COYOTE® CROSS-CONNECT CLOSURES

**COYOTE Cross-Connect Closures** merge the craft-friendly functions and features found through out the COYOTE fiber optic closure family with the benefits of plug and play technology. COYOTE Cross-Connect Closures come in a variety of sizes and utilize the same grommet sealing system and COYOTE splice trays used in the traditional COYOTE fiber optic closures. They can be populated with a variety of adapter types and are compatible with bare fiber or pre-connectorized splitters. These closures are ideal for applications where services need to be redirected often without having to re-splice each time.

### FEATURES AND BENEFITS

- Provides protected fiber splicing and connectivity
- Can be quickly assembled and re-entered
- Flexible grommet sealing technology supports a wide range of flat and round cable profiles
- Multiple splice tray designs support single fusion splicing and splitter retention
- Compatible with standard pigtails or pre-connectorized splitters
- Compatible with SC, LC, FC, and ST style of adapters
- Provides 2 to 96 connections depending on the closure size and adapter type

## SPECIFICATIONS

### COYOTE DTC Cross-Connect Closure

|   |           |  |
|---|-----------|--|
| Catalog Number                            |           | 800013911, 800013853   |
| Splice Capacity (Maximum) - Single Fusion |           | 24   |
| Cable Port Quantity                       |           | 4 (2 on each end)  |
| Cable Diameters <sup>1</sup>              |           | 0.17" – 0.37" (4.3 – 9.4 mm) and Flat Drop   |
| Configuration                             |           | In-Line or Butt  |
| Application                               |           | Direct Buried, Below Grade, Pole/Wall, Aerial  |
| Ingress Protection                        |           | In accordance to Telcordia® GR-771-CORE, Buried, Underground, IP-68  |
| Size                                      |           | 9.1" L x 7.6" W x 1.7" D (231 x 193 x 43 mm)   |
| Adapter Port Quantity (Maximum)           |           | 2 SC or 4 LC   |
| Kit Contents                              | 800013911 | Includes (4) 1-Hole Grommet 0.17" – 0.25" (4.3 – 6.4 mm) and Flat Drop Cable, (2) LITE-GRIP® Single Fusion Splice Blocks, (1) LITE-GRIP Mass Fusion Splice Block, (1) Bulkhead Bracket, (2) SC/APC adapters, & (4) 2 mm jacketed pigtails      |
|   | 800013853 | Includes (4) 1-Hole Grommet 0.17" – 0.25" (4.3 – 6.4 mm) and Flat Drop Cable, (2) LITE-GRIP Single Fusion Splice Blocks, (1) LITE-GRIP Mass Fusion Splice Block, and (1) Bulkhead Bracket <b>[NOTE: Adapters and pigtails sold separately]</b> |

<sup>1</sup>This is the maximum range of cable diameters this closure can accept and does not reflect the cable diameter range for the closure kits listed above. Check the grommets provided with each closure kit to determine the acceptable cable diameter range for that closure kit.

### COYOTE LCC Cross-Connect Closure

|   |           |   |
|---|-----------|---|
| Catalog Number                            |           | 800013854   |
| Splice Capacity (Maximum) - Single Fusion |           | 16  |
| Cable Port Quantity                       |           | 2 (1 on each end)   |
| Cable Diameters <sup>1</sup>              |           | 0.093" – 1.00" (2.4 – 25.4 mm) and Flat Drop  |
| Configuration                             |           | In-Line or Butt   |
| Application                               |           | Direct Buried, Below Grade, Pole/Wall, Aerial   |
| Ingress Protection                        |           | In accordance to Telcordia® GR-771-CORE, Buried, Underground, IP-68   |
| Size                                      |           | 14.0" L x 6.5" W x 2.5" D (356 x 165 x 64 mm)   |
| Adapter Port Quantity (Maximum)           |           | 4 SC or 8 LC  |
| Kit Contents                              | 800013854 | Includes (1) 7-Hole Grommet [1 Hole: 0.42" – 0.60" (10.7 – 15.2 mm) and 6 Holes: 0.125" – 0.250" (3.2 – 6.4 mm) and Flat Drop Cable], (1) 8-Hole Grommet 0.125" – 0.250" (3.2 – 6.4 mm) and Flat Drop Cable, (1) Splice Platform, (3) LITE-GRIP Single Fusion Splice Blocks, (1) Dual Strength Member Bracket, (1) "L" Strength Member Bracket, and (1) Bulkhead Bracket <b>[NOTE: Adapters and pigtails sold separately]</b> |

<sup>1</sup>This is the maximum range of cable diameters this closure can accept and does not reflect the cable diameter range for the closure kits listed above. Check the grommets provided with each closure kit to determine the acceptable cable diameter range for that closure kit.





## SPECIFICATIONS

### COYOTE In-Line RUNT Cross-Connect Closure



|  |          |   |
|--|----------|---|
| <b>Catalog Number</b>  |          | <b>80061172, 80061173</b>   |
| Splice Capacity (Maximum) - Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152) |          | 48, 72  |
| Number of Splice Trays – 80809958, 80813152  |          | 2, 2  |
| Cable Port Quantity  |          | 4 (2 on each end)   |
| Cable Diameters <sup>1</sup>   |          | 0.093" – 1.20" (2.4 – 30.5 mm) and Flat Drop  |
| Configuration  |          | In-Line or Butt   |
| Application  |          | Direct Buried, Below Grade, Pole/Wall, Aerial   |
| Ingress Protection   |          | In accordance to Telcordia® GR-771-CORE, Buried, Underground; IP-68   |
| Size   |          | 18.7" L x 10.0" W x 3.7" H (475 x 254 x 94 mm)  |
| Adapter Port Quantity (Maximum)  |          | 8 SC or 16 LC   |
| Kit Contents   | 80061172 | Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (1) 2-Hole Grommet 0.42" – 0.60" (10.7 – 15.2 mm), and (1) 4-Hole Grommet 0.30" – 0.43" (7.6 – 10.9 mm), (1) Splice Tray - Cat. No.80809958, (1) 6 Position Bulkhead Bracket, (6) SC/APC adapters, and (12) 2 mm jacketed pigtails   |
|  | 80061173 | Includes: (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (1) 2-Hole Grommet 0.42" – 0.60" (10.7 – 15.2 mm), and (1) 4-Hole Grommet 0.30" – 0.43" (7.6 – 10.9 mm), (1) Splice Tray - Cat. No. 80809958, (1) 8 Position Bulkhead Bracket, (8) SC/APC adapters, and (16) 2 mm jacketed pigtails |

<sup>1</sup>This is the maximum range of cable diameters this closure can accept and does not reflect the cable diameter range for the closure kits listed above. Check the grommets provided with each closure kit to determine the acceptable cable diameter range for that closure kit.

### COYOTE Dual Chamber Terminal Cross-Connect Closure



|  |         |   |
|--|---------|---|
| <b>Catalog Number</b>  |         | <b>8006956</b>  |
| Splice Capacity (Maximum) - Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945) |         | 96, 144, 80   |
| Number of Splice Trays – 80809958, 80813152, 80808945  |         | 4, 4, 2   |
| Cable Port Quantity  |         | 6 (4 on each end, 2 on opposite end)  |
| Cable Diameters <sup>1</sup>   |         | 0.093" – 1.20" (2.4 – 30.5 mm) and Flat Drop  |
| Configuration  |         | In-Line or Butt   |
| Application  |         | Direct Buried, Below Grade, Pole/Wall, Aerial   |
| Ingress Protection   |         | In accordance to Telcordia® GR-771-CORE, Buried, Underground, IP-68   |
| Size   |         | 18.7" L x 10.0" W x 7.0" H (475 x 254 x 178 mm)   |
| Adapter Port Quantity (Maximum)  |         | 8 SC or 16 LC   |
| Kit Contents   | 8006956 | Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (1) 2-Hole Grommet 0.42" – 0.60" (10.7 – 15.2 mm), and (1) 4-Hole Grommet 0.30" – 0.43" (7.6 – 10.9 mm), (1) Splice Tray - Cat. No. 80807701, (1) Shroud Kit, (1) 6 Position SC/APC Adapter Module, and (6) 2 mm jacketed pigtails |

<sup>1</sup>This is the maximum range of cable diameters this closure can accept and does not reflect the cable diameter range for the closure kits listed above. Check the grommets provided with each closure kit to determine the acceptable cable diameter range for that closure kit.

Telcordia® is a registered trademark of Telcordia Technologies, Inc., now part of Ericsson.

©2022 Preformed Line Products CO-CA-1004-16

## SPECIFICATIONS



### COYOTE ONE Dome Cross-Connect Closure

|  |           |   |
|--|-----------|---|
| Catalog Number   |           | 800013856   |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152) |           | 48, 72  |
| Number of Splice Trays – 80809958, 80813152  |           | 2, 2  |
| Cable Port Quantity  |           | 3   |
| Cable Diameters <sup>1</sup>   |           | 0.093" – 0.85" (2.4 – 21.6 mm) and Flat Drop  |
| Configuration  |           | Butt  |
| Application  |           | Direct Buried, Below Grade, Pole/Wall, Aerial   |
| Ingress Protection   |           | In accordance to Telcordia® GR-771-CORE, Buried, Underground, IP-68   |
| Size   |           | 16.0" L x 10.8" W x 5.7" H (406 x 274 x 145 mm)   |
| Adapter Port Quantity (Maximum)  |           | 12 SC or 16 LC  |
| Kit Contents   | 800013856 | Includes (2) 2-Hole Grommet 0.42" – 0.60" (10.7 – 15.2 mm), (1) 6-Hole Grommet 0.125" – 0.250" (3.2 – 6.4 mm) and Flat Drop Cable, and (1) Bulkhead Bracket <b>[NOTE: Adapter modules and pigtails sold separately]</b> |

<sup>1</sup>This is the maximum range of cable diameters this closure can accept and does not reflect the cable diameter range for the closure kits listed above. Check the grommets provided with each closure kit to determine the acceptable cable diameter range for that closure kit.



### COYOTE 6.5" x 17" Dome Cross-Connect Closure

|  |             |  |
|--|-------------|--|
| Catalog Number   |             | CXD617B-001  |
| Splice Capacity (Maximum) - Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945) |             | 96, 144, 80  |
| Number of Splice Trays – 80809958, 80813152, 80808945  |             | 4, 4, 2  |
| Cable Port Quantity  |             | 4  |
| Cable Diameters <sup>1</sup>   |             | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop   |
| Configuration  |             | Butt   |
| Cable Types  |             | Buffer Tube Only   |
| Application  |             | Direct Buried, Below Grade, Pole/Wall, Aerial  |
| Ingress Protection   |             | In accordance to Telcordia® GR-771-CORE, Buried, Underground, IP-68  |
| Size   |             | 8.6" W x 17.9" L (218 x 464 mm)  |
| Adapter Port Quantity (Maximum)  |             | 24 SC or 48 LC   |
| Kit Contents   | CXD617B-001 | Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), and (1) 16 Position Bulkhead Bracket <b>[NOTE: Adapters and pigtails sold separately]</b> |

<sup>1</sup>This is the maximum range of cable diameters this closure can accept and does not reflect the cable diameter range for the closure kits listed above. Check the grommets provided with each closure kit to determine the acceptable cable diameter range for that closure kit.



## SPECIFICATIONS

### COYOTE 6.5" x 17" Dome Cross-Connect Closure



|  |             |  |
|--|-------------|--|
| Catalog Number   |             | CXD617U-001  |
| Splice Capacity (Maximum) - Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945) |             | 96, 144, 80  |
| Number of Splice Trays – 80809958, 80813152, 80808945  |             | 4, 4, 2  |
| Cable Port Quantity  |             | 4  |
| Cable Diameters <sup>1</sup>   |             | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop   |
| Configuration  |             | Butt   |
| Cable Types  |             | Buffer Tube or Ribbon  |
| Application  |             | Direct Buried, Below Grade, Pole/Wall, Aerial  |
| Ingress Protection   |             | In accordance to Telcordia® GR-771-CORE, Buried, Underground, IP-68  |
| Size   |             | 8.6" W x 17.9" L (218 x 464 mm)  |
| Adapter Port Quantity (Maximum)  |             | 24 SC or 48 LC   |
| Kit Contents   | CXD617U-001 | Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (1) Transition Tubing Kit, (2) Transport Tubing Kits, and (1) 16 Position Bulkhead Bracket <b>[NOTE: Adapters and pigtails sold separately]</b> |

<sup>1</sup>This is the maximum range of cable diameters this closure can accept and does not reflect the cable diameter range for the closure kits listed above. Check the grommets provided with each closure kit to determine the acceptable cable diameter range for that closure kit.

### COYOTE 6.5" x 22" Dome Cross-Connect Closure



|   |             |  |
|---|-------------|--|
| Catalog Number  |             | CXD622B-001  |
| Splice Capacity (Maximum) - Single Fusion (Standard Profile, 80810086), Single Fusion (Deep Profile, LGSTS72) |             | 108, 144   |
| Number of Splice Trays – 80810086, LGSTS72  |             | 3, 2   |
| Cable Port Quantity   |             | 4  |
| Cable Diameters <sup>1</sup>  |             | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop   |
| Configuration   |             | Butt   |
| Cable Types   |             | Buffer Tube Only   |
| Application   |             | Direct Buried, Below Grade, Pole/Wall, Aerial  |
| Ingress Protection  |             | In accordance to Telcordia® GR-771-CORE, Buried, Underground, IP-68  |
| Size  |             | 8.6" W x 22.6" L (218 x 574 mm)  |
| Adapter Port Quantity (Maximum)   |             | 48 SC or 96 LC   |
| Kit Contents  | CXD622B-001 | Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), and (1) 32 Position Bulkhead Bracket <b>[NOTE: Adapters and pigtails sold separately]</b> |

<sup>1</sup>This is the maximum range of cable diameters this closure can accept and does not reflect the cable diameter range for the closure kits listed above. Check the grommets provided with each closure kit to determine the acceptable cable diameter range for that closure kit.

## SPECIFICATIONS



### COYOTE 6.5" x 22" Dome Cross-Connect Closure

|   |              |   |
|---|--------------|---|
| Catalog Number  |              | CXD622U-001   |
| Splice Capacity (Maximum) - Single Fusion (Standard Profile, 80810086), Single Fusion (Deep Profile, LGSTS72) |              | 108, 144  |
| Number of Splice Trays – 80810086, LGSTS72  |              | 3, 2  |
| Cable Port Quantity   |              | 4   |
| Cable Diameters <sup>1</sup>  |              | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop  |
| Configuration   |              | Butt  |
| Cable Types   |              | Buffer Tube or Ribbon   |
| Application   |              | Direct Buried, Below Grade, Pole/Wall, Aerial   |
| Ingress Protection  |              | In accordance to Telcordia® GR-771-CORE, Buried, Underground, IP-68   |
| Size  |              | 8.6" W x 22.6" L (218 x 574 mm)   |
| Adapter Port Quantity (Maximum)   |              | 48 SC or 96 LC  |
| Kit Contents  | CX-D622U-001 | Includes: (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (1) Transition Tubing Kit, (2) Transport Tubing Kits, and (1) 32 Position Bulkhead Bracket <b>[NOTE: Adapters and pigtails sold separately]</b> |

<sup>1</sup>This is the maximum range of cable diameters this closure can accept and does not reflect the cable diameter range for the closure kits listed above. Check the grommets provided with each closure kit to determine the acceptable cable diameter range for that closure kit.

### COYOTE 9.5" x 19" Dome Cross-Connect Closure



|  |          |  |
|--|----------|--|
| Catalog Number   |          | CXD91901   |
| Splice Capacity (Maximum) - Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945) |          | 240, 360, 200  |
| Number of Splice Trays – 80809958, 80813152, 80808945  |          | 10, 10, 5  |
| Cable Port Quantity  |          | 7  |
| Cable Diameters <sup>1</sup>   |          | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop   |
| Configuration  |          | Butt   |
| Application  |          | Direct Buried, Below Grade, Pole/Wall, Aerial  |
| Ingress Protection   |          | In accordance to Telcordia® GR-771-CORE, Buried, Underground, IP-68  |
| Size   |          | 13.3" W x 20.4" L (338 x 509 mm)   |
| Adapter Port Quantity (Maximum)  |          | 48 SC or 96 LC   |
| Kit Contents   | CXD91901 | Includes: (2) 2-Hole Grommet 0.42" – 0.60" (10.7 – 15.2 mm) and (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm) <b>[NOTE: Adapter modules and pigtails sold separately]</b> |

<sup>1</sup>This is the maximum range of cable diameters this closure can accept and does not reflect the cable diameter range for the closure kits listed above. Check the grommets provided with each closure kit to determine the acceptable cable diameter range for that closure kit.



## COYOTE® GLC


### 9.5" X 17" AND 9.5" X 28"

The **COYOTE GLC (Ground Level Closure)** offers two length options of 17" and 28" to support either buffer tube or ribbon fiber applications. These closures utilize PLP's patented segmented end plate design, which allows for easy installation of a variety of cable sizes in conjunction with our grommets. The GLC is a hermetically sealed pedestal system that permits a high volume of uncut slack storage and its unique design doesn't force you to work where the closure is installed.

### FEATURES AND BENEFITS

- 4-Port segmented end plate design provides independent access to each cable port without disrupting surrounding cables
- Multiple tray designs support mass fusion splicing, single fusion splicing, or a combination of both
- Flexible grommet sealing technology supports a wide range of flat and round cable profiles
- Hermetically sealed dome eliminates potential for water intrusion and prevents invasion of insects
- Accessible isolated grounding system that allows ground testing to occur without entering the splice closure
- Slack storage of uncut cable allows dome closure to be carried to a splice truck or other suitable working environment
- The small GLC base with cover can be used for pedestrian applications (Tier 5), while the large base with cover can be used for sidewalk or light duty truck applications (Tier 8).

## SPECIFICATIONS

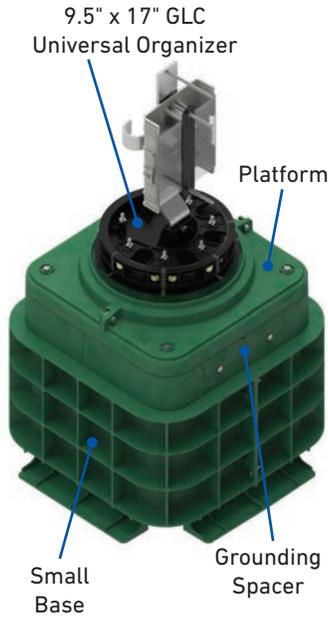

### COYOTE 9.5" x 17" GLC with Universal Organizer

|  |                |  |
|--|----------------|--|
| Catalog Numbers  |                | COYGLC-F1-000, COYGLC-F1B-000, COYGLC-F1B-100                              |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945), Mass Fusion (Deep Profile, LGSTR144) |                | 96, 144, 80, 288   |
| Number of Splice Trays – 80809958, 80813152, 80808945, LGSTR144  |                | 4, 4, 2, 2   |
| Cable Ports <sup>1</sup>   |                | 4  |
| Cable Diameters  | Small Base     | 0.093" – 0.60" (2.4 – 15.2 mm) and Flat Drop                               |
|  | Large Base     | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                               |
| Ground Studs   |                | 4  |
| Configuration  |                | Butt   |
| Cable Types  |                | Buffer Tube or Ribbon  |
| Application  |                | Pedestal   |
| Ingress Protection   |                | In accordance to Telcordia® GR-771-CORE, Pedestal; IP-68                   |
| Size <sup>2</sup>  |                | 15.4" L x 15.4" W x 20.4" H (390 x 390 x 520 mm)                           |
| Kit Contents <sup>3</sup>  | COYGLC-F1-000  | Includes (1) Standard Platform   |
|  | COYGLC-F1B-000 | Includes (1) Standard Platform and (1) Small Base                          |
|  | COYGLC-F1B-100 | Includes (1) Standard Platform, (1) Small Base, & (1) Grounding Spacer Kit |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port

<sup>2</sup> Includes platform, collar, and dome assembly only. See COYOTE GLC Bases for base sizes

<sup>3</sup> All kits include (1) Green GLC Dome, (1) COYOTE 9.5" End Plate with Organizer, (1) Gasket, (1) Collar, (2) 2-Hole Grommets, (1) 4-Hole Grommet, (1) 6-Hole Grommet, (1) Splice Tray (Catalog Number: 80808945) and Cable Restraint Hardware.

### COYOTE 9.5" x 17" GLC with Maximum Tray & Storage Organizer




|  |                |  |
|--|----------------|--|
| Catalog Numbers  |                | COYGLC-F2-000, COYGLC-F2B-000, COYGLC-F2B-100                              |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945), Mass Fusion (Deep Profile, LGSTR144) |                | 312, 468, 240, N/A   |
| Number of Splice Trays – 80809958, 80813152, 80808945, LGSTR144  |                | 13, 13, 6, N/A   |
| Cable Ports <sup>1</sup>   |                | 4  |
| Cable Diameters  | Small Base     | 0.093" – 0.60" (2.4 – 15.2 mm) and Flat Drop                               |
|  | Large Base     | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                               |
| Ground Studs   |                | 4  |
| Configuration  |                | Butt   |
| Cable Types  |                | Buffer Tube Only   |
| Application  |                | Pedestal   |
| Ingress Protection   |                | In accordance to Telcordia® GR-771-CORE, Pedestal; IP-68                   |
| Size <sup>2</sup>  |                | 15.4" L x 15.4" W x 20.4" H (390 x 390 x 520 mm)                           |
| Kit Contents <sup>3</sup>  | COYGLC-F2-000  | Includes (1) Standard Platform   |
|  | COYGLC-F2B-000 | Includes (1) Standard Platform and (1) Small Base                          |
|  | COYGLC-F2B-100 | Includes (1) Standard Platform, (1) Small Base, & (1) Grounding Spacer Kit |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port

<sup>2</sup> Includes platform, collar, and dome assembly only. See COYOTE GLC Bases for base sizes

<sup>3</sup> All kits include (1) Green GLC Dome, (1) COYOTE 9.5" End Plate with Organizer, (1) Gasket, (1) Collar, (2) 2-Hole Grommets, (1) 4-Hole Grommet, (1) 6-Hole Grommet, (1) Splice Tray (Catalog Number: 80808945) and Cable Restraint Hardware.

## SPECIFICATIONS

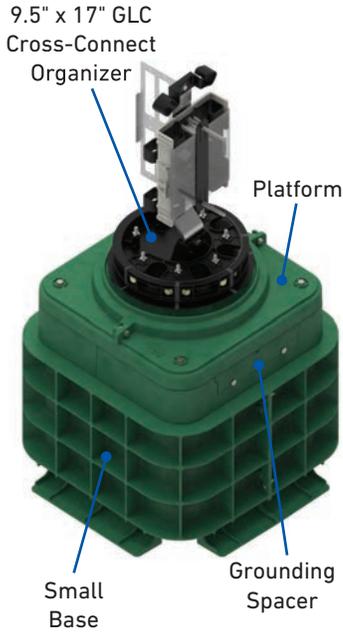


### COYOTE 9.5" x 17" GLC with Cross-Connect Organizer

|  |                |  |
|--|----------------|--|
| <b>Catalog Number</b>  |                | COYGLC-F3-000, COYGLC-F3B-000, COYGLC-F3B-100                              |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945), Mass Fusion (Deep Profile, LGSTR144) |                | 96, 144, 80, 288   |
| Number of Splice Trays – 80809958, 80813152, 80808945, LGSTR144  |                | 4, 4, 2, 2   |
| Cable Ports <sup>1</sup>   |                | 4  |
| Cable Diameters  | Small Base     | 0.093" – 0.60" (2.4 – 15.2 mm) and Flat Drop                               |
|  | Large Base     | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                               |
| Ground Studs   |                | 4  |
| Configuration  |                | Butt   |
| Cable Types  |                | Buffer Tube or Ribbon  |
| Application  |                | Pedestal   |
| Ingress Protection   |                | In accordance to Telcordia® GR-771-CORE, Pedestal; IP-68                   |
| Size <sup>2</sup>  |                | 15.4" L x 15.4" W x 20.4" H (390 x 390 x 520 mm)                           |
| Adapter Port Quantity (Maximum)  |                | 48 SC or 96 LC   |
| Kit Contents <sup>3</sup>  | COYGLC-F3-000  | Includes (1) Standard Platform   |
|  | COYGLC-F3B-000 | Includes (1) Standard Platform and (1) Small Base                          |
|  | COYGLC-F3B-100 | Includes (1) Standard Platform, (1) Small Base, & (1) Grounding Spacer Kit |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port

<sup>2</sup> Includes platform, collar, and dome assembly only. See COYOTE GLC Bases for base sizes

<sup>3</sup> All kits include (1) Green GLC Dome, (1) COYOTE 9.5" End Plate with Organizer, (1) Gasket, (1) Collar, (2) 2-Hole Grommets, (1) 4-Hole Grommet, (1) 6-Hole Grommet, (1) Splice Tray (Catalog Number: 80808945) and Cable Restraint Hardware. Additional selections of adapter and pigtail accessories are required.

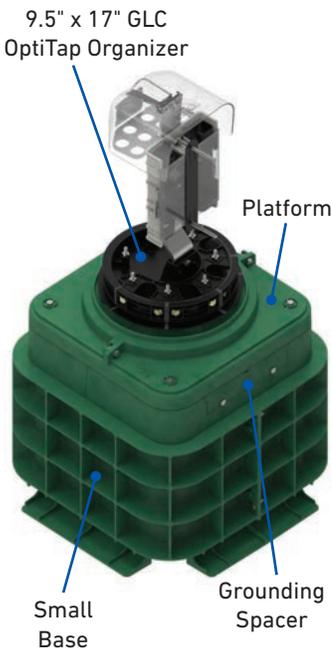

### COYOTE 9.5" x 17" GLC with OptiTap® Organizer


|  |                |  |
|--|----------------|--|
| <b>Catalog Number</b>  |                | COYGLC-F4-000, COYGLC-F4B-000, COYGLC-F4B-100                              |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945), Mass Fusion (Deep Profile, LGSTR144) |                | 96, 144, 80, 288   |
| Number of Splice Trays – 80809958, 80813152, 80808945, LGSTR144  |                | 4, 4, 2, 2   |
| Cable Ports <sup>1</sup>   |                | 4  |
| Cable Diameters  | Small Base     | 0.093" – 0.60" (2.4 – 15.2 mm) and Flat Drop                               |
|  | Large Base     | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                               |
| Ground Studs   |                | 4  |
| Configuration  |                | Butt   |
| Cable Types  |                | Buffer Tube or Ribbon and Pre-Connectorized Hardened Drop                  |
| Application  |                | Pedestal   |
| Ingress Protection   |                | In accordance to Telcordia® GR-771-CORE, Pedestal; IP-68                   |
| Size <sup>2</sup>  |                | 15.4" L x 15.4" W x 20.4" H (390 x 390 x 520 mm)                           |
| Kit Contents <sup>3</sup>  | COYGLC-F4-000  | Includes (1) Standard Platform   |
|  | COYGLC-F4B-000 | Includes (1) Standard Platform and (1) Small Base                          |
|  | COYGLC-F4B-100 | Includes (1) Standard Platform, (1) Small Base, & (1) Grounding Spacer Kit |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port

<sup>2</sup> Includes platform, collar, and dome assembly only. See COYOTE GLC Bases for base sizes

<sup>3</sup> All kits include (1) Green GLC Dome, (1) COYOTE 9.5" End Plate with Organizer, (1) Gasket, (1) Collar, (2) 2-Hole Grommets, (1) 4-Hole Grommet, (1) 6-Hole Grommet, (1) Splice Tray (Catalog Number: 80808945) and Cable Restraint Hardware. Additional selection of OptiTap® adapters are required.

## SPECIFICATIONS

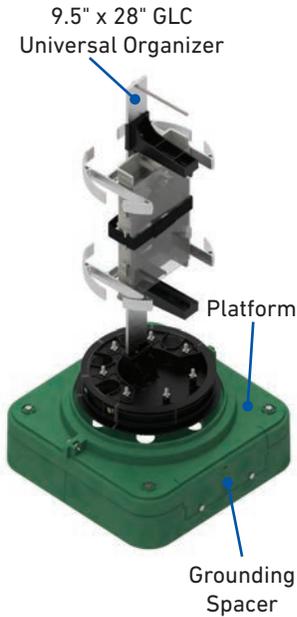


### COYOTE 9.5" x 28" GLC with Universal Organizer

|   |               |  |
|---|---------------|--|
| <b>Catalog Number</b>   |               | COYGLC-F5-000, COYGLC-F5-100                                   |
| Splice Capacity (Maximum) – Single Fusion (Standard Profile, 80810086), Single Fusion (Deep Profile, LGSTS72), Mass Fusion (Deep Profile, LGSTR216) |               | 180, 288, 864  |
| Number of Splice Trays – 80810086, LGSTS72, LGSTR216  |               | 5, 4, 4  |
| Cable Ports <sup>1</sup>  |               | 4  |
| Cable Diameters   | Small Base    | 0.093" – 0.60" (2.4 – 15.2 mm) and Flat Drop                   |
|   | Large Base    | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                   |
| Ground Studs  |               | 4  |
| Configuration   |               | Butt   |
| Cable Types   |               | Buffer Tube or Ribbon  |
| Application   |               | Pedestal   |
| Ingress Protection  |               | In accordance to Telcordia® GR-771-CORE, Pedestal; IP-68       |
| Size <sup>2</sup>   |               | 15.4" L x 15.4" W x 31.6" H (390 x 390 x 800 mm)               |
| Kit   | COYGLC-F5-000 | Includes (1) Standard Platform                                 |
| Contents <sup>3</sup>   | COYGLC-F5-100 | Includes (1) Platform with Cutout and (1) Grounding Spacer Kit |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port

<sup>2</sup> Includes platform, collar, and dome assembly only. See COYOTE GLC Bases for base sizes

<sup>3</sup> All kits include (1) Green GLC Dome, (1) COYOTE 9.5" End Plate with Organizer, (1) Gasket, (1) Collar, (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (1) 2-Hole Grommet, (1) 7-Hole Grommet, (1) Splice Tray (Catalog Number: LGSTS72) and Cable Restraint Hardware.

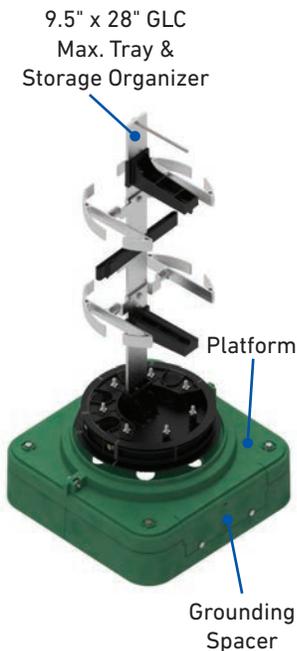

### COYOTE 9.5" x 28" GLC with Max. Tray & Storage Organizer

|   |               |  |
|---|---------------|--|
| <b>Catalog Number</b>   |               | COYGLC-F6-000, COYGLC-F6-100                                   |
| Splice Capacity (Maximum) – Single Fusion (Standard Profile, 80810086), Single Fusion (Deep Profile, LGSTS72), Mass Fusion (Deep Profile, LGSTR216) |               | 324, 432, N/A  |
| Number of Splice Trays – 80810086, LGSTS72, LGSTR216  |               | 9, 6, N/A  |
| Cable Ports <sup>1</sup>  |               | 4  |
| Cable Diameters   | Small Base    | 0.093" – 0.60" (2.4 – 15.2 mm) and Flat Drop                   |
|   | Large Base    | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                   |
| Ground Studs  |               | 4  |
| Configuration   |               | Butt   |
| Cable Types   |               | Buffer Tube Only   |
| Application   |               | Pedestal   |
| Ingress Protection  |               | In accordance to Telcordia® GR-771-CORE, Pedestal; IP-68       |
| Size <sup>2</sup>   |               | 15.4" L x 15.4" W x 31.6" H (390 x 390 x 800 mm)               |
| Kit   | COYGLC-F6-000 | Includes (1) Standard Platform                                 |
| Contents <sup>3</sup>   | COYGLC-F6-100 | Includes (1) Platform with Cutout and (1) Grounding Spacer Kit |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port


<sup>2</sup> Includes platform, collar, and dome assembly only. See COYOTE GLC Bases for base sizes

<sup>3</sup> All kits include (1) Green GLC Dome, (1) COYOTE 9.5" End Plate with Organizer, (1) Gasket, (1) Collar, (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (1) 2-Hole Grommet, (1) 7-Hole Grommet, (1) Splice Tray (Catalog Number: LGSTS72) and Cable Restraint Hardware.



## SPECIFICATIONS

9.5" x 28" GLC Cross-Connect Organizer

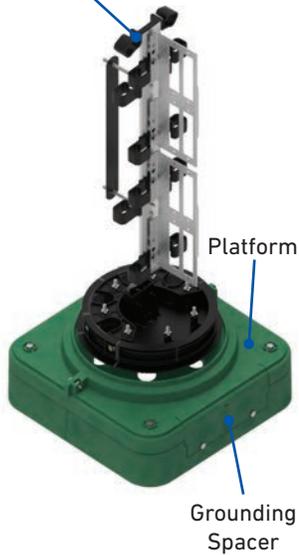

### COYOTE 9.5" x 28" GLC with Cross-Connect Organizer

|   |               |  |
|---|---------------|--|
| Catalog Numbers   |               | COYGLC-F7-000, COYGLC-F7-100                                   |
| Splice Capacity (Maximum) – Single Fusion (Standard Profile, 80810086), Single Fusion (Deep Profile, LGSTS72), Mass Fusion (Deep Profile, LGSTR216) |               | 180, 288, N/A  |
| Number of Splice Trays – 80810086, LGSTS72, LGSTR216  |               | 5, 4, N/A  |
| Cable Ports <sup>1</sup>  |               | 4  |
| Cable Diameters   | Small Base    | 0.093" – 0.60" (2.4 – 15.2 mm) and Flat Drop                   |
|   | Large Base    | 0.093" – 1.25" (2.4 – 31.8 mm) and Flat Drop                   |
| Ground Studs  |               | 4  |
| Configuration   |               | Butt   |
| Cable Types   |               | Buffer Tube or Ribbon  |
| Application   |               | Pedestal   |
| Ingress Protection  |               | In accordance to Telcordia® GR-771-CORE, Pedestal; IP-68       |
| Size <sup>2</sup>   |               | 15.4" L x 15.4" W x 31.6" H (390 x 390 x 800 mm)               |
| Adapter Port Quantity (Maximum)   |               | 96 SC or 196 LC  |
| Kit Contents <sup>3</sup>   | COYGLC-F7-000 | Includes (1) Standard Platform                                 |
|   | COYGLC-F7-100 | Includes (1) Platform with Cutout and (1) Grounding Spacer Kit |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port

<sup>2</sup> Includes platform, collar, and dome assembly only. See COYOTE GLC Bases for base sizes

<sup>3</sup> All kits include (1) Green GLC Dome, (1) COYOTE 9.5" End Plate with Organizer, (1) Gasket, (1) Collar, (2) 1-Hole Grommets 0.60" – 0.85" (15.2 – 21.6 mm), (1) 2-Hole Grommet, (1) 7-Hole Grommet, (1) Splice Tray (**Catalog Number LGSTS72**) and Cable Restraint Hardware. Additional selections of adapter and pigtail accessories are required.

## COYOTE GLC BASES



COYOTE GLC Small Base  
17" W x 17" L x 13" H (430 x 430 x 330 mm)  
For Fiber Optic Cables with Diameters  
up to 0.60" (15.2 mm)  
Catalog Number: COYGLC-B-000



COYOTE GLC Large Base with Cover & Plug  
24" W x 36" L x 24" H (610 x 910 x 610 mm)  
For Fiber Optic Cables with Diameters  
up to 1.25" (31.8 mm)  
Catalog Number: COYGLC-C4-000



COYOTE GLC Large Base with Cover & No Plug  
24" W x 36" L x 24" H (610 x 910 x 610 mm)  
For Fiber Optic Cables with Diameters  
up to 1.25" (31.8 mm)  
Catalog Number: COYGLC-C4-001

## COYOTE® GLC BASE COVERS



COYOTE GLC Small Base Cover  
**NOTE:** Can not be used as a plug for the large base cover  
**Catalog Number: 80809781**



COYOTE GLC Large Base Cover with Plug  
**Catalog Number: COYGLC-C4-002**



COYOTE GLC Large Base Cover without Plug  
**Catalog Number: COYGLC-C4-003**

## COYOTE® GLC SPACERS



**Standard Spacer**  
 Raises the base height by 3" for adjustment to ground level



**Grounding Spacer**  
 Raises the base height by 3" for adjustment to ground level. Provides 7 external isolated ground connections



**Dual Grounding Spacer**  
 Raises the base height by 3" for adjustment to ground level. Provides 14 external isolated ground connections


### COYOTE GLC Spacers for Small Base

| Catalog Number | Description  |
|----------------|--|
| COYGLC-S1-000  | COYOTE GLC Standard Spacer for Small Base – Includes (2) Standard Spacer Halves, (2) Self-Tapping Bolts, and (4) 3.49" L (89 mm) Spacer Fasteners  |
| COYGLC-S2-000  | COYOTE GLC Grounding Spacer for Small Base – Includes (1) Standard Spacer Half, (1) Grounding Spacer Half, (1) Ground Stud Mounting Plate, (7) Ground Studs with Fasteners, (1) Bonding Plate, (1) Standard Access Cover, (7) Ground Lead Assemblies, (2) Self-Tapping Bolts, and (4) 3.49" L (89 mm) Spacer Fasteners |
| COYGLC-S3-000  | COYOTE GLC Dual Grounding Spacer for Small Base – Includes (2) Grounding Spacer Halves, (2) Ground Stud Mounting Plate, (14) Ground Studs with Fasteners, (2) Bonding Plate, (2) Standard Access Cover, (14) Ground Lead Assemblies, (2) Self-Tapping Bolts, and (4) 3.49" L (89 mm) Spacer Fasteners                  |

### COYOTE GLC Spacers for Large Base

| Catalog Number | Description   |
|----------------|---|
| COYGLC-S4-000  | COYOTE GLC Standard Spacer for Large Base – Includes (2) Standard Spacer Halves, (2) Self-Tapping Bolts, and (4) 4.70" L (119 mm) Spacer Fasteners  |
| COYGLC-S5-000  | COYOTE GLC Grounding Spacer for Large Base – Includes (1) Standard Spacer Half, (1) Grounding Spacer Half, (1) Ground Stud Mounting Plate, (7) Ground Studs with Fasteners, (1) Bonding Plate, (1) Standard Access Cover, (7) Ground Lead Assemblies, (2) Self-Tapping Bolts, and (4) 4.70" L (119 mm) Spacer Fasteners |
| COYGLC-S6-000  | COYOTE GLC Dual Grounding Spacer for Large Base – Includes (2) Grounding Spacer Halves, (2) Ground Stud Mounting Plate, (14) Ground Studs with Fasteners, (2) Bonding Plate, (2) Standard Access Cover, (14) Ground Lead Assemblies, (2) Self-Tapping Bolts, and (4) 4.70" L (119 mm) Spacer Fasteners                  |


## ACCESSORIES FOR CROSS-CONNECT APPLICATIONS




**6-Port SC/APC Adapter Module**



**8-Port SC/UPC Adapter Module**




**12-Port SC/APC Adapter Module**




**16-Port LC/UPC Adapter Module**

### COYOTE Adapter Modules

| Catalog Number | Description  |
|----------------|--|
| 6SCAPC         | Adapter Kit – Includes (1) 6-Port SC/APC Adapter Module  |
| 8SCAPC         | Adapter Kit – Includes (1) 8-Port SC/APC Adapter Module  |
| 12SMDSCA       | Adapter Kit – Includes (1) 12-Port SC/APC Adapter Module |
| 6SMSC          | Adapter Kit – Includes (1) 6-Port SC/UPC Adapter Module  |
| 8SMSC          | Adapter Kit – Includes (1) 8-Port SC/UPC Adapter Module  |
| 12SMDSC        | Adapter Kit – Includes (1) 12-Port SC/UPC Adapter Module |
| 12SMLCA        | Adapter Kit – Includes (1) 12-Port LC/APC Adapter Module |
| 16SMLCA        | Adapter Kit – Includes (1) 16-Port LC/APC Adapter Module |
| 24LCAPC        | Adapter Kit – Includes (1) 24-Port LC/APC Adapter Module |
| 12SMLC         | Adapter Kit – Includes (1) 12-Port LC/UPC Adapter Module |
| 16SMLC         | Adapter Kit – Includes (1) 16-Port LC/UPC Adapter Module |
| 24SMLC         | Adapter Kit – Includes (1) 24-Port LC/UPC Adapter Module |

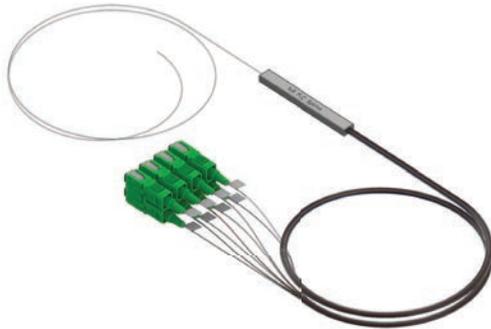

**1x8 SC/APC PLC Pre-Connectorized Splitter**

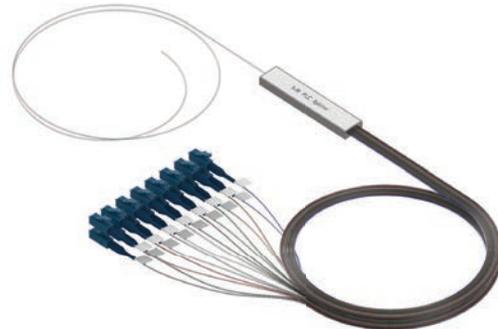

**1x16 LC/UPC PLC Pre-Connectorized Splitter**

### COYOTE GLC Pre-Connectorized Splitters

| Catalog Number  | Description   |
|-----------------|---|
| COYGLC-1X8-SCA  | Pre-Connectorized Splitter – 1x8 SC/APC with 24" Output Legs  |
| COYGLC-1X16-SCA | Pre-Connectorized Splitter – 1x16 SC/APC with 24" Output Legs |
| COYGLC-1X32-SCA | Pre-Connectorized Splitter – 1x32 SC/APC with 24" Output Legs |
| COYGLC-1X8-SCU  | Pre-Connectorized Splitter – 1x8 SC/UPC with 24" Output Legs  |
| COYGLC-1X16-SCU | Pre-Connectorized Splitter – 1x16 SC/UPC with 24" Output Legs |
| COYGLC-1X32-SCU | Pre-Connectorized Splitter – 1x32 SC/UPC with 24" Output Legs |
| COYGLC-1X8-LCA  | Pre-Connectorized Splitter – 1x8 LC/APC with 24" Output Legs  |
| COYGLC-1X16-LCA | Pre-Connectorized Splitter – 1x16 LC/APC with 24" Output Legs |
| COYGLC-1X32-LCA | Pre-Connectorized Splitter – 1x32 LC/APC with 24" Output Legs |
| COYGLC-1X8-LCU  | Pre-Connectorized Splitter – 1x8 LC/UPC with 24" Output Legs  |
| COYGLC-1X16-LCU | Pre-Connectorized Splitter – 1x16 LC/UPC with 24" Output Legs |
| COYGLC-1X32-LCU | Pre-Connectorized Splitter – 1x32 LC/UPC with 24" Output Legs |

## ACCESSORIES FOR CROSS-CONNECT APPLICATIONS



**2 mm Jacketed SC/APC Pigtails with Short Connector Boots**



**2 mm Jacketed SC/UPC Pigtails with Short Connector Boots**



**2 mm Jacketed LC/APC Pigtails with Short Connector Boots**



**2 mm Jacketed LC/UPC Pigtails with Short Connector Boots**

### COYOTE 2 mm Jacketed Fiber Pigtail Kits - Short Boot Connectors

| Catalog Number    | Description  |
|-------------------|--|
| COYTRM-2PK-SCA-SB | Pigtail Kit – Includes (2) 2 mm SC/APC Jacketed Fiber Pigtails with Short Boot Connectors, 2 meters Long |
| COYTRM-3PK-SCA-SB | Pigtail Kit – Includes (3) 2 mm SC/APC Jacketed Fiber Pigtails with Short Boot Connectors, 2 meters Long |
| COYTRM-4PK-SCA-SB | Pigtail Kit – Includes (4) 2 mm SC/APC Jacketed Fiber Pigtails with Short Boot Connectors, 2 meters Long |
| COYTRM-2PK-SCU-SB | Pigtail Kit – Includes (2) 2 mm SC/UPC Jacketed Fiber Pigtails with Short Boot Connectors, 2 meters Long |
| COYTRM-3PK-SCU-SB | Pigtail Kit – Includes (3) 2 mm SC/UPC Jacketed Fiber Pigtails with Short Boot Connectors, 2 meters Long |
| COYTRM-4PK-SCU-SB | Pigtail Kit – Includes (4) 2 mm SC/UPC Jacketed Fiber Pigtails with Short Boot Connectors, 2 meters Long |
| COYTRM-4PK-LCA-SB | Pigtail Kit – Includes (4) 2 mm LC/APC Jacketed Fiber Pigtails with Short Boot Connectors, 2 meters Long |
| COYTRM-4PK-LCU-SB | Pigtail Kit – Includes (4) 2 mm LC/UPC Jacketed Fiber Pigtails with Short Boot Connectors, 2 meters Long |



**2 mm Jacketed SC/APC Pigtails with Standard Connector Boots**



**2 mm Jacketed SC/UPC Pigtails with Standard Connector Boots**



**2 mm Jacketed LC/APC Pigtails with Standard Connector Boots**




**2 mm Jacketed LC/UPC Pigtails with Standard Connector Boots**

### COYOTE 2 mm Jacketed Fiber Pigtail Kits - Standard Boot Connectors

| Catalog Number | Description   |
|----------------|---|
| COYTRM-2PK-SCA | Pigtail Kit – Includes (2) 2 mm SC/APC Jacketed Fiber Pigtails with Standard Boot Connectors, 2 meters Long |
| COYTRM-3PK-SCA | Pigtail Kit – Includes (3) 2 mm SC/APC Jacketed Fiber Pigtails with Standard Boot Connectors, 2 meters Long |
| COYTRM-4PK-SCA | Pigtail Kit – Includes (4) 2 mm SC/APC Jacketed Fiber Pigtails with Standard Boot Connectors, 2 meters Long |
| COYTRM-2PK-SCU | Pigtail Kit – Includes (2) 2 mm SC/UPC Jacketed Fiber Pigtails with Standard Boot Connectors, 2 meters Long |
| COYTRM-3PK-SCU | Pigtail Kit – Includes (3) 2 mm SC/UPC Jacketed Fiber Pigtails with Standard Boot Connectors, 2 meters Long |
| COYTRM-4PK-SCU | Pigtail Kit – Includes (4) 2 mm SC/UPC Jacketed Fiber Pigtails with Standard Boot Connectors, 2 meters Long |
| COYTRM-4PK-LCA | Pigtail Kit – Includes (4) 2 mm LC/APC Jacketed Fiber Pigtails with Standard Boot Connectors, 2 meters Long |
| COYTRM-4PK-LCU | Pigtail Kit – Includes (4) 2 mm LC/UPC Jacketed Fiber Pigtails with Standard Boot Connectors, 2 meters Long |



## ACCESSORIES FOR CROSS-CONNECT APPLICATIONS

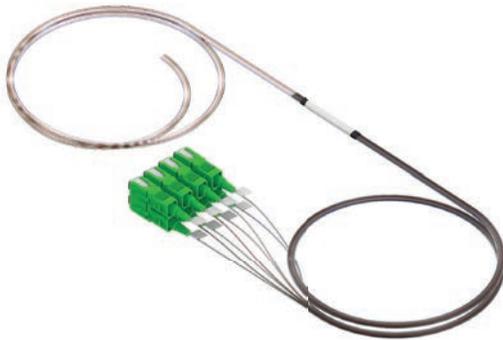

8 Fiber SC/APC GLC Pigtail Bundle



16 Fiber LC/UPC GLC Pigtail Bundle

### COYOTE GLC Pigtail Bundles

| Catalog Number  | Description  |
|-----------------|--|
| COYGLC-4FB-SCA  | GLC Pigtail Bundle – Includes (4) SC/APC 900 μm Pigtails with 24" Output Legs  |
| COYGLC-8FB-SCA  | GLC Pigtail Bundle – Includes (8) SC/APC 900 μm Pigtails with 24" Output Legs  |
| COYGLC-12FB-SCA | GLC Pigtail Bundle – Includes (12) SC/APC 900 μm Pigtails with 24" Output Legs |
| COYGLC-16FB-SCA | GLC Pigtail Bundle – Includes (16) SC/APC 900 μm Pigtails with 24" Output Legs |
| COYGLC-32FB-SCA | GLC Pigtail Bundle – Includes (32) SC/APC 900 μm Pigtails with 24" Output Legs |
| COYGLC-4FB-SCU  | GLC Pigtail Bundle – Includes (4) SC/UPC 900 μm Pigtails with 24" Output Legs  |
| COYGLC-8FB-SCU  | GLC Pigtail Bundle – Includes (8) SC/UPC 900 μm Pigtails with 24" Output Legs  |
| COYGLC-12FB-SCU | GLC Pigtail Bundle – Includes (12) SC/UPC 900 μm Pigtails with 24" Output Legs |
| COYGLC-16FB-SCU | GLC Pigtail Bundle – Includes (16) SC/UPC 900 μm Pigtails with 24" Output Legs |
| COYGLC-32FB-SCU | GLC Pigtail Bundle – Includes (32) SC/UPC 900 μm Pigtails with 24" Output Legs |
| COYGLC-4FB-LCA  | GLC Pigtail Bundle – Includes (4) LC/APC 900 μm Pigtails with 24" Output Legs  |
| COYGLC-8FB-LCA  | GLC Pigtail Bundle – Includes (8) LC/APC 900 μm Pigtails with 24" Output Legs  |
| COYGLC-12FB-LCA | GLC Pigtail Bundle – Includes (12) LC/APC 900 μm Pigtails with 24" Output Legs |
| COYGLC-16FB-LCA | GLC Pigtail Bundle – Includes (16) LC/APC 900 μm Pigtails with 24" Output Legs |
| COYGLC-32FB-LCA | GLC Pigtail Bundle – Includes (32) LC/APC 900 μm Pigtails with 24" Output Legs |
| COYGLC-4FB-LCU  | GLC Pigtail Bundle – Includes (4) LC/UPC 900 μm Pigtails with 24" Output Legs  |
| COYGLC-8FB-LCU  | GLC Pigtail Bundle – Includes (8) LC/UPC 900 μm Pigtails with 24" Output Legs  |
| COYGLC-12FB-LCU | GLC Pigtail Bundle – Includes (12) LC/UPC 900 μm Pigtails with 24" Output Legs |
| COYGLC-16FB-LCU | GLC Pigtail Bundle – Includes (16) LC/UPC 900 μm Pigtails with 24" Output Legs |
| COYGLC-32FB-LCU | GLC Pigtail Bundle – Includes (32) LC/UPC 900 μm Pigtails with 24" Output Legs |

### COYOTE Field Installable Connectors

| Catalog Number | Description   |
|----------------|---|
| 80813501       | Field Installable Connector Kit – Includes (6) SC/APC Field Installable Connectors  |
| 80813502       | Field Installable Connector Kit – Includes (12) SC/APC Field Installable Connectors   |
| 80813503       | Field Installable Connector Kit – Includes (6) SC/UPC Field Installable Connectors  |
| 80813504       | Field Installable Connector Kit – Includes (12) SC/UPC Field Installable Connectors   |
| 80813505       | Field Installable Connector Kit – Includes (6) LC/APC Field Installable Connectors  |
| 80813506       | Field Installable Connector Kit – Includes (12) LC/APC Field Installable Connectors   |
| 80813507       | Field Installable Connector Kit – Includes (6) LC/UPC Field Installable Connectors  |
| 80813508       | Field Installable Connector Kit – Includes (12) LC/UPC Field Installable Connectors   |
| FAC-KIT        | Field Installation Kit – Includes (1) Carrying Bag, (1) Precision Cleaver, (1) Pen Style Cleaner for SC Connectors, (1) Pen Style Cleaner for LC Connectors, (1) Fiber Stripper, (1) Kevlar® Scissor, (1) Pack of Alcohol Wipes, (10) LC/UPC 900 μm Connectors, (10) SC/UPC 900 μm Connectors and Instruction Sheet |

## ACCESSORIES FOR OPTITAP® APPLICATIONS



OptiTap Adapter



Hardened Adapter Installation Tool

### Hardened Adapter Accessories

| Catalog Number | Description   |
|----------------|---|
| 8003715        | Hardened Adapter Kit – Includes (1) OptiTap Adapter and (1) Installation Tool |
| 8004115        | Bulk Pack of OptiTap Adapters – Includes (10) OptiTap Adapters                |
| 80807972       | Hardened Adapter Installation Tool  |
| 8003724        | Port Plug Kit – Included (1) Port Plug and (1) Installation Tool              |
| 8004060        | Bulk Pack of Port Plugs – Includes (10) Port Plugs                            |

## ACCESSORIES



Retention Stake with Anchor Plate



Retention Stake Driver Cap

### COYOTE GLC Accessories

| Catalog Number | Description   |
|----------------|---|
| 80809958       | Splice Tray, COYOTE LITE-GRIP® Short, Low Profile, 24 CT., Single Fusion    |
| 80813152       | Splice Tray, COYOTE LITE-GRIP Short, Low Profile, 36 CT., Single Fusion     |
| 80808945       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 40 CT., Single Fusion    |
| LGSTR144       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 144 CT., Mass Fusion     |
| 80810086       | Splice Tray, COYOTE LITE-GRIP Long, Standard Profile, 36 CT., Single Fusion |
| LGSTS72        | Splice Tray, COYOTE LITE-GRIP Long, Deep Profile, 72 CT., Single Fusion     |
| LGSTR216       | Splice Tray, COYOTE LITE-GRIP Long, Deep Profile, 216 CT., Mass Fusion      |
| 8004160        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Mass Fusion          |
| 8004095        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Single Fusion        |
| 8003717        | Heat Shrink Splice Protector Kit – Includes (50) 60 mm Single Fusion        |
| 80809788       | Retention Stake with Anchor Plate for Small Base 42" (1066 mm)              |
| 80809791       | Retention Stake Driver Cap  |
| 80803989       | Shield Connector  |
| 80808613       | Express Fiber Storage Ring for Deep Profile LITE-GRIP Splice Trays          |
| 80809205       | Strength Member Bracket Kit – Includes (2) Short L-Brackets                 |
| 80808651       | Strength Member Bracket Kit – Includes (4) Long L-Brackets                  |
| 80811037       | 4-Port Cable Retention Bobbin Kit   |
| 80811036       | 6-Port Drop Cable Retention Bobbin Kit                                      |
| 80812928       | 6/8-Port Drop Cable Retention Bobbin Kit                                    |



## COYOTE® MPC

The **COYOTE MPC (Multi-Purpose Closure)** is constructed of durable, UV stabilized, flame retardant polymer to permit interior or exterior applications. Eight cable entrance ports around the exterior accept an easy-to-use grommet system and standard commercially available fittings. The closure's interior can be configured to address slack storage, splicing, cross-connect, hardened adapter applications or any combination. Pre-terminated configurations are also available to minimize the amount of labor required during installation.

### FEATURES AND BENEFITS


- Interior grid hole pattern allows custom organization of various components
- Offers NEMA4 performance
- Constructed with UL94-5VA rated polymer compounds, to provide the highest flame resistant rating
- Flexible grommet sealing technology supports a wide range of flat and round cable profiles
- Integrated silicone foam rubber gasket designed to eliminate water entry
- 8 cable entrance ports around closure exterior

# COYOTE® STANDARD MPC

## Specifications

|  |  |
|--|--|
| Catalog Numbers  | COYMPC-000, COYMPC-001, COYMPC-002, COYMPC-004, COYMPC-005, COYMPC-006 |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945), Mass Fusion (Deep Profile, LGSTR144) | 96, 144, 80, 288   |
| Number of Splice Trays – 80809958, 80813152, 80808945, LGSTR144  | 4, 4, 2, 2   |
| Cable Ports <sup>1</sup>   | 8  |
| Cable Diameters  | 0.093" – 1.00" (2.4 – 25.4 mm)   |
| Configuration  | In-Line or Butt  |
| Application  | Pole/Wall  |
| Ingress Protection   | In accordance to Telcordia® GR-771-CORE, NEMA4, IP-66                  |
| Size <sup>2</sup>  | 17.5" L x 14.4" W x 4.0" D (445 x 366 x 102 mm)                        |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port.  
<sup>2</sup> Outermost part of the assembly

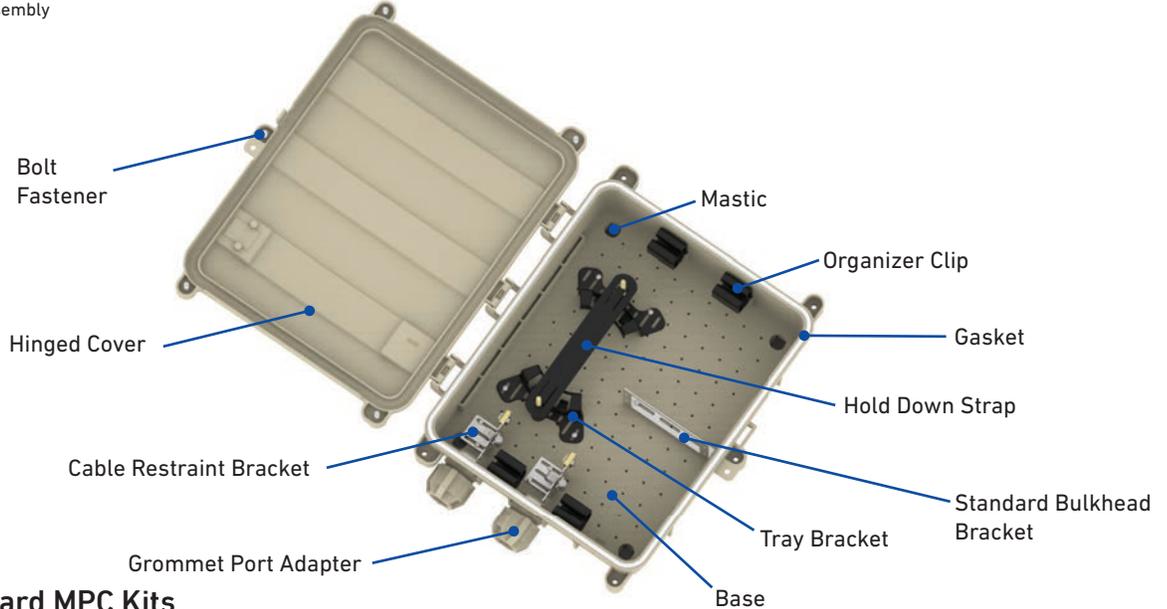

## COYOTE Standard MPC Kits

| Catalog Number | Description   |
|----------------|---|
| COYMPC-000     | COYOTE Standard MPC – Empty   |
| COYMPC-001     | COYOTE Standard MPC – Includes (1) 4-Hole Grommet Port Adapter Kit 0.120" – 0.275" (3.0 – 7.0 mm), and (1) Organizer Clip Kit   |
| COYMPC-002     | COYOTE Standard MPC for OptiTap® Adapters – Includes (1) 4-Hole Grommet Port Adapter Kit 0.120" – 0.275" (3.0 – 7.0 mm), (1) 8-Hole Grommet Port Adapter Kit 0.120" – 0.200" (3.0 – 5.1 mm), (1) Bulkhead with 2 OptiTap Adapters, (1) Organizer Clip Kit, (1) Storage Bracket Kit, and (1) Grommet Port Adapter Shroud |
| COYMPC-004     | COYOTE Standard MPC – Includes (1) 4-Hole Grommet Port Adapter Kit 0.120" – 0.275" (3.0 – 7.0 mm), (1) 2-Hole Grommet Port Adapter 0.275" – 0.50" (7.0 – 12.7 mm), (2) Organizer Clip Kit, (2) Cable Restraint Brackets, (2) Tray Brackets, and (1) Standard Short Splice Tray – 12 Splice CT.                          |
| COYMPC-005     | COYOTE Standard MPC – Includes (3) 4-Hole Grommet Port Adapter Kit 0.120" – 0.275" (3.0 – 7.0 mm), (1) 1-Hole Grommet Port Adapter Kit 0.40" – 0.60" (10.2 – 15.2 mm), (2) 6 SC/UPC Adapter Plates, (2) Organizer Clip Kit, and (4) Cable Restraint Brackets  |
| COYMPC-006     | COYOTE Standard MPC – Includes (1) 1-Hole Grommet Port Adapter Kit 0.40" – 0.60" (10.2 – 15.2 mm), (2) Organizer Clip Kit, (1) Cable Restraint Bracket, (1) LITE-GRIP® Short Splice Tray – 16 Splice CT., and (1) Splice Tray Support Kit   |

OptiTap® is a registered trademark of Corning Cable Systems.  
 Telcordia® is a registered trademark of Telcordia Technologies, Inc., now part of Ericsson.  
 ©2022 Preformed Line Products CO-CA-1004-16




## COYOTE® DEEP MPC

### Specifications

|  |   |
|--|---|
| Catalog Numbers  | COYMPC-D000, COYMPC-D001, COYMPC-D005                 |
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Low Profile, 80813152), Single Fusion (Deep Profile, 80808945), Mass Fusion (Deep Profile, LGSTR144) | 288, 432, 240, 864                                    |
| Number of Splice Trays – 80809958, 80813152, 80808945, LGSTR144  | 12, 12, 6, 6  |
| Cable Ports <sup>1</sup>   | 8   |
| Cable Diameters  | 0.093" – 1.00" (2.4 – 25.4 mm)                        |
| Configuration  | In-Line or Butt                                       |
| Application  | Pole/Wall   |
| Ingress Protection   | In accordance to Telcordia® GR-771-CORE, NEMA4, IP-66 |
| Size <sup>2</sup>  | 17.5" L x 14.4" W x 7.0" D (445 x 366 x 178 mm)       |

<sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port.

<sup>2</sup> Outermost part of the assembly

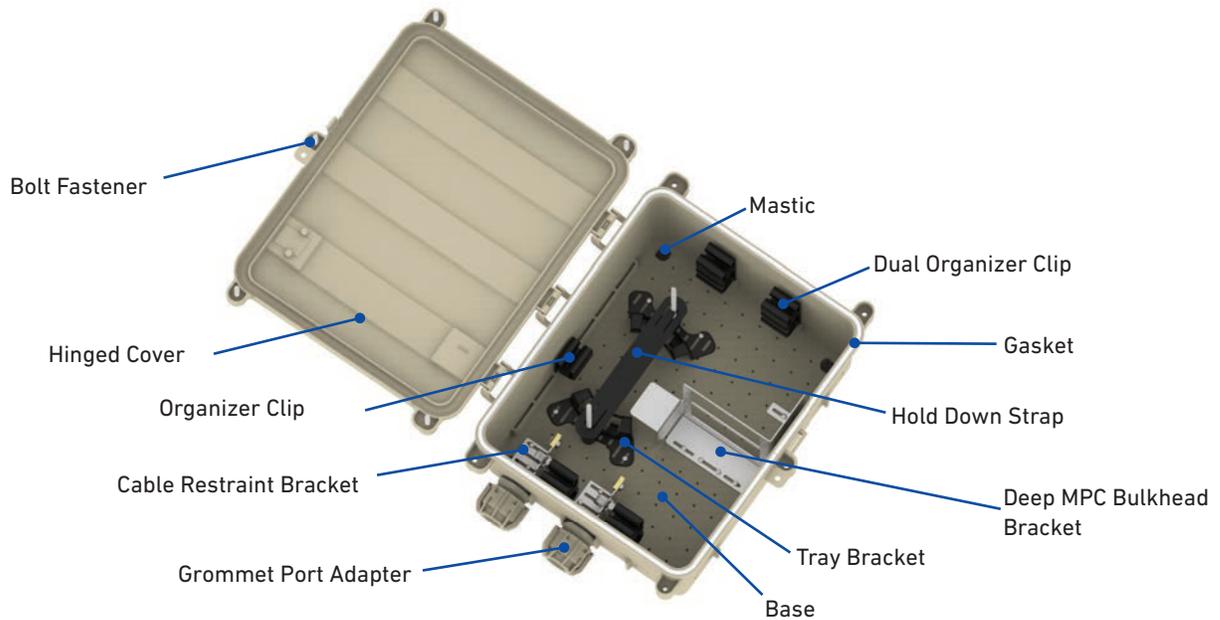

### COYOTE Deep MPC Kits

| Catalog Number | Description   |
|----------------|---|
| COYMPC-D000    | COYOTE Deep MPC – Empty   |
| COYMPC-D001    | COYOTE Deep MPC – Includes (1) 4-Hole Grommet Port Adapter Kit 0.120" – 0.275" (3.0 – 7.0 mm), (1) Cable Restraint Bracket and (2) Dual Organizer Clip Kits   |
| COYMPC-D005    | COYOTE Deep MPC – Includes (1) 1-Hole Grommet Port Adapter Kit 0.40" – 0.60" (10.2 – 15.2 mm), (3) 4-Hole Grommet Port Adapter Kit 0.120" – 0.275" (3.0 – 7.0 mm), (1) Splice Tray Support Kit, (1) Deep MPC Bulkhead Kit, (2) 6 SC/UPC Adapter Plates, (4) Cable Restraint Brackets and (2) Dual Organizer Clip Kits |



## ACCESSORIES

### COYOTE MPC Grommet Port Adapter Kits


| Catalog Number | Description   |
|----------------|---|
| 8003827        | 1-Hole Grommet Port Adapter 0.40" – 0.60" (10.2 – 15.2 mm)  |
| 8003826        | 1-Hole Grommet Port Adapter 0.60" – 0.825" (15.2 – 21.0 mm) |
| 8003825        | 1-Hole Grommet Port Adapter 0.825" – 1.00" (21.0 – 25.4 mm) |
| 8003828        | 2-Hole Grommet Port Adapter 0.275" – 0.500" (7.0 – 12.7 mm) |
| 8003812        | 4-Hole Grommet Port Adapter 0.120" – 0.275" (3.0 – 7.0 mm)  |
| 8003818        | 8-Hole Grommet Port Adapter 0.120" – 0.200" (3.0 – 5.1 mm)  |
| 80808618       | Stepped Grommet Kit 0.070" – 1.00" (1.8 – 25.4 mm)          |

### COYOTE Standard and Deep MPC Accessories

| Catalog Number | Description   |
|----------------|---|
| 80809958       | Splice Tray, COYOTE LITE-GRIP® Short, Low Profile, 24 CT., Single Fusion  |
| 80813152       | Splice Tray, COYOTE LITE-GRIP Short, Low Profile, 36 CT., Single Fusion   |
| 80808945       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 40 CT., Single Fusion  |
| LGSTR144       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 144 CT., Mass Fusion   |
| 8003813        | Organizer Clip Kit – Includes (3) Clips   |
| 8003811        | Storage Bracket Kit – Includes (2) Brackets   |
| 80808853       | Splice Tray Support Kit – Includes (2) Tray Brackets, (1) Hold Down Strap, (4) Nylon Cable Clamps, and (1) Felt Strip |
| 8003829        | Cable Restraint Bracket Kit – Includes (1) Restraint Bracket  |
| 80808508       | OptiTap® 2-Port Internal Bracket Kit – Includes (2) Adapters  |
| 8003824        | OptiTap 8-Port Internal Bracket Kit – Does NOT Include Adapters   |
| 80808916       | Empty Bulkhead Kit – Accepts 2 Adapter Modules  |
| 80808982       | Pole/Wall Mounting Bracket  |

### COYOTE Deep MPC Accessories

| Catalog Number | Description                                    |
|----------------|--|
| 8003870        | Dual Organizer Clip Kit – Includes (3) Clips   |
| 80808960       | Empty Bulkhead Kit – Accepts 4 Adapter Modules |

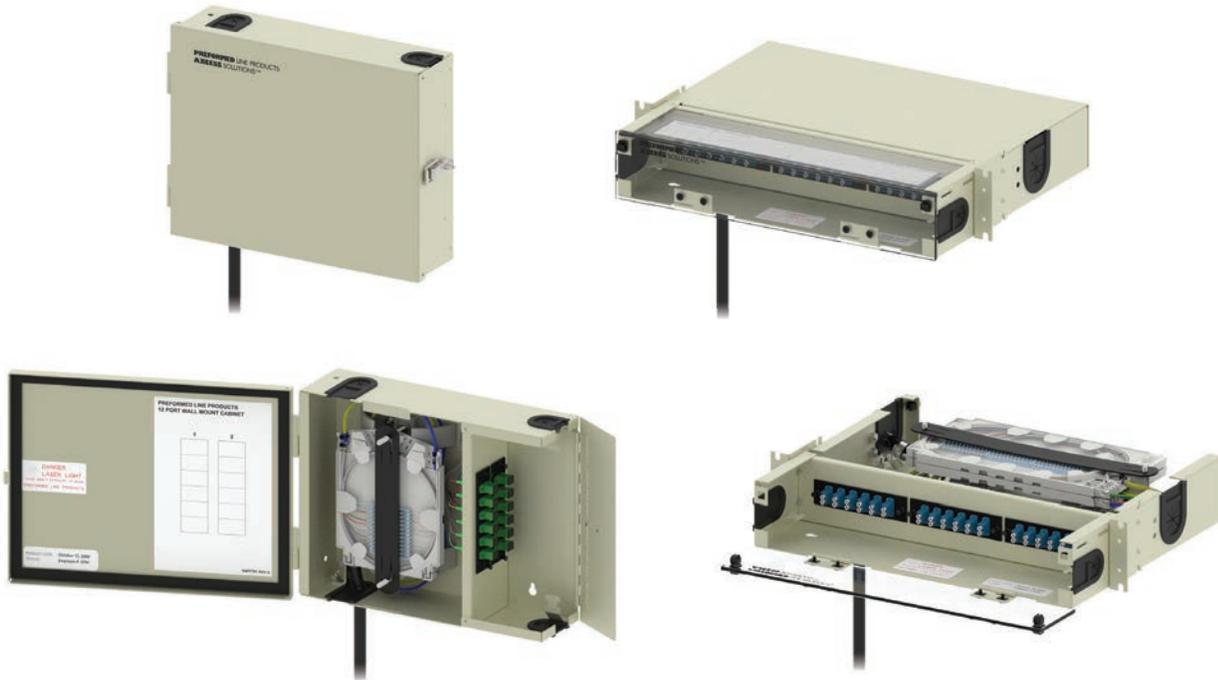

## COYOTE® ACCESS SOLUTIONS™ CABINETS

The **COYOTE Access Solutions Cabinets** are pre-assembled to your exact specifications to begin splicing right out of the carton, providing a substantial labor savings. Each cabinet is made from rugged 16 gauge steel and has a durable powder-coat finish that comes in almond or black. High-density splicing and patching can be achieved in one cabinet with the craft-friendly COYOTE splice trays and integrated fiber storage. Cabinets can be ordered with adapter modules (UPC or APC) and color coded pigtailed to match your application. All multi-mode fiber grades available.

### FEATURES AND BENEFITS

#### Wall Mount Cabinets

- Provides protected fiber splicing and connectivity
- Optional lock for inner door secures the splicing compartment
- Each cabinet may be ordered with adapter modules or pre-terminated with pigtailed to an exact specification
- Pre-terminated cabinets are 100% tested for optical insertion loss after assembly
- Installation and mounting hardware included

#### Rack Mount Cabinets

- Provides protected fiber splicing and connectivity
- Universal mounting bracket to fit 19" (482 mm) or 23" (584 mm) racks
- Each cabinet may be ordered with adapter modules or pre-terminated with pigtailed to an exact specification
- Pre-terminated cabinets are 100% tested for optical insertion loss after assembly
- Clear front door and access panels are removable for easy entry
- Lockable rear splicing compartment

## WALL MOUNT CABINETS



### Specifications: WDC2

| Catalog Numbers  | WDC2A <sup>1</sup> and WDC2B <sup>1</sup>     |
|--|---|
| Splice Capacity (Maximum) – Single Fusion (Standard Profile, 80806033) | 24  |
| Number of Splice Trays – 80806033                                      | 2   |
| Adapter Port Quantity (Maximum)  | 24 ST, 24 SC, or 24 LC                        |
| Colors   | Almond or Black                               |
| Size <sup>2</sup>  | 10" H x 13" W x 3.5" D<br>(254 x 330 x 89 mm) |

<sup>1</sup> A for Almond or B for Black

<sup>2</sup> Outermost part of the assembly



### Specifications: WDC4

| Catalog Numbers   | WDC4A <sup>1</sup> and WDC4B <sup>1</sup>     |
|---|---|
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 8003468), Single Fusion (Standard Profile, 80806033), | 48, 24  |
| Number of Splice Trays – 8003468, 80806033  | 2, 2  |
| Adapter Port Quantity (Maximum)   | 48 ST, 48 SC, or 48 LC                        |
| Colors  | Almond or Black                               |
| Size <sup>2</sup>   | 14" H x 13" W x 3.5" D<br>(356 x 330 x 89 mm) |

<sup>1</sup> A for Almond or B for Black

<sup>2</sup> Outermost part of the assembly



### Specifications: WDC8

| Catalog Numbers  | WDC8A <sup>1</sup> and WDC8B <sup>1</sup>      |
|--|--|
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 8001127), Single Fusion (Standard Profile, 80805514) | 96, 72   |
| Number of Splice Trays – 8001127, 80805514   | 4, 3   |
| Adapter Port Quantity (Maximum)  | 96 ST, 96 SC, or 96 LC                         |
| Colors   | Almond or Black                                |
| Size <sup>2</sup>  | 17" H x 13" W x 5.5" D<br>(432 x 330 x 140 mm) |

<sup>1</sup> A for Almond or B for Black

<sup>2</sup> Outermost part of the assembly



### Specifications: WDC12

| Catalog Numbers  | WDC12A <sup>1</sup> and WDC12B <sup>1</sup>    |
|--|--|
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 8001127), Single Fusion (Standard Profile, 80805514) | 144, 144                                       |
| Number of Splice Trays – 8001127, 80805514   | 6, 6   |
| Adapter Port Quantity (Maximum)  | 144 ST, 144 SC, or 144 LC                      |
| Colors   | Almond or Black                                |
| Size <sup>2</sup>  | 22" H x 17" W x 6.1" D<br>(559 x 432 x 155 mm) |

<sup>1</sup> A for Almond or B for Black

<sup>2</sup> Outermost part of the assembly



## RACK MOUNT CABINETS



## Specifications: RDC2

| Catalog Numbers   | RDC2A <sup>1</sup> and RDC2B <sup>1</sup>     |
|---|---|
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 80809958), Single Fusion (Standard Profile, 80806033) | 24, 12  |
| Number of Splice Trays – 80809958, 80806033   | 1, 1  |
| Adapter Port Quantity (Maximum)   | 24 ST, 24 SC, or 24 LC                        |
| Rack Units  | 1   |
| Colors  | Almond or Black                               |
| Size <sup>2</sup>   | 1.8" H x 17" W x 14" D<br>(45 x 432 x 356 mm) |

<sup>1</sup> A for Almond or B for Black<sup>2</sup> Outermost part of the assembly

## Specifications: RDC3

| Catalog Numbers  | RDC3A <sup>1</sup> and RDC3B <sup>1</sup>     |
|--|---|
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 8001127), Single Fusion (Standard Profile, 80805514) | 72, 48  |
| Number of Splice Trays – 8001127, 80805514   | 3, 2  |
| Adapter Port Quantity (Maximum)  | 36 ST, 36 SC, or 36 LC                        |
| Rack Units   | 2   |
| Colors   | Almond or Black                               |
| Size <sup>2</sup>  | 3.5" H x 17" W x 14" D<br>(89 x 432 x 356 mm) |

<sup>1</sup> A for Almond or B for Black<sup>2</sup> Outermost part of the assembly

## Specifications: RDC6

| Catalog Numbers  | RDC6A <sup>1</sup> and RDC6B <sup>1</sup>     |
|--|---|
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 8001127), Single Fusion (Standard Profile, 80805514) | 72, 48  |
| Number of Splice Trays – 8001127, 80805514   | 3, 2  |
| Adapter Port Quantity (Maximum)  | 72 ST, 72 SC, or 72 LC                        |
| Rack Units   | 2   |
| Colors   | Almond or Black                               |
| Size <sup>2</sup>  | 3.5" H x 17" W x 14" D<br>(89 x 432 x 356 mm) |

<sup>1</sup> A for Almond or B for Black<sup>2</sup> Outermost part of the assembly

## RACK MOUNT CABINETS



### Specifications: RDC12

| Catalog Numbers  | RDC12A <sup>1</sup> and RDC12B <sup>1</sup>    |
|--|--|
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 8001127), Single Fusion (Standard Profile, 80805514) | 144, 96  |
| Number of Splice Trays – 8001127, 80805514   | 6, 4   |
| Adapter Port Quantity (Maximum)  | 144 ST, 144 SC, or 144 LC                      |
| Rack Units   | 3  |
| Colors   | Almond or Black                                |
| Size <sup>2</sup>  | 5.3" H x 17" W x 14" D<br>(134 x 432 x 356 mm) |

<sup>1</sup> A for **Almond** or **B** for **Black**

<sup>2</sup> Outermost part of the assembly



### Specifications: RDC12X

| Catalog Numbers  | RDC12XA <sup>1</sup> and RDC12XB <sup>1</sup>  |
|--|--|
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 8001127), Single Fusion (Standard Profile, 80805514) | 144, 144                                       |
| Number of Splice Trays – 8001127, 80805514   | 6, 6   |
| Adapter Port Quantity (Maximum)  | 144 ST, 144 SC, or 144 LC                      |
| Rack Units   | 4  |
| Colors   | Almond or Black                                |
| Size <sup>2</sup>  | 6.7" H x 17" W x 14" D<br>(170 x 432 x 356 mm) |

<sup>1</sup> A for **Almond** or **B** for **Black**

<sup>2</sup> Outermost part of the assembly



### Specifications: RDC24

| Catalog Numbers  | RDC24A <sup>1</sup> and RDC24B <sup>1</sup>   |
|--|---|
| Splice Capacity (Maximum) – Single Fusion (Low Profile, 8001127), Single Fusion (Standard Profile, 80805514) | 288, 240                                      |
| Number of Splice Trays – 8001127, 80805514   | 12, 10  |
| Adapter Port Quantity (Maximum)  | 288 ST, 288 SC, or 288 LC                     |
| Rack Units   | 8   |
| Colors   | Almond or Black                               |
| Size <sup>2</sup>  | 14" H x 17" W x 14" D<br>(356 x 432 x 356 mm) |

<sup>1</sup> A for **Almond** or **B** for **Black**

<sup>2</sup> Outermost part of the assembly

## OPTICAL COMPONENTS AND ACCESSORIES



**6-Port ST Adapter Module    6-Port SC/APC Adapter Module    12-Port SC/UPC Adapter Module    16-Port LC/APC Adapter Module**

### COYOTE Adapter Modules

| Catalog Number | Description   |
|----------------|---|
| 6SCAPC         | Adapter Module Kit – Includes (1) 6-Port SC/APC Adapter Module  |
| 8SCAPC         | Adapter Module Kit – Includes (1) 8-Port SC/APC Adapter Module  |
| 12SMDSCA       | Adapter Module Kit – Includes (1) 12-Port SC/APC Adapter Module |
| 6SMSC          | Adapter Module Kit – Includes (1) 6-Port SC/UPC Adapter Module  |
| 8SMSC          | Adapter Module Kit – Includes (1) 8-Port SC/UPC Adapter Module  |
| 12SMDSC        | Adapter Module Kit – Includes (1) 12-Port SC/UPC Adapter Module |
| 12SMLCA        | Adapter Module Kit – Includes (1) 12-Port LC/APC Adapter Module |
| 16SMLCA        | Adapter Module Kit – Includes (1) 16-Port LC/APC Adapter Module |
| 24LCAPC        | Adapter Module Kit – Includes (1) 24-Port LC/APC Adapter Module |
| 6SMLC          | Adapter Module Kit – Includes (1) 6-Port LC/UPC Adapter Module  |
| 12SMLC         | Adapter Module Kit – Includes (1) 12-Port LC/UPC Adapter Module |
| 16SMLC         | Adapter Module Kit – Includes (1) 16-Port LC/UPC Adapter Module |
| 24SMLC         | Adapter Module Kit – Includes (1) 24-Port LC/UPC Adapter Module |
| 6SMST          | Adapter Module Kit – Includes (1) 6-Port ST/UPC Adapter Module  |
| 8SMST          | Adapter Module Kit – Includes (1) 8-Port ST/UPC Adapter Module  |
| 12SMST         | Adapter Module Kit – Includes (1) 12-Port ST/UPC Adapter Module |



**6 Fiber LC/APC Pigtail Cable Assembly    12 Fiber SC/UPC Pigtail Cable Assembly    12 Fiber ST Pigtail Cable Assembly**

### COYOTE Fiber Pigtail Cable Assemblies

| Catalog Number | Description   |
|----------------|---|
| P6SCA3         | 3 Meter Pigtail Cable Assembly – Includes (6) Bundled SC/APC 900 µm Pigtails in Sleeving  |
| P12SCA3        | 3 Meter Pigtail Cable Assembly – Includes (12) Bundled SC/APC 900 µm Pigtails in Sleeving |
| P6SCU3         | 3 Meter Pigtail Cable Assembly – Includes (6) Bundled SC/UPC 900 µm Pigtails in Sleeving  |
| P12SCU3        | 3 Meter Pigtail Cable Assembly – Includes (12) Bundled SC/UPC 900 µm Pigtails in Sleeving |
| P6ST3          | 3 Meter Pigtail Cable Assembly – Includes (6) Bundled ST 900 µm Pigtails in Sleeving      |
| P12ST3         | 3 Meter Pigtail Cable Assembly – Includes (12) Bundled ST 900 µm Pigtails in Sleeving     |
| P6LCA3         | 3 Meter Pigtail Cable Assembly – Includes (6) Bundled LC/APC 900 µm Pigtails in Sleeving  |
| P12LCA3        | 3 Meter Pigtail Cable Assembly – Includes (12) Bundled LC/APC 900 µm Pigtails in Sleeving |
| P6LC3          | 3 Meter Pigtail Cable Assembly – Includes (6) Bundled LC/UPC 900 µm Pigtails in Sleeving  |
| P12LC3         | 3 Meter Pigtail Cable Assembly – Includes (12) Bundled LC/UPC 900 µm Pigtails in Sleeving |

All multi-mode fiber grades are available.

## OPTICAL COMPONENTS AND ACCESSORIES

### Accessories

| Catalog Number | Description   |
|----------------|---|
| 80807701       | Splice Tray, COYOTE Legacy Short, Low Profile, 12 CT., Single Fusion                  |
| 80806033       | Splice Tray, COYOTE Legacy Short, Standard Profile, 12 CT., Single Fusion             |
| 8003468        | Splice Tray, COYOTE Legacy Short, Standard Profile, 24 CT., Single Fusion             |
| 8001127        | Splice Tray, COYOTE Legacy Long, Low Profile, 36 <sup>1</sup> CT., Single Fusion      |
| 80805514       | Splice Tray, COYOTE Legacy Long, Standard Profile, 36 <sup>1</sup> CT., Single Fusion |
| 80805515       | Splice Tray, COYOTE Legacy Long, Deep Profile, 144 CT., Mass Fusion                   |
| 800014149B     | Rodent Protection Kit for RDC3 and RDC6 – Requires Grommet Port Adapter               |
| 800014150B     | Rodent Protection Kit for RDC12 – Requires Grommet Port Adapter                       |
| 80812784B      | Rodent Protection Kit for WDC2 and WDC4 – Requires Grommet Port Adapter               |
| 80812785B      | Rodent Protection Kit for WDC8 – Requires Grommet Port Adapter                        |
| 8003827        | 1-Hole Grommet Port Adapter 0.40" – 0.60" (10.2 – 15.2 mm)                            |
| 8003826        | 1-Hole Grommet Port Adapter 0.60" – 0.825" (15.2 – 21.0 mm)                           |
| 8003825        | 1-Hole Grommet Port Adapter 0.825" – 1.00" (21.0 – 25.4 mm)                           |
| 8003828        | 2-Hole Grommet Port Adapter 0.275" – 0.500" (7.0 – 12.7 mm)                           |
| 8003812        | 4-Hole Grommet Port Adapter 0.120" – 0.275" (3.0 – 7.0 mm)                            |
| 8003818        | 8-Hole Grommet Port Adapter 0.120" – 0.200" (3.0 – 5.1 mm)                            |
| 80808618       | Stepped Grommet Kit 0.070" – 1.00" (1.8 – 25.4 mm)                                    |

<sup>1</sup>24 CT. in pre-terminated cabinets

## ORDERING INFORMATION

### COYOTE Access Solutions Pre-Terminated Cabinets

**X**   **X**   **X**   **X**   **X**  
 (Section 1) (Section 2) (Section 3) (Section 4) (Section 5)

Catalog Number Example: RDC24A96SCU3

#### Section 1

| Cabinet Selection (Select 1) | Description  |
|------------------------------|--|
| WDC2                         | Wall Mount Cabinet up to 24 Fiber Connections and Splices  |
| WDC4                         | Wall Mount Cabinet up to 48 Fiber Connections and Splices  |
| WDC8                         | Wall Mount Cabinet up to 96 Fiber Connections and Splices  |
| WDC12                        | Wall Mount Cabinet up to 144 Fiber Connections and Splices |
| RDC2                         | Rack Mount Cabinet up to 12 Fiber Connections and Splices  |
| RDC3                         | Rack Mount Cabinet up to 36 Fiber Connections and Splices  |
| RDC6                         | Rack Mount Cabinet up to 72 Fiber Connections and Splices  |
| RDC12                        | Rack Mount Cabinet up to 144 Fiber Connections and Splices |
| RDC12X                       | Rack Mount Cabinet up to 144 Fiber Connections and Splices |
| RDC24                        | Rack Mount Cabinet up to 288 Fiber Connections and Splices |

#### Section 2

| Color Options (Select 1) |        |
|--------------------------|--------|
| A                        | Almond |
| B                        | Black  |

#### Section 3

| Adapter Port Quantity |
|-----------------------|
| 0 to 288              |

#### Section 4

| Connector Type (Select 1) |        |
|---------------------------|--------|
| SCA                       | SC/APC |
| SCU                       | SC/UPC |
| LCA                       | LC/APC |
| LCU                       | LC/UPC |
| ST                        | ST/UPC |

#### Section 5

| Pigtail Length (Select 1) |             |
|---------------------------|-------------|
| Blank                     | No Pigtails |
| 3                         | 3 meters    |

**NOTE:** Pre-terminated means factory assembled with all optical ports labeled and tested for insertion loss after assembly



## COYOTE® AXCESS SOLUTIONS™ FIBER WALL PLATES

The **COYOTE Access Solutions Fiber Wall Plates** are compact fiber organizers used to create a fiber demarcation point inside the home, office, or apartment. Internal fiber routing features control bend radius and allows for slack storage outside of the wall cavity. Specific designs also provide for splicing inside the wall plate. Each wall plate is produced from flame retardant compounds, is easy to install and is capable of being mounted directly to a standard electrical junction box or a wall.

### FEATURES AND BENEFITS


#### Fiber Wall Plate

- Designed to store a pre-connectorized pigtail for connection to a mating adapter
- Mounts to standard electrical junction boxes or wall
- Internal fiber routing provides bend radius control
- Hinged door provides open access for easy fiber connection or removal
- Internal adapter with automatic shutter provides protection from laser light output
- Flame retardant

#### Splice & Store Fiber Wall Plate

- Designed for splicing and storing a pre-connectorized fiber pigtail
- Provides up to 8 ft (2430 mm) of 2 mm or 4 ft (1220 mm) of 3 mm jacketed fiber
- Fiber entrance ports through the back and bottom edge of the wall plate
- Flame retardant

## FIBER WALL PLATE

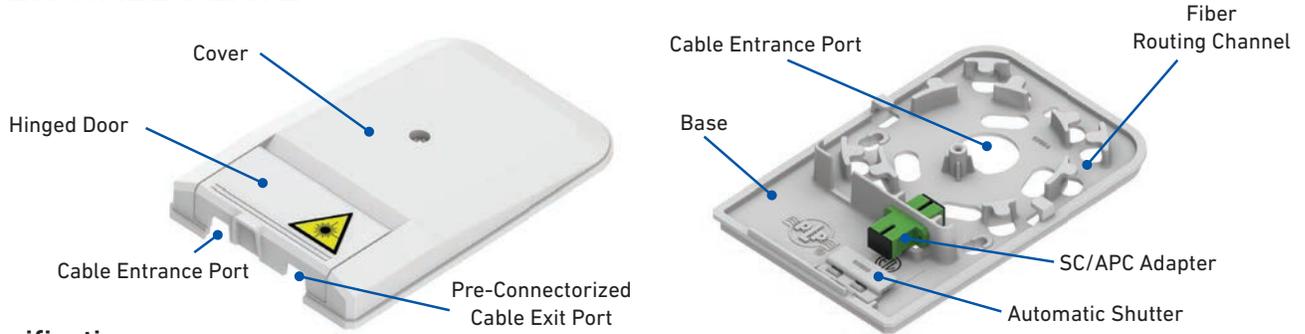


### Specifications

|                                 |  |
|---------------------------------|--|
| Catalog Numbers                 | 8006992W, 8006992IV                    |
| Splice Capacity                 | 0                                      |
| Adapter Port Quantity (Maximum) | 1 SC/APC (provided)                    |
| Colors                          | White and Almond                       |
| Cable Entrance Ports            | (1) Bottom Edge and (1) Back of Base   |
| Size                            | 4" W x 6" L x 1" D (102 x 152 x 25 mm) |

### COYOTE Fiber Wall Plate Kit Contents

| Catalog Numbers | Description  |
|-----------------|--|
| 8006992W        | COYOTE Fiber Wall Plate in White – Includes (1) Base, (1) Cover, (1) SC/APC Factory Installed Adapter and (1) Mounting Hardware Kit  |
| 8006992IV       | COYOTE Fiber Wall Plate in Almond – Includes (1) Base, (1) Cover, (1) SC/APC Factory Installed Adapter and (1) Mounting Hardware Kit |

## SPLICE & STORE FIBER WALL PLATE

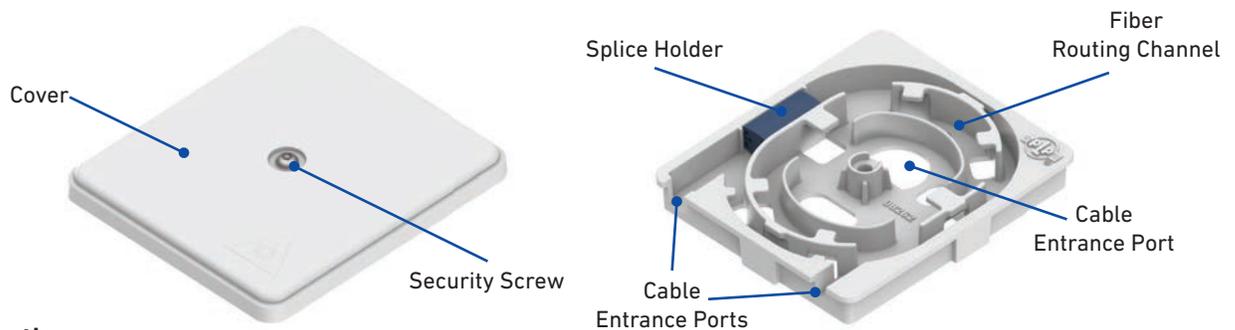


### Specifications

|                                 |   |
|---------------------------------|---|
| Catalog Numbers                 | 80061045                                      |
| Splice Capacity                 | 1   |
| Adapter Port Quantity (Maximum) | 0   |
| Colors                          | White   |
| Cable Entrance Ports            | (2) Bottom Edge and (1) Back of Base          |
| Size                            | 4.5" W x 5.0" L x 0.87" D (114 x 127 x 22 mm) |

### COYOTE Fiber Wall Plate Kit Contents

| Catalog Number | Description   |
|----------------|---|
| 80061045       | COYOTE Splice & Store Fiber Wall Plate in White – Includes (1) Base, (1) Cover, (1) Blue LITE-GRIP® Retention Block, (1) Felt Strip, (2) Tie Wraps and (1) Security Screw |

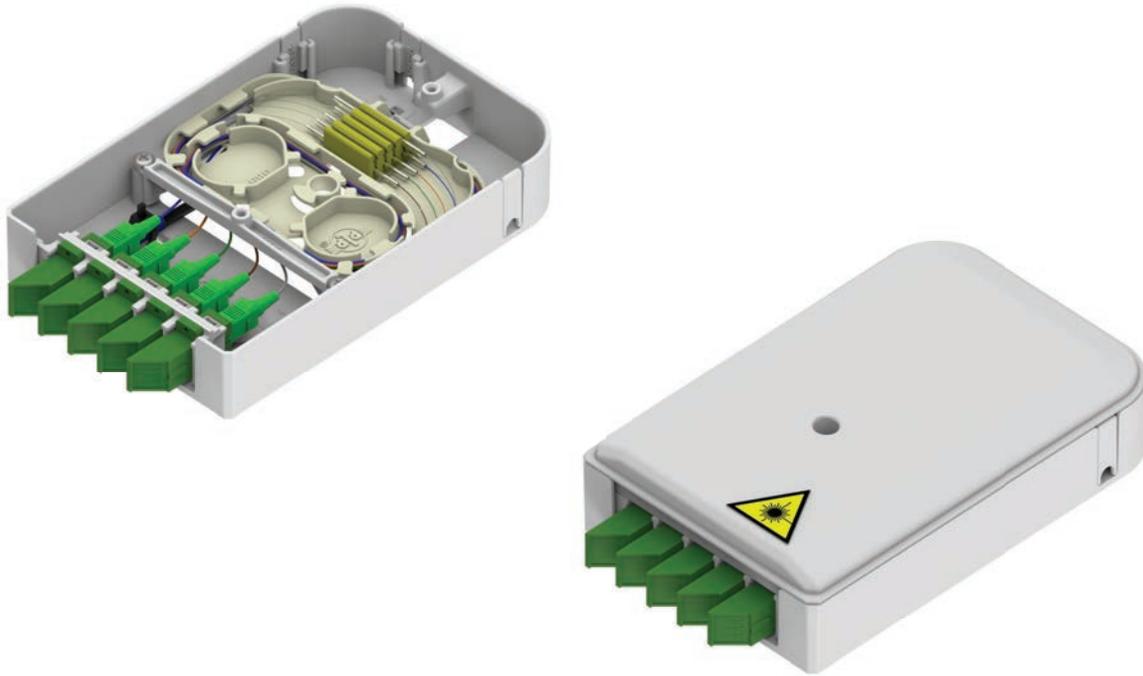


## COYOTE<sup>®</sup> ACE

The **COYOTE ACE (Adaptable Connection Enclosure)** offers the greatest flexibility to address the multitude of connection options required to support home and office networks. Interchangeable inserts allow the enclosure to be configured to support fiber/coax applications, fiber/CAT6 applications, Coax/CAT6 application, coax only applications and fiber only applications. The enclosure can be used in conjunction with the COYOTE Fiber Wall Plates to support additional fiber slack storage or applications requiring 1x4 coax splitters. Each COYOTE ACE is produced from flame retardant compounds.

### FEATURES AND BENEFITS

- Supports splice/patch applications and multiple connection types
- Accepts industry standard adapters and coax splitters
- Fiber entrance slots on side and top of base for surface mount applications using raceway
- Large opening in back wall of base to support transition of fiber or coax when mounted to an electrical outlet box
- Can be combined with the COYOTE Access Solutions™ Fiber Wall Plate to provide additional slack storage or address fiber with coax splitter applications
- Flame retardant

## COYOTE® ACE

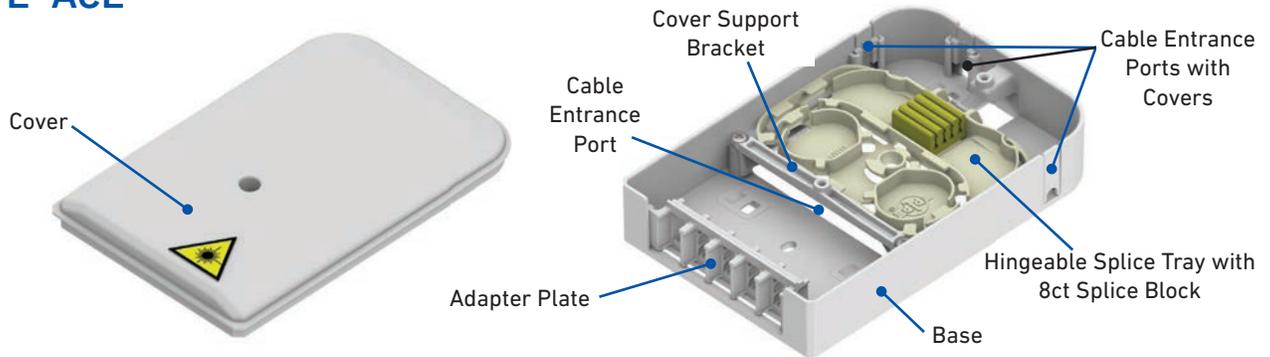

### Specifications

|   |   |
|---|---|
| Catalog Numbers                           | COYACE-001 through COYACE-008   |
| Splice Capacity (Maximum) – Single Fusion | 8   |
| Adapter Port Quantity (Maximum)           | (5) SC, (10) LC, (1) 1x2, 1x3, or 1x4 Coax Splitter, (2) CAT5, CAT6, RJ11, RJ45, or Coax Adapters   |
| Adapter Plate Configurations              | (5) Fiber Adapters, (3) Fiber Adapters and (1) Ethernet or Coax Adapter, (1) Fiber Adapter and (2) Ethernet or Coax Adapter, (1) Fiber Adapter and (1) 1x2 Coax Splitter, (1) Ethernet or Coax Adapter and (1) 1x2 Coax Splitter, or (1) 1x3 or 1x4 Coax Splitter |
| Colors                                    | White   |
| Cable Entrance Ports                      | (1) Top Edge, (1) Left Edge, (1) Right Edge, and (1) Back of Base   |
| Size                                      | 4" W x 6" L x 1" D (102 x 152 x 25 mm)  |


### COYOTE ACE Kit Contents

| Catalog Numbers | Description   |
|-----------------|---|
| COYACE-000      | COYOTE ACE – Includes (1) Base, (1) Cover, (5) Empty Adapter Plates, (3) Port Covers, and Mounting Hardware |
| COYACE-001      | COYOTE ACE – Includes (1) Splice Tray Kit and (2) SC/APC Shuttered Adapters and Pigtailed                   |
| COYACE-002      | COYOTE ACE – Includes (1) Splice Tray Kit and (5) SC/APC Shuttered Adapters and Pigtailed                   |
| COYACE-003      | COYOTE ACE – Includes (1) Splice Tray Kit and (2) SC/UPC Shuttered Adapters and Pigtailed                   |
| COYACE-004      | COYOTE ACE – Includes (1) Splice Tray Kit and (5) SC/UPC Shuttered Adapters and Pigtailed                   |
| COYACE-005      | COYOTE ACE – Includes (1) CAT6 Adapter, (1) Coax Adapter, and (1) SC/APC Shuttered Adapter                  |
| COYACE-006      | COYOTE ACE – Includes (1) Coax Adapter and (1) SC/APC Shuttered Adapter                                     |
| COYACE-007      | COYOTE ACE – Includes (1) SC/APC Shuttered Adapter  |
| COYACE-008      | COYOTE ACE – Includes (1) Splice Tray Kit and (1) SC/APC Shuttered Adapters and Pigtailed                   |

All kits include (1) Base, (1) Cover, (5) Empty Adapter Plates, (3) Port Covers and Mounting Hardware

### COYOTE ACE Accessories

| Catalog Numbers | Description   |
|-----------------|---|
| 8004034         | Splice Tray Kit – Includes (1) Splice Tray and (1) Splice Block |
| 80811215        | Adapter Kit – Includes (2) SC/APC Shuttered Adapters            |
| 80811216        | Adapter Kit – Includes (3) SC/APC Shuttered Adapters            |
| 80813611        | Adapter Kit – Includes (2) LC/APC Shuttered Adapters            |
| 80813612        | Adapter Kit – Includes (3) LC/APC Shuttered Adapters            |
| 800014114       | Adapter Kit – Includes (2) SC/UPC Shuttered Adapters            |
| 800014115       | Adapter Kit – Includes (3) SC/UPC Shuttered Adapters            |
| 80813613        | Adapter Kit – Includes (2) LC/UPC Shuttered Adapters            |
| 80813614        | Adapter Kit – Includes (3) LC/UPC Shuttered Adapters            |
| 800013979       | Pigtail Kit – Includes (2) SC/APC 900 µm Pigtailed              |
| 800013980       | Pigtail Kit – Includes (3) SC/APC 900 µm Pigtailed              |
| 800014109       | Pigtail Kit – Includes (2) SC/UPC 900 µm Pigtailed              |
| 800014110       | Pigtail Kit – Includes (3) SC/UPC 900 µm Pigtailed              |
| 80811135        | CAT6 Jack   |
| 80812152        | Coax Jack   |

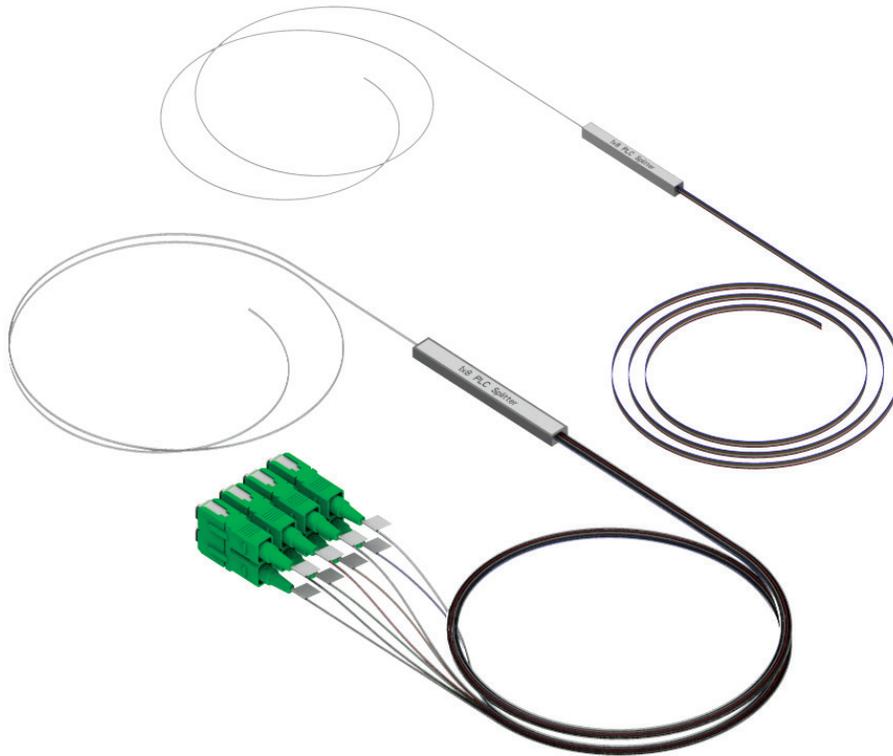

## COYOTE® PASSIVE OPTICAL COMPONENTS

**COYOTE Passive Optical Components** are the essential pieces needed to build a reliable passive optical network. With the use of components such as fiber optic splitters, connectorized pigtaileds, and adapters, a single fiber can provide services to multiple customers at the same time. These components also create a plug and play network that allows services to be redirected or tested without having to break and resplice fibers. COYOTE Passive Optical Components are used with COYOTE Cross-Connect Closures and COYOTE Access Solutions™ Cabinets to ensure protected splicing and connectivity.

### FEATURES AND BENEFITS

- Adapters and connectors are available in SC, LC, FC and ST styles
- Pigtailed kits are available with either 2 mm jacketed or 900 μm color coded fibers
- Field installable connectors can be assembled without a special connector holder
- Bare fiber or connectorized PLC splitters provide split ratios of 1x2, 1x4, 1x8, 1x16, or 1x32

## COYOTE® ADAPTERS




SC/APC Simplex Adapter



LC/UPC Duplex Adapter



SC/APC Duplex Adapter






LC/UPC Quad Adapter

### COYOTE Adapter Kits

| Catalog Number | Description  |
|----------------|--|
| 80813593       | Adapter Kit – Includes (8) SC/APC Simplex Adapters |
| 80813594       | Adapter Kit – Includes (8) SC/UPC Simplex Adapters |
| 80813595       | Adapter Kit – Includes (8) SC/APC Duplex Adapters  |
| 80813596       | Adapter Kit – Includes (8) SC/UPC Duplex Adapters  |
| 80813597       | Adapter Kit – Includes (8) LC/APC Duplex Adapters  |
| 80813598       | Adapter Kit – Includes (8) LC/UPC Duplex Adapters  |
| 80813599       | Adapter Kit – Includes (8) LC/APC Quad Adapters    |
| 80813600       | Adapter Kit – Includes (8) LC/UPC Quad Adapters    |

## COYOTE® ADAPTER MODULES

6-Port SC/UPC  
Adapter Module16-Port LC/APC  
Adapter Module12-Port SC/UPC  
Adapter Module6-Port ST  
Adapter Module

### COYOTE Adapter Module Kits

| Catalog Number | Description   |
|----------------|---|
| 6SCAPC         | Adapter Module Kit – Includes (1) 6-Port SC/APC Adapter Module  |
| 6SMSC          | Adapter Module Kit – Includes (1) 6-Port SC/UPC Adapter Module  |
| 8SCAPC         | Adapter Module Kit – Includes (1) 8-Port SC/APC Adapter Module  |
| 8SMSC          | Adapter Module Kit – Includes (1) 8-Port SC/UPC Adapter Module  |
| 12SMDSCA       | Adapter Module Kit – Includes (1) 12-Port SC/APC Adapter Module |
| 12SMDSC        | Adapter Module Kit – Includes (1) 12-Port SC/UPC Adapter Module |
| 12SMLCA        | Adapter Module Kit – Includes (1) 12-Port LC/APC Adapter Module |
| 12SMLC         | Adapter Module Kit – Includes (1) 12-Port LC/UPC Adapter Module |
| 16SMLCA        | Adapter Module Kit – Includes (1) 16-Port LC/APC Adapter Module |
| 16SMLC         | Adapter Module Kit – Includes (1) 16-Port LC/UPC Adapter Module |
| 24LCAPC        | Adapter Module Kit – Includes (1) 24-Port LC/APC Adapter Module |
| 24SMLC         | Adapter Module Kit – Includes (1) 24-Port LC/UPC Adapter Module |
| 6SMST          | Adapter Module Kit – Includes (1) 6-Port ST Adapter Module      |
| 8SMST          | Adapter Module Kit – Includes (1) 8-Port ST Adapter Module      |
| 12SMST         | Adapter Module Kit – Includes (1) 12-Port ST Adapter Module     |
| 6SMFC          | Adapter Module Kit – Includes (1) 6-Port FC Adapter Module      |
| 8SMFC          | Adapter Module Kit – Includes (1) 8-Port FC Adapter Module      |

## COYOTE® 2 MM JACKETED PIGTAIL KITS – SHORT BOOT CONNECTORS



**2-Pack of 2 mm Jacketed SC/APC Pigtailed with Short Boot Connectors**



**3-Pack of 2 mm Jacketed SC/UPC Pigtailed with Short Boot Connectors**



**4-Pack of 2 mm Jacketed SC/APC Pigtailed with Short Boot Connectors**



**4-Pack of 2 mm Jacketed LC/UPC Pigtailed with Short Boot Connectors**

### Short Boot Connectors

| Catalog Number    | Description  |
|-------------------|--|
| COYTRM-2PK-SCA-SB | Pigtail Kit – Includes (2) SC/APC 2 mm Jacketed Pigtailed with Short Boot Connectors |
| COYTRM-2PK-SCU-SB | Pigtail Kit – Includes (2) SC/UPC 2 mm Jacketed Pigtailed with Short Boot Connectors |
| COYTRM-3PK-SCA-SB | Pigtail Kit – Includes (3) SC/APC 2 mm Jacketed Pigtailed with Short Boot Connectors |
| COYTRM-3PK-SCU-SB | Pigtail Kit – Includes (3) SC/UPC 2 mm Jacketed Pigtailed with Short Boot Connectors |
| COYTRM-4PK-SCA-SB | Pigtail Kit – Includes (4) SC/APC 2 mm Jacketed Pigtailed with Short Boot Connectors |
| COYTRM-4PK-SCU-SB | Pigtail Kit – Includes (4) SC/UPC 2 mm Jacketed Pigtailed with Short Boot Connectors |
| COYTRM-4PK-LCA-SB | Pigtail Kit – Includes (4) LC/APC 2 mm Jacketed Pigtailed with Short Boot Connectors |
| COYTRM-4PK-LCU-SB | Pigtail Kit – Includes (4) LC/UPC 2 mm Jacketed Pigtailed with Short Boot Connectors |

## COYOTE® 2 MM JACKETED PIGTAIL KITS – STANDARD BOOT CONNECTORS



**2-Pack of 2 mm Jacketed SC/UPC Pigtailed with Standard Boot Connectors**



**3-Pack of 2 mm Jacketed SC/APC Pigtailed with Standard Boot Connectors**



**4-Pack of 2 mm Jacketed SC/UPC Pigtailed with Standard Boot Connectors**



**4-Pack of 2 mm Jacketed LC/APC Pigtailed with Standard Boot Connectors**

### Standard Boot Connectors

| Catalog Number | Description   |
|----------------|---|
| COYTRM-2PK-SCA | Pigtail Kit – Includes (2) SC/APC 2 mm Jacketed Pigtailed with Standard Boot Connectors |
| COYTRM-2PK-SCU | Pigtail Kit – Includes (2) SC/UPC 2 mm Jacketed Pigtailed with Standard Boot Connectors |
| COYTRM-3PK-SCA | Pigtail Kit – Includes (3) SC/APC 2 mm Jacketed Pigtailed with Standard Boot Connectors |
| COYTRM-3PK-SCU | Pigtail Kit – Includes (3) SC/UPC 2 mm Jacketed Pigtailed with Standard Boot Connectors |
| COYTRM-4PK-SCA | Pigtail Kit – Includes (4) SC/APC 2 mm Jacketed Pigtailed with Standard Boot Connectors |
| COYTRM-4PK-SCU | Pigtail Kit – Includes (4) SC/UPC 2 mm Jacketed Pigtailed with Standard Boot Connectors |
| COYTRM-4PK-LCA | Pigtail Kit – Includes (4) LC/APC 2 mm Jacketed Pigtailed with Standard Boot Connectors |
| COYTRM-4PK-LCU | Pigtail Kit – Includes (4) LC/UPC 2 mm Jacketed Pigtailed with Standard Boot Connectors |

## COYOTE® FIBER PIGTAIL CABLE ASSEMBLIES



**6-Fiber SC/APC Pigtail  
Cable Assembly**



**12-Fiber SC/UPC Pigtail  
Cable Assembly**



**6-Fiber LC/APC Pigtail  
Cable Assembly**



**12-Fiber ST Pigtail  
Cable Assembly**

### Assembly Kits

| Catalog Number | Description   |
|----------------|---|
| P6SCA3         | 3 m Pigtail Cable Assembly Kit – Includes (6) Bundled SC/APC 900 µm Pigtails in Sleeving  |
| P6SCU3         | 3 m Pigtail Cable Assembly Kit – Includes (6) Bundled SC/UPC 900 µm Pigtails in Sleeving  |
| P12SCA3        | 3 m Pigtail Cable Assembly Kit – Includes (12) Bundled SC/APC 900 µm Pigtails in Sleeving |
| P12SCU3        | 3 m Pigtail Cable Assembly Kit – Includes (12) Bundled SC/UPC 900 µm Pigtails in Sleeving |
| P6LCA3         | 3 m Pigtail Cable Assembly Kit – Includes (6) Bundled LC/APC 900 µm Pigtails in Sleeving  |
| P6LC3          | 3 m Pigtail Cable Assembly Kit – Includes (6) Bundled LC/UPC 900 µm Pigtails in Sleeving  |
| P12LCA3        | 3 m Pigtail Cable Assembly Kit – Includes (12) Bundled LC/APC 900 µm Pigtails in Sleeving |
| P12LC3         | 3 m Pigtail Cable Assembly Kit – Includes (12) Bundled LC/UPC 900 µm Pigtails in Sleeving |
| P6ST3          | 3 m Pigtail Cable Assembly Kit – Includes (6) Bundled ST 900 µm Pigtails in Sleeving      |
| P12ST3         | 3 m Pigtail Cable Assembly Kit – Includes (12) Bundled ST 900 µm Pigtails in Sleeving     |
| P6FC3          | 3 m Pigtail Cable Assembly Kit – Includes (6) Bundled FC 900 µm Pigtails in Sleeving      |
| P12FC3         | 3 m Pigtail Cable Assembly Kit – Includes (12) Bundled FC 900 µm Pigtails in Sleeving     |


## COYOTE® 900 µm FIBER PIGTAIL KITS



**2-Pack of 1.5 Meter SC/APC  
900 µm Color Coded Pigtails**



**3-Pack of 1.5 Meter SC/UPC  
900 µm Color Coded Pigtails**



**4-Pack of 1.5 Meter SC/APC  
900 µm Color Coded Pigtails**



**4-Pack of 1.5 Meter LC/UPC  
900 µm Color Coded Pigtails**

### Fiber Pigtail Kits

| Catalog Number | Description   |
|----------------|---|
| 800013979      | Fiber Pigtail Kit – Includes (2) 1.5 m SC/APC 900 µm Color Coded Pigtails |
| 800014109      | Fiber Pigtail Kit – Includes (2) 1.5 m SC/UPC 900 µm Color Coded Pigtails |
| 800013980      | Fiber Pigtail Kit – Includes (3) 1.5 m SC/APC 900 µm Color Coded Pigtails |
| 800014110      | Fiber Pigtail Kit – Includes (3) 1.5 m SC/UPC 900 µm Color Coded Pigtails |
| 800015055      | Fiber Pigtail Kit – Includes (4) 1.5 m SC/APC 900 µm Color Coded Pigtails |
| 80812558       | Fiber Pigtail Kit – Includes (4) 1.5 m SC/UPC 900 µm Color Coded Pigtails |
| 80812983       | Fiber Pigtail Kit – Includes (2) 1.5 m LC/APC 900 µm Color Coded Pigtails |
| 80812985       | Fiber Pigtail Kit – Includes (2) 1.5 m LC/UPC 900 µm Color Coded Pigtails |
| 80812559       | Fiber Pigtail Kit – Includes (4) 1.5 m LC/APC 900 µm Color Coded Pigtails |
| 80812560       | Fiber Pigtail Kit – Includes (4) 1.5 m LC/UPC 900 µm Color Coded Pigtails |

## COYOTE® FIELD INSTALLABLE CONNECTORS



**SC/APC Field Installable Connectors**



**SC/UPC Field Installable Connectors**



**LC/APC Field Installable Connectors**



**LC/UPC Field Installable Connectors**

### Specifications

| Item               | Performance   |
|--------------------|---|
| Standard           | TIA / EIA 604-3 (SC) and TIA / EIA 604-10 (LC)            |
| Insertion Loss     | Typ. 0.3dB / Max. 0.5dB                                   |
| Return Loss        | Typ. 50dB / Max. 55dB (PC)<br>Typ. 55dB / Max. 60dB (APC) |
| Endurance          | ≤ 0.3dB, 500 times reconnection                           |
| Tension            | ≤ 0.2dB change, 3.0kg                                     |
| Temperature Change | ≤ 0.3dB change, 21 times / -40°C~ +75°C                   |

### COYOTE Field Installable Connector Kits for 250 μm and 900 μm Cable Types

| Catalog Number | Description   |
|----------------|---|
| 80813501       | Field Installable Connector Kit – Includes (6) SC/APC Field Installable Connectors  |
| 80813502       | Field Installable Connector Kit – Includes (12) SC/APC Field Installable Connectors   |
| 80813503       | Field Installable Connector Kit – Includes (6) SC/UPC Field Installable Connectors  |
| 80813504       | Field Installable Connector Kit – Includes (12) SC/UPC Field Installable Connectors   |
| 80813505       | Field Installable Connector Kit – Includes (6) LC/APC Field Installable Connectors  |
| 80813506       | Field Installable Connector Kit – Includes (12) LC/APC Field Installable Connectors   |
| 80813507       | Field Installable Connector Kit – Includes (6) LC/UPC Field Installable Connectors  |
| 80813508       | Field Installable Connector Kit – Includes (12) LC/UPC Field Installable Connectors   |
| FAC-KIT        | Field Installation Kit – Includes (1) Carrying Bag, (1) Precision Cleaver, (1) Pen Style Cleaner for SC Connectors, (1) Pen Style Cleaner for LC Connectors, (1) Fiber Stripper, (1) Kevlar® Scissor, (1) Pack of Alcohol Wipes, (10) LC/UPC 900 μm Connectors, (10) SC/UPC 900 μm Connectors and Instruction Sheet |

# COYOTE® PLC SPLITTERS



## COYOTE Bare Fiber Splitters

| Catalog Number | Description                       |
|----------------|-----------------------------------|
| COYSP1X2       | COYOTE Bare Fiber Splitter – 1x2  |
| COYSP1X4       | COYOTE Bare Fiber Splitter – 1x4  |
| COYSP1X8       | COYOTE Bare Fiber Splitter – 1x8  |
| COYSP1X16      | COYOTE Bare Fiber Splitter – 1x16 |
| COYSP1X32      | COYOTE Bare Fiber Splitter – 1x32 |

Add Suffix: -S for 250um Output Legs

## COYOTE Pre-Connectorized Splitters


| Catalog Number | Description                                     |
|----------------|---|
| COYSP1X2SCA    | COYOTE Pre-Connectorized Splitter – 1x2 SC/APC  |
| COYSP1X4SCA    | COYOTE Pre-Connectorized Splitter – 1x4 SC/APC  |
| COYSP1X8SCA    | COYOTE Pre-Connectorized Splitter – 1x8 SC/APC  |
| COYSP1X16SCA   | COYOTE Pre-Connectorized Splitter – 1x16 SC/APC |
| COYSP1X32SCA   | COYOTE Pre-Connectorized Splitter – 1x32 SC/APC |


## Specifications: Bare Fiber and Pre-Connectorized Splitters

|                            | Units | 1x2  | 1x4  | 1x8  | 1x16   | 1x32   |
|----------------------------|-------|--|--|--|--|--|
| Operating Wavelength       | nm    | 1260 – 1650  | 1260 – 1650                                    | 1260 – 1650                                      | 1260 – 1650                                      | 1260 – 1650                                      |
| Insertion Loss (Maximum)   | dB    | 3.6 <sup>1</sup>   | 7.2 <sup>1</sup>                               | 10.5 <sup>1</sup>                                | 13.5 <sup>1</sup>                                | 16.5 <sup>1</sup>                                |
|                            |       | Max. 4.0 <sup>2</sup><br>Typ. 3.6 <sup>2</sup>                                 | Max. 8.0 <sup>2</sup><br>Typ. 7.7 <sup>2</sup> | Max. 11.5 <sup>2</sup><br>Typ. 11.0 <sup>2</sup> | Max. 14.5 <sup>2</sup><br>Typ. 14.2 <sup>2</sup> | Max. 17.5 <sup>2</sup><br>Typ. 17.2 <sup>2</sup> |
| Uniformity (Maximum)       | dB    | 0.4 <sup>1</sup>   | 0.6 <sup>1</sup>                               | 0.8 <sup>1</sup>                                 | 1.2 <sup>1</sup>                                 | 1.7 <sup>1</sup>                                 |
| PDL (Maximum)              | dB    | 0.2 <sup>1</sup>   | 0.2 <sup>1</sup>                               | 0.3 <sup>1</sup>                                 | 0.3 <sup>1</sup>                                 | 0.3 <sup>1</sup>                                 |
| Return Loss (Minimum)      | dB    | 55.0 <sup>1</sup>  | 55.0 <sup>1</sup>                              | 55.0 <sup>1</sup>                                | 55.0 <sup>1</sup>                                | 55.0 <sup>1</sup>                                |
| Directivity (Minimum)      | dB    | 55.0   | 55.0   | 55.0   | 55.0   | 55.0   |
| Operating Temperature      | °C    | -40 to +85   | -40 to +85                                     | -40 to +85                                       | -40 to +85                                       | -40 to +85                                       |
| Input/Output Legs          | m     | 1 (Standard) or Custom Length Available<br>(Input/250 µm, Output/Ribbon fiber) |  |  |  |  |
| Dimensions – Bare Fiber    | mm    | 40 L x 4 W x 4 H   | 40 L x 4 W x 4 H                               | 40 L x 4 W x 4 H                                 | 40 L x 4 W x 4 H                                 | 50 L x 7 W x 4 H                                 |
| Dimensions – Connectorized | mm    | 60 L x 7 W x 4 H   | 60 L x 7 W x 4 H                               | 60 L x 7 W x 4 H                                 | 60 L x 12 W x 5 H                                | 80 L x 20 W x 6 H                                |

<sup>1</sup>Excluding WDL (Wavelength Dependant Loss) and TDL (Temperature Dependant Loss). Measured at room temp.1310 nm and 1550 nm.

<sup>2</sup>Including WDL and TDL. 1 x 2 FBT Splitters and 1 x 64 PLC Splitter Modules are available upon request.

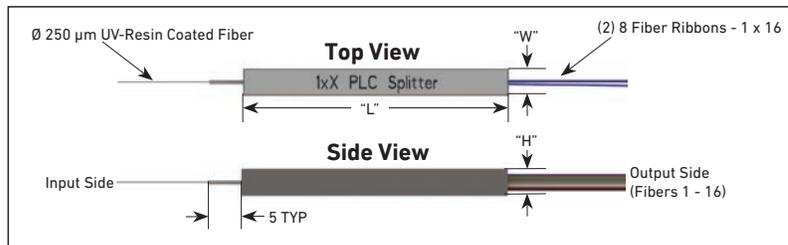

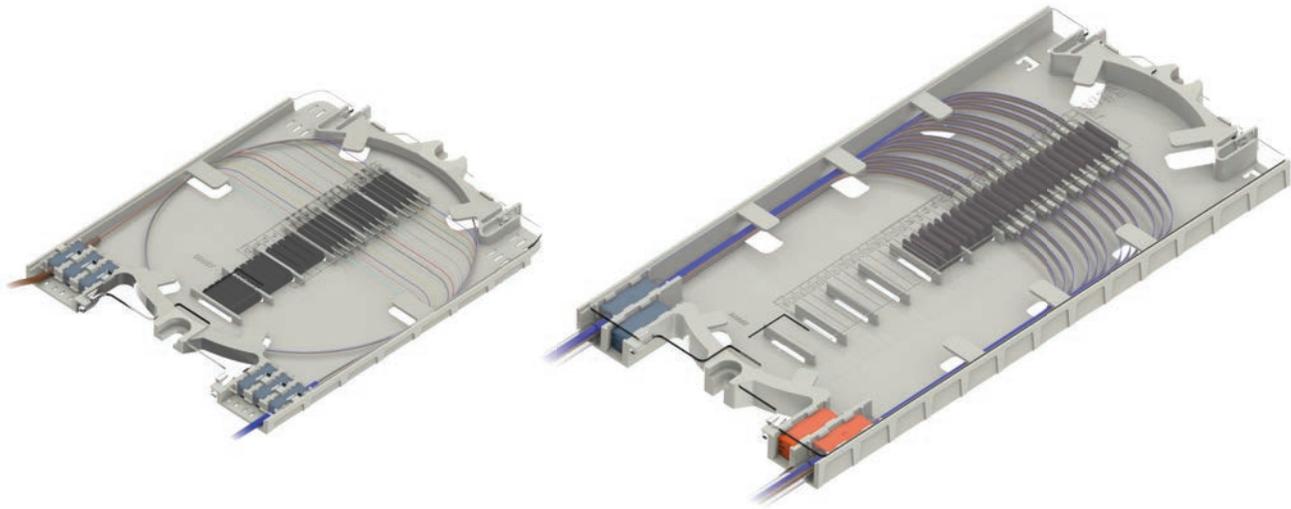

## COYOTE® SPLICE TRAYS

**COYOTE Splice Trays** are necessary components within most COYOTE fiber optic closures to manage, store, and protect fibers and splices. COYOTE splice trays are injection molded and have hinged, clear plastic covers to protect and allow for visible inspection of the fibers. They are available in Legacy and LITE-GRIP® styles, each providing unique features and benefits to best fit the fiber management and splice capacity requirements of the closure. Both splice tray styles come in short and long versions for either single fusion or mass fusion/ribbon splicing. Short splice trays are used in the COYOTE In-Line RUNT, ONE, Terminal Closures, 6.5" x 17" Dome Closure, 9.5" x 19" Dome Closure, and COYOTE GLC 17". Long splice trays are used in the COYOTE 6.5" x 22" Dome Closure, 9.5" x 28" Dome Closure, and COYOTE GLC 28".

### FEATURES AND BENEFITS

#### Legacy Splice Tray

- Routing channels allow fibers to enter the splice tray at the same entrance point, allowing buffer tubes and transportation tubes to coil easy within the closure
- Buffer tubes or transportation tubes are secured to the splice trays with felt and tie wraps
- Available in low profile, standard, and deep profile heights to achieve the desired splice count within the closure

#### LITE-GRIP Splice Tray

- Routing channels of the splice tray accept LITE-GRIP Retention Sleeves that are designed to grip buffer tubes, pigtailed, or transportation tubing without the possibility of attenuation during installation and eliminates the need for tie wraps, reducing installation time
- Removable splice blocks provide the flexibility to interchange splice blocks to store single fusion splices, mass fusion/ribbon splices, mechanical splices, or PLC splitters on the same splice tray
- Available in low profile, standard, and deep profile heights to achieve the desired splice count within the closure

## COYOTE® LEGACY SHORT SPLICE TRAY KITS



COYOTE Legacy Short Low Profile Splice Tray Kit for Single Fusion Splices  
(12 Splice CT.)

**Catalog Number: 80807701**



COYOTE Legacy Short Standard Profile Splice Tray Kit for Single Fusion Splices  
(12 Splice CT.)


**Catalog Number: 80806033**



COYOTE Legacy Short Deep Profile Splice Tray Kit for Ribbon/Mass Fusion Splices  
(72 Splice CT.)

**Catalog Number: 80807114**

## COYOTE® LITE-GRIP® SHORT SPLICE TRAY KITS

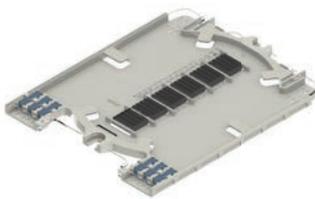


COYOTE LITE-GRIP Short Low Profile Splice Tray Kit for Single Fusion Splices  
(24 Splice CT.)

**Catalog Number: 80809958**




COYOTE LITE-GRIP Short Low Profile Splice Tray Kit for Single Fusion Splices  
(36 Splice CT.)

**Catalog Number: 80813152**

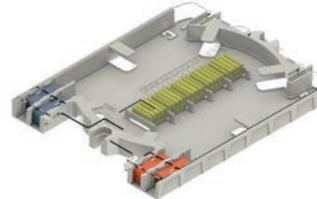

COYOTE LITE-GRIP Short Deep Profile Splice Tray Kit for Double Stacked Single Fusion Splices  
(40 Splice CT.)


**Catalog Number: 80808945**

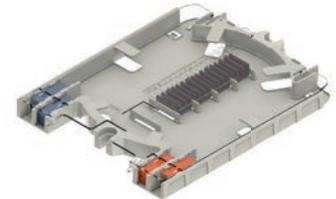

COYOTE LITE-GRIP Short Deep Profile Splice Tray Kit for Ribbon/Mass Fusion Splices  
(144 Splice CT.)


**Catalog Number: LGSTR144**

## COYOTE® LITE-GRIP® SHORT SPLITTER TRAY KITS

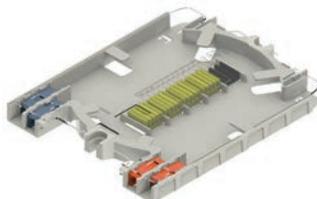


COYOTE LITE-GRIP Short Deep Profile Splice Tray Kit for Single Fusion Splices, Bare Fiber Splitters, & 1x4 Pre-Connectorized Splitters  
(32 Splice CT.)

**Catalog Number: LGSTS-SPLIT**

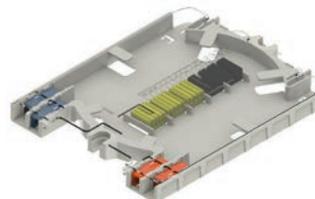

COYOTE LITE-GRIP Short Deep Profile Splice Tray Kit for Single Fusion Splices, 1x8 Pre-Connectorized Splitters, & 1x16 Pre-Connectorized Splitters  
(32 Splice CT.)

**Catalog Number: LGSTS1x816PC**

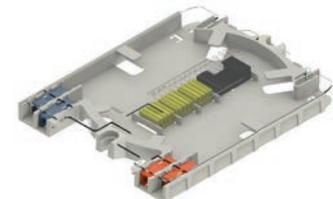

COYOTE LITE-GRIP Short Deep Profile Splice Tray Kit for Single Fusion Splices & 1x32 Pre-Connectorized Splitters  
(24 Splice CT.)

**Catalog Number: LGSTS1x32PC**



## COYOTE® LEGACY LONG SPLICE TRAY KITS



COYOTE Legacy Long Low Profile Splice Tray Kit for Single Fusion Splices (36 Splice CT.)  
**Catalog Number: 8001127**




COYOTE Legacy Long Standard Profile Splice Tray Kit for Single Fusion Splices (36 Splice CT.)  
**Catalog Number: 80805514**




COYOTE Legacy Long Deep Profile Splice Tray Kit for Ribbon/Mass Fusion Splices (144 Splice CT.)  
**Catalog Number: 80805515**


## COYOTE® LITE-GRIP® LONG SPLICE TRAY KITS

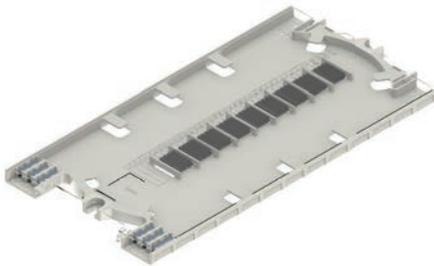

COYOTE LITE-GRIP Long Standard Profile Splice Tray Kit for Single Fusion Splices (36 Splice CT.)  
**Catalog Number: 80810086**

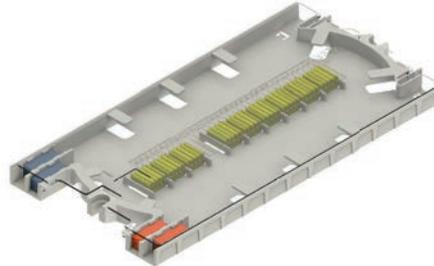


COYOTE LITE-GRIP Long Deep Profile Splice Tray Kit for Double Stacked Single Fusion Splices (72 Splice CT.)  
**Catalog Number LGSTS72**

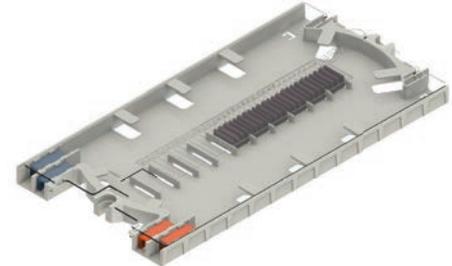


COYOTE LITE-GRIP Long Deep Profile Splice Tray Kit for Ribbon/Mass Fusion Splices (216 Splice CT.)  
**Catalog Number: LGSTR216**


## COYOTE® LITE-GRIP® LONG SPLITTER TRAY KITS

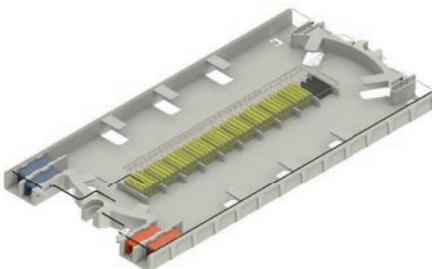

COYOTE LITE-GRIP Long Deep Profile Splice Tray Kit for Single Fusion Splices, Bare Fiber Splitters, & 1x4 Pre-Connectorized Splitters (72 Splice CT.)  
**Catalog Number: LGSTL-SPLIT**

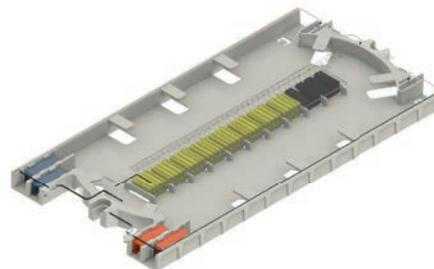

COYOTE LITE-GRIP Long Deep Profile Splice Tray Kit for Single Fusion Splices, 1x8 Pre-Connectorized Splitters, & 1x16 Pre-Connectorized Splitters (64 Splice CT.)  
**Catalog Number: 800013831**

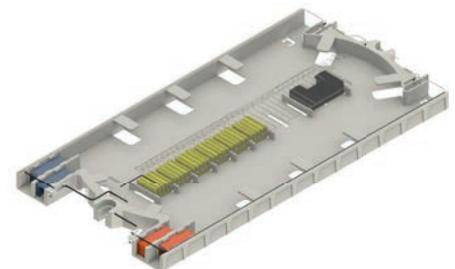

COYOTE LITE-GRIP Long Deep Profile Splice Tray Kit for Single Fusion Splices & 1x32 Pre-Connectorized Splitters (48 Splice CT.)  
**Catalog Number: LGSTL1x32PC**

## ACCESSORIES



**LITE-GRIP 4 CT. Low Profile Splice Block for Single Fusion Splices (Black)**



**LITE-GRIP 8 CT. Splice Block for Single Fusion Splices (Yellow)**



**LITE-GRIP 36 CT. Splice Block for Ribbon/Mass Fusion Splices (Purple)**




**Elastomeric 12 CT. Splice Block for Single or Ribbon/Mass Fusion Splices (Light Blue)**



**LITE-GRIP 1-Hole Retention Sleeve (Blue)**



**LITE-GRIP 1-Hole Retention Sleeve (Orange)**



**LITE-GRIP 6-Hole Retention Sleeve (Blue)**



**LITE-GRIP 6-Hole Retention Sleeve (Orange)**



**LITE-GRIP 6-Hole Retention Sleeve (Green)**



**LITE-GRIP Ribbon Manager (Blue)**



**LITE-GRIP Ribbon Manager (Orange)**



**40 mm Heat Shrink Splice Protector - Single Fusion**



**60 mm Heat Shrink Splice Protector - Single Fusion**



**40 mm Heat Shrink Splice Protector - Mass Fusion**

### COYOTE Splice Tray Accessory Kits

| Catalog Number | Description   |
|----------------|---|
| LGSBS4-5       | Splice Block Kit – Includes (5) LITE-GRIP® Low Profile 4 CT. Single Fusion Splice Blocks, Black |
| LGSBS8-5       | Splice Block Kit – Includes (5) LITE-GRIP 8 CT. Single Fusion Splice Blocks, Yellow             |
| LGSBS8-50      | Splice Block Kit – Includes (50) LITE-GRIP 8 CT. Single Fusion Splice Blocks, Yellow            |
| LGSBR3-5       | Splice Block Kit – Includes (5) LITE-GRIP 36 CT. Mass Fusion Splice Blocks, Purple              |
| LGSBR3-50      | Splice Block Kit – Includes (50) LITE-GRIP 36 CT. Mass Fusion Splice Blocks, Purple             |
| 8003381        | Splice Block Kit – Includes (3) 12 CT. Elastomeric Single Fusion Splice Blocks, Light Blue      |
| LGRS1-25B      | Retention Sleeve Kit – Includes (25) LITE-GRIP 1-Hole Retention Sleeve, Blue                    |
| LGRS1-25OR     | Retention Sleeve Kit – Includes (25) LITE-GRIP 1-Hole Retention Sleeve, Orange                  |
| LGRS6-25B      | Retention Sleeve Kit – Includes (25) LITE-GRIP 6-Hole Retention Sleeve, Blue                    |
| LGRS6-25OR     | Retention Sleeve Kit – Includes (25) LITE-GRIP 6-Hole Retention Sleeve, Orange                  |
| LGRS6-25G      | Retention Sleeve Kit – Includes (25) LITE-GRIP 6-Hole Retention Sleeve, Green                   |
| LGRSF2-25      | Retention Sleeve Kit - Includes (25) 2-Slot Foam Microtube Retention Sleeve, Black              |
| LGRO-25B       | Ribbon Manager Kit – Includes (25) LITE-GRIP Ribbon Managers, Blue                              |
| LGRO-25OR      | Ribbon Manager Kit – Includes (25) LITE-GRIP Ribbon Managers, Orange                            |
| 80808187       | Heat Shrink Splice Protector Kit – Includes (12) 40 mm Single Fusion                            |
| 8004095        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Single Fusion                            |
| 8003509        | Heat Shrink Splice Protector Kit – Includes (12) 60 mm Single Fusion                            |
| 8003717        | Heat Shrink Splice Protector Kit – Includes (50) 60 mm Single Fusion                            |
| 8003993        | Heat Shrink Splice Protector Kit – Includes (12) 40 mm Mass Fusion                              |
| 8004160        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Mass Fusion                              |
| 8003490        | Felt Tape Kit – Includes (6) Buffer Tube Felt Strips  |
| 80808613       | Express Fiber Storage Ring – For Deep Profile LITE-GRIP Splice Trays ONLY                       |



## COYOTE® SHORT SPLICE TRAY CAPACITIES FOR COYOTE® CLOSURES

| COYOTE Short Splice Trays   | COYOTE Closures   |                   |                   |                   |                   |                    |                    |                   |                   |                   |                    |                   |                   |          |
|---|-------------------|-------------------|-------------------|-------------------|-------------------|--------------------|--------------------|-------------------|-------------------|-------------------|--------------------|-------------------|-------------------|----------|
|   | Organizer Type    | In-Line RUNT      | ONE               |                   | 6.5" x 17" Dome   |                    | 9.5" x 19" Dome    |                   | Terminal Closure  |                   | 9.5" x 17" GLC     |                   |                   |          |
|   |                   |                   | Buffer Tube       | Universal         | Buffer Tube       | Unitube/Ribbon     | Buffer Tube        | Unitube/Ribbon    | Single Chamber    | Dual Chamber      | Universal          | Max. Tray         | Cross-Connect     | OptiTap® |
| <b>Single Fusion Splice Trays (Listed from Lowest to Highest Splice CT.)</b>  |                   |                   |                   |                   |                   |                    |                    |                   |                   |                   |                    |                   |                   |          |
| <br>Cat. No. 80806033<br>(12 Splice CT.)    | 2 Trays (24 CT.)  | 3 Trays (36 CT.)  | 3 Trays (36 CT.)  | 4 Trays (48 CT.)  | 4 Trays (48 CT.)  | 9 Trays (108 CT.)  | 8 Trays (96 CT.)   | 2 Trays (24 CT.)  | 4 Trays (48 CT.)  | 3 Trays (36 CT.)  | 8 Trays (96 CT.)   | 3 Trays (36 CT.)  | 3 Trays (36 CT.)  |          |
| <br>Cat. No. 80807701<br>(12 Splice CT.)    | 4 Trays (48 CT.)  | 4 Trays (48 CT.)  | 3 Trays (36 CT.)  | 6 Trays (72 CT.)  | 6 Trays (72 CT.)  | 12 Trays (144 CT.) | 12 Trays (144 CT.) | 4 Trays (48 CT.)  | 8 Trays (96 CT.)  | 4 Trays (48 CT.)  | 13 Trays (156 CT.) | 4 Trays (48 CT.)  | 4 Trays (48 CT.)  |          |
| <br>Cat. No. 80808945<br>(40 Splice CT.)    | 2 Trays (80 CT.)  | 2 Trays (80 CT.)  | 2 Trays (80 CT.)  | 3 Trays (120 CT.) | 3 Trays (120 CT.) | 6 Trays (240 CT.)  | 6 Trays (240 CT.)  | 2 Trays (80 CT.)  | 4 Trays (160 CT.) | 2 Trays (80 CT.)  | 6 Trays (240 CT.)  | 2 Trays (80 CT.)  | 2 Trays (80 CT.)  |          |
| <br>Cat. No. 80809958<br>(24 Splice CT.)  | 4 Trays (96 CT.)  | 4 Trays (96 CT.)  | 3 Trays (72 CT.)  | 6 Trays (144 CT.) | 6 Trays (144 CT.) | 12 Trays (288 CT.) | 12 Trays (288 CT.) | 4 Trays (96 CT.)  | 8 Trays (192 CT.) | 4 Trays (96 CT.)  | 13 Trays (312 CT.) | 4 Trays (96 CT.)  | 4 Trays (96 CT.)  |          |
| <br>Cat. No. 80813152<br>(36 Splice CT.)  | 4 Trays (144 CT.) | 4 Trays (144 CT.) | 3 Trays (108 CT.) | 6 Trays (216 CT.) | 6 Trays (216 CT.) | 12 Trays (432 CT.) | 12 Trays (432 CT.) | 4 Trays (144 CT.) | 8 Trays (288 CT.) | 4 Trays (144 CT.) | 13 Trays (468 CT.) | 4 Trays (144 CT.) | 4 Trays (144 CT.) |          |
| <b>Ribbon/Mass Fusion Splice Trays (Listed from Lowest to Highest Splice CT.)</b>   |                   |                   |                   |                   |                   |                    |                    |                   |                   |                   |                    |                   |                   |          |
| <br>Cat. No. 80807114<br>(72 Splice CT.)  | 2 Trays (144 CT.) | N/A               | 2 Trays (144 CT.) | N/A               | 3 Trays (216 CT.) | N/A                | 6 Trays (432 CT.)  | 2 Trays (144 CT.) | 4 Trays (288 CT.) | 2 Trays (144 CT.) | N/A                | 2 Trays (144 CT.) | 2 Trays (144 CT.) |          |
| <br>Cat. No. LGSTR144<br>(144 Splice CT.) | 2 Trays (288 CT.) | N/A               | 2 Trays (288 CT.) | N/A               | 3 Trays (432 CT.) | N/A                | 6 Trays (864 CT.)  | 2 Trays (288 CT.) | 4 Trays (576 CT.) | 2 Trays (288 CT.) | N/A                | 2 Trays (288 CT.) | 2 Trays (288 CT.) |          |

## COYOTE® LONG SPLICE TRAY CAPACITIES FOR COYOTE® CLOSURES

| COYOTE Long Splice Trays   | COYOTE Closures      |                      |                       |                       |                        |                      |                       |                      |
|--|----------------------|----------------------|-----------------------|-----------------------|------------------------|----------------------|-----------------------|----------------------|
|  | 6.5" x 22" Dome      |                      | 9.5" x 28" Dome       |                       |                        | 9.5" x 28" GLC       |                       |                      |
|  | Buffer Tube          | Unitube/<br>Ribbon   | Buffer Tube           | Unitube/<br>Ribbon    | Max. Tray              | Universal            | Max. Tray             | Cross-Connect        |
| <b>Single Fusion Splice Trays (Listed from Lowest to Highest Splice CT.)</b>   |                      |                      |                       |                       |                        |                      |                       |                      |
| <br>Cat. No. 80805514<br>(36 Splice CT.)    | 4 Trays<br>(144 CT.) | 4 Trays<br>(144 CT.) | 10 Trays<br>(360 CT.) | 11 Trays<br>(396 CT.) | 15 Trays<br>(540 CT.)  | 5 Trays<br>(180 CT.) | 9 Trays<br>(324 CT.)  | 5 Trays<br>(180 CT.) |
| <br>Cat. No. 80810086<br>(36 Splice CT.)    | 4 Trays<br>(144 CT.) | 4 Trays<br>(144 CT.) | 10 Trays<br>(360 CT.) | 11 Trays<br>(396 CT.) | 15 Trays<br>(540 CT.)  | 5 Trays<br>(180 CT.) | 9 Trays<br>(324 CT.)  | 5 Trays<br>(180 CT.) |
| <br>Cat. No. 8001127<br>(36 Splice CT.)     | 6 Trays<br>(216 CT.) | 6 Trays<br>(216 CT.) | 12 Trays<br>(432 CT.) | 16 Trays<br>(576 CT.) | 20 Trays<br>(720 CT.)  | 8 Trays<br>(288 CT.) | 12 Trays<br>(432 CT.) | 8 Trays<br>(288 CT.) |
| <br>Cat. No. LGSTS72<br>(72 Splice CT.)   | 3 Trays<br>(216 CT.) | 3 Trays<br>(216 CT.) | 6 Trays<br>(432 CT.)  | 8 Trays<br>(576 CT.)  | 10 Trays<br>(720 CT.)  | 4 Trays<br>(288 CT.) | 6 Trays<br>(432 CT.)  | 4 Trays<br>(288 CT.) |
| <b>Ribbon/Mass Fusion Splice Trays (Listed from Lowest to Highest Splice CT.)</b>  |                      |                      |                       |                       |                        |                      |                       |                      |
| <br>Cat. No. 80805515<br>(144 Splice CT.) | N/A                  | 3 Trays<br>(432 CT.) | N/A                   | 8 Trays<br>(1152 CT.) | 10 Trays<br>(1440 CT.) | 4 Trays<br>(576 CT.) | N/A                   | N/A                  |
| <br>Cat. No. LGSTR216<br>(216 Splice CT.) | N/A                  | 3 Trays<br>(648 CT.) | N/A                   | 8 Trays<br>(1728 CT.) | 10 Trays<br>(2160 CT.) | 4 Trays<br>(864 CT.) | N/A                   | N/A                  |


## SLEEVING AND TUBING KITS FOR CABLE MANAGEMENT

The COYOTE closures are designed to manage a variety of fiber optic cable types.

Buffered ribbon cables are stored and routed in the side storage brackets or buffer tube brackets of the organizer. Cables with pliable subunits can take advantage of the large bend radius created by these side storage brackets and store expressed subunits without having to be concerned about tube fatigue. In addition, this style of tube can be routed directly to the splice trays. Rigid tubes need to be broken out and transitioned to the splice trays. This can be accomplished with either expandable braided sleeving or split braided wrap.


### Expandable Braided Sleeving

Ideal for cut cable applications

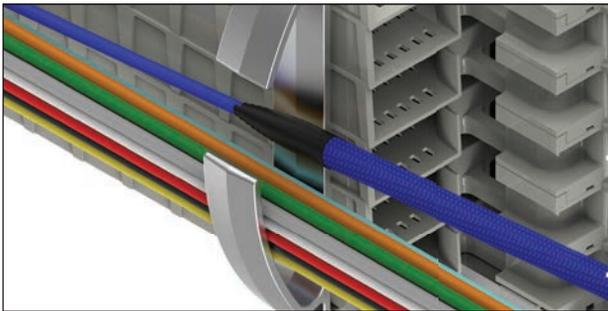


### Split Braided Wrap

Ideal for expressed cable applications

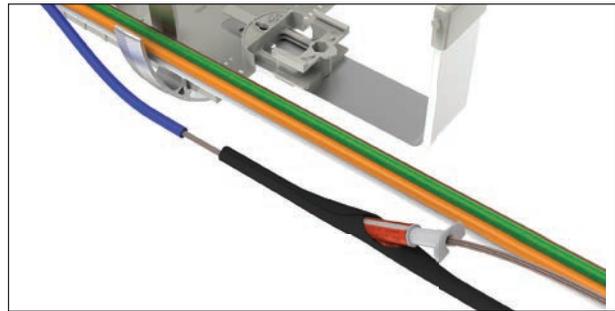


If needed, the Wire Loom Insertion Tool (**Catalog Number: 80813518**) can be used to install the split braided wrap onto the bare fibers/ribbons.


## COYOTE® SPLIT BRAIDED WRAP

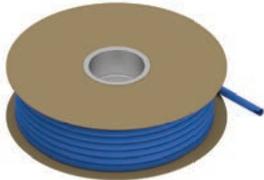


100' Spool of Split Braided Wrap – Blue  
**Catalog Number: 8004174**

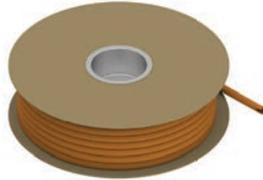


100' Spool of Split Braided Wrap – Orange  
**Catalog Number: 8004175**

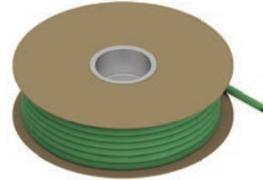


100' Spool of Split Braided Wrap – Green  
**Catalog Number: 8004176**

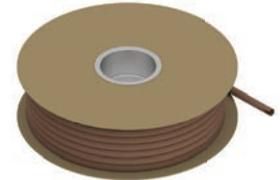


100' Spool of Split Braided Wrap – Brown  
**Catalog Number: 8004177**

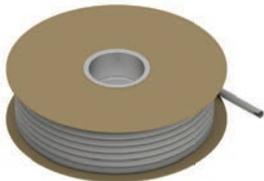

100' Spool of Split Braided Wrap – Slate  
**Catalog Number: 8004174**

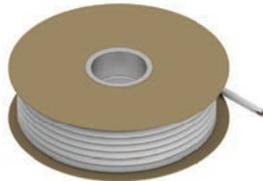

100' Spool of Split Braided Wrap – White  
**Catalog Number: 8004167**

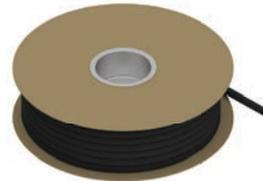

100' Spool of Split Braided Wrap – Black  
**Catalog Number: 8004168**



Wire Loom Insertion Tool  
**Catalog Number: 80813518**

## COYOTE® TUBING AND SLEEVING KITS



Transport Tubing – 0.25" ID



Spiral Tubing – 0.50" ID



Braided Expandable Sleeving –  
3/8" Diameter



Split Braided Wrap –  
3/8" Diameter

### COYOTE Tubing and Sleeving Kits

| Catalog Number | Description  |
|----------------|--|
| 80805293       | Tubing Kit – Includes (6) 0.135" ID x 35" Long Tubes   |
| 8003176        | Tubing Kit – Includes (8) 0.135" ID x 35" Long Tubes   |
| 80806439       | Tubing Kit – Includes (6) 0.170" ID x 35" Long Tubes   |
| 80812618       | Tubing Kit – Includes (4) 0.25" ID x 25" Long Tubes  |
| 80813227       | Tubing Kit – Includes (6) 0.25" ID x 36" Long Tubes  |
| 8003280        | Tubing Kit – Includes (1) 0.135" ID x 25" Long Tube, (1) 0.170" ID x 25" Long Tube and (1) 0.25" ID x 25" Long Tube  |
| 80807989       | 100' Roll of 0.17" ID Tubing   |
| 80807991       | 100' Roll of 0.25" ID Tubing   |
| 80812881       | 100' Roll of 0.50" ID Spiral Wrap Tubing   |
| 8004154        | 125' Spool of Braided Expandable Sleeving, 3/8" Diameter, Blue   |
| 8004155        | 125' Spool of Braided Expandable Sleeving, 3/8" Diameter, Orange   |
| 8004156        | 125' Spool of Braided Expandable Sleeving, 3/8" Diameter, Green  |
| 8004157        | 125' Spool of Braided Expandable Sleeving, 3/8" Diameter, Brown  |
| 8004158        | 125' Spool of Braided Expandable Sleeving, 3/8" Diameter, Slate  |
| 8004159        | 125' Spool of Braided Expandable Sleeving, 3/8" Diameter, White  |
| 8004206        | 125' Spool of Braided Expandable Sleeving, 3/8" Diameter, Red  |
| 8004207        | 125' Spool of Braided Expandable Sleeving, 3/8" Diameter, Black  |
| 8004044        | 125' Spool of Braided Expandable Sleeving, 3/8" Diameter, Yellow   |
| 8004208        | 125' Spool of Braided Expandable Sleeving, 3/8" Diameter, Violet   |
| 8004209        | 125' Spool of Braided Expandable Sleeving, 3/8" Diameter, Rose   |
| 8004210        | 125' Spool of Braided Expandable Sleeving, 3/8" Diameter, Aqua   |
| 80813680       | Braided Expandable Sleeving Kit – Includes (6) 125' Spools of Braided Expandable Sleeving: Blue, Orange, Green, Brown, Slate, White  |
| 80813928       | Braided Expandable Sleeving Kit – Includes (6) 125' Spools of Braided Expandable Sleeving: Red, Black, Yellow, Violet, Rose, Aqua  |
| 80813929       | Braided Expandable Sleeving Kit – Includes (12) 125' Spools of Braided Expandable Sleeving: Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |



## COYOTE® SILICONE GROMMETS

**COYOTE Silicone Grommets** are manufactured from a weather-resistant silicone material that is designed to ensure a tight seal around various cable diameters and styles. They are available in single hole and multi-hole designs which can be slit to accommodate terminated or expressed cables without degrading the integrity of the seal. COYOTE Silicone Grommets are interchangeable throughout all of the COYOTE fiber optic closures and provide the ability for these closures to be re-entered and re-used.

### FEATURES AND BENEFITS

- Single and multi-hole designs available to cover cable diameter ranges from 0.093" – 1.25" (2.4 – 31.8 mm)
- Multi-hole designs allow for increased cable or drop capacity without the need to buy additional cable sealing and restraint kits
- Silicone grommet can be slit per the application procedure to accommodate terminated or expressed cables
- Eliminates the need for scuffing, adhesives, sealing tapes, or cure times
- Can be used across the COYOTE Fiber Optic Closure product line including the COYOTE LCC, In-Line RUNT, ONE, 6.5" and 9.5" Domes, Terminals, Terminal Domes, and GLC
- Designed and tested in accordance to Telcordia® GR-771-CORE, Buried, Underground; field proven since 2005
- COYOTE Silicone Grommet Kits include: (1) Grommet, (1) Cable Measure Tape, (1) Silicone Lubricant Pack, and Plugs (where applicable)

# COYOTE® SILICONE GROMMET KITS



For Cable Diameters  
0.40" – 0.60" (10.2 – 15.2 mm)  
**Catalog Number: 8003691**



For Cable Diameters  
0.60" – 0.85" (15.2 – 21.6 mm)  
**Catalog Number: 8003692**



For Cable Diameters  
0.85" – 1.00" (21.6 – 25.4 mm)  
**Not for use in the COYOTE ONE**  
**Catalog Number: 8003693**



For Cable Diameters  
1.00" – 1.25" (25.4 – 31.8 mm)  
**Not for use in the COYOTE ONE or COYOTE LCC**  
**Catalog Number: 8003694**




For Cable Diameters  
0.42" – 0.60" (10.7 – 15.2 mm)  
**Catalog Number: 8003663**



For Cable Diameters  
0.50" – 0.60" (12.7 – 15.2 mm),  
0.125" – 0.250" (3.2 – 6.4 mm),  
and Flat Drop Cable  
**Catalog Number: 8003990**



For Cable Diameters  
0.250" – 0.312" (6.4 – 7.9 mm)  
**Catalog Number: 8004065**




For Cable Diameters  
0.30" – 0.43" (7.6 – 10.9 mm)  
**Catalog Number: 8003664**



For Cable Diameters  
0.125" – 0.250" (3.2 – 6.4 mm)  
and Flat Drop Cable  
**Catalog Number: 8003665**




For Cable Diameters  
0.42" – 0.60" (10.7 – 15.2 mm),  
0.125" – 0.250" (3.2 – 6.4 mm),  
and Flat Drop Cable  
**Catalog Number: 8003676**



For Cable Diameters  
0.093" – 0.125" (2.4 – 3.2 mm)  
**Catalog Number: 8004094**




For Cable Diameters  
0.125" – 0.250" (3.2 – 6.4 mm)  
and Flat Drop Cable  
**Catalog Number: 8003677**



For RPX Cable ONLY  
**Catalog Number: 8004122**



For RPX Cable and Cable Diameters  
0.125" – 0.250" (3.2 – 6.4 mm) and Flat Drop Cable  
**For use in the COYOTE LCC for aerial applications only**  
**Catalog Number: 8004152**



For Bow-Tie Drop Cable ONLY  
**For use in the COYOTE In-Line RUNT and 6.5" Domes with a max. flash test pressure of 5 PSI**  
**Catalog Number: 8004102**

## COYOTE Silicone Grommet Kit Accessories

| Catalog Number | Description  |
|----------------|--|
| 8003853        | Silicone Lubricant Kit – Includes (6) 5 Gram Packets   |
| 8003734        | Silicone Lubricant Kit – Includes (50) 5 Gram Packets  |
| 80811037       | 4-Port Cable Retention Bobbin Kit  |
| 80811036       | 6-Port Drop Cable Retention Bobbin Kit   |
| 80812163       | 6-Port Drop Cable Retention Bobbin and Grommet Kit - Includes (1) 6-Hole Grommet 0.125" – 0.250" and Flat Drop Cables and (1) 6-Hole Drop Cable Retention Bobbin Kit |
| 80812928       | 6/8-Port Drop Cable Retention Bobbin Kit   |



## COYOTE® DTC4/6 MOUNTING BRACKET KITS



COYOTE DTC4/6 Aerial Mounting Bracket Kit for Strand Applications  
**Catalog Number: 8004111**



COYOTE DTC4/6 Aerial Mounting Bracket Kit for ADSS Applications  
**Catalog Number: 8004112**



COYOTE DTC4/6 Pole/Wall Mounting Bracket Kit  
**Catalog Number: 8004109**



COYOTE DTC4/6 Mounting Bracket Kit for FIBERLIGN® ADSS Cable Storage Bracket Applications  
**Catalog Number: 8004172**

## COYOTE® DTC8 MOUNTING BRACKET KITS



COYOTE DTC8 Aerial Mounting Bracket Kit for Strand Applications  
**Catalog Number: 8004111**



COYOTE DTC8 Aerial Mounting Bracket Kit for ADSS Applications  
**Catalog Number: 8004112**



COYOTE DTC8 Pole/Wall Mounting Bracket Kit  
**Catalog Number: 8004104**



COYOTE DTC8 Mounting Bracket Kit for FIBERLIGN® ADSS Cable Storage Bracket Applications  
**Catalog Number: 8004172**

## COYOTE® LCC MOUNTING BRACKET KITS




COYOTE LCC Aerial Mounting Bracket Kit for Strand Applications  
**Catalog Number: 8003832**



COYOTE LCC Aerial Mounting Bracket Kit for ADSS Applications  
**Catalog Number: 8003852**



COYOTE LCC Pole/Wall Mounting Bracket Kit  
**Catalog Number: 8003830**

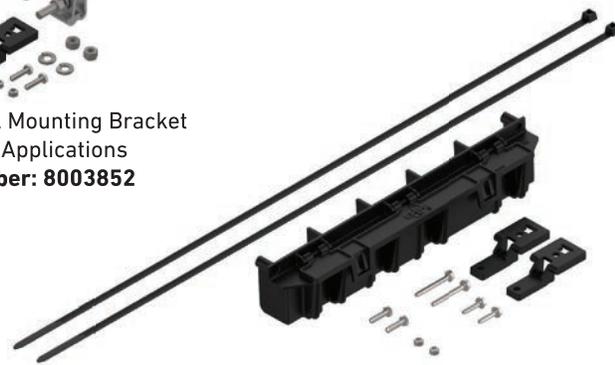

COYOTE Universal Mounting Bracket Kit for Handhole Applications  
**Catalog Number: 8003835**

## COYOTE® IN-LINE RUNT & TERMINAL CLOSURE (SINGLE CHAMBER) MOUNTING BRACKET KITS




COYOTE In-Line RUNT & Terminal Closure (Single Chamber) Aerial Mounting Bracket Kit for Strand Applications  
**Catalog Number: 8003797**



COYOTE In-Line RUNT & Terminal Closure (Single Chamber) Horizontal Mounting Bracket Kit for Strand Applications  
**Catalog Number: 8004179**



COYOTE In-Line RUNT & Terminal Closure (Single Chamber) Aerial Mounting Bracket Kit for ADSS Applications  
**Catalog Number: 8003864**

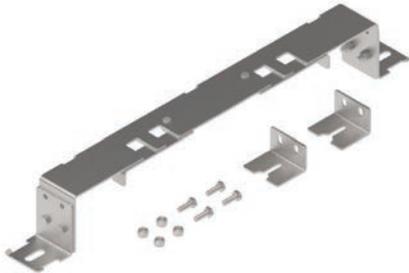

COYOTE In-Line RUNT & Terminal Closure Pole/Wall Mounting Bracket Kit  
**Catalog Number: 8003703**




COYOTE Universal Mounting Bracket Kit for Handhole Applications  
**Catalog Number: 8003835**




COYOTE In-Line RUNT & Terminal Closure Swing Arm for Handhole Applications  
**Catalog Number: 8003706**

## COYOTE® TERMINAL CLOSURE (DUAL CHAMBER) MOUNTING BRACKET KITS

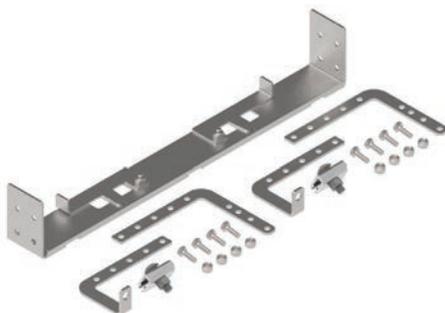

COYOTE Terminal Closure (Dual Chamber) Adjustable Offset Aerial Mounting Bracket Kit for Strand Applications  
**Catalog Number: 8003705**

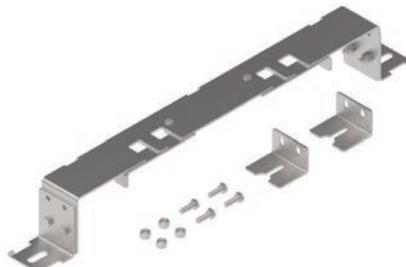

COYOTE In-Line RUNT & Terminal Closure Pole/Wall Mounting Bracket Kit  
**Catalog Number: 8003703**



COYOTE In-Line RUNT & Terminal Closure Swing Arm for Handhole Applications  
**Catalog Number: 8003706**



## COYOTE® ONE MOUNTING BRACKET KITS



COYOTE ONE Low Clearance Aerial Mounting Bracket Kit for Strand Applications  
**Catalog Number: EVOBKT-ALC**



COYOTE ONE Adjustable Offset Aerial Mounting Bracket Kit for Strand Applications  
**Catalog Number: EVOBKT-AE**



COYOTE ONE Low Clearance Aerial Mounting Bracket Kit for ADSS Applications  
**Catalog Number: 8004031**



COYOTE ONE Adjustable Offset Aerial Mounting Bracket Kit for ADSS Applications  
**Catalog Number: 8004032**



COYOTE ONE Pole/Wall Mounting Bracket Kit  
**Catalog Number: EVOBKT-PWM**



COYOTE Universal Mounting Bracket Kit for Handhole Applications  
**Catalog Number: 8003835**

## COYOTE® 6.5" DOME & TERMINAL DOME MOUNTING BRACKET KITS



COYOTE 6.5" Dome & Terminal Dome Adjustable Offset Aerial Mounting Bracket Kit for Strand Applications  
**Catalog Number: 8004035**




COYOTE 6.5" Dome & Terminal Dome Adjustable Offset Aerial Mounting Bracket Kit for ADSS Applications  
**Catalog Number: 8004036**



COYOTE 6.5" Dome & Terminal Dome Pole/Wall Mounting Bracket Kit  
**Catalog Number: 8003702**



COYOTE Universal Mounting Bracket Kit for Handhole Applications  
**Catalog Number: 8003835**

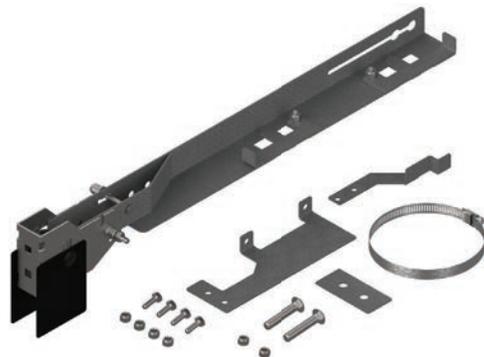

COYOTE 6.5" Dome & Terminal Dome Swing Arm for Handhole Applications  
**Catalog Number: 8003707**

## COYOTE® 9.5" DOME, HD DOME & TERMINAL DOME MOUNTING BRACKET KITS



COYOTE 9.5" Dome & Terminal Dome  
Adjustable Offset Aerial Mounting  
Bracket Kit for Strand Applications  
**Catalog Number: 8004037**



COYOTE 9.5" Dome & Terminal Dome  
Adjustable Offset Aerial Mounting  
Bracket Kit for ADSS Applications  
**Catalog Number: 8004038**



COYOTE 9.5" Dome & Terminal Dome  
Pole/Wall Mounting Bracket Kit  
**Catalog Number: 8003942**



COYOTE Dome Manhole  
Support Bracket Kit  
**Catalog Number: 8004003**







**GLOBAL HEADQUARTERS**  
660 BETA DRIVE  
CLEVELAND, OHIO 44143

+1 440 461 5200  
INFO@PLP.COM  
PLP.COM

© 2022 Preformed Line Products  
Printed in U.S.A.  
CO-CA-1004-16  
02.22.1M