


Vault Racking Detail Drawing

1. ALL HDPE PRIMARY DUCTS SHALL BE STUBBED NEXT TO THE VAULT WALL AS SHOWN AND SHALL NOT EXCEED 1 FOOT LENGTH IN THE VAULT.
2. CONSTRUCTION CONTRACTOR SHALL INSTALL A MINIMUM OF (4) 18 HOLE RACKS WITH AS MANY CABLE RACK SUPPORTS AS NECESSARY TO RACK THE REQUIRED LENGTH OF CABLE AS SPECIFIED BY THE GCI ENGINEER.

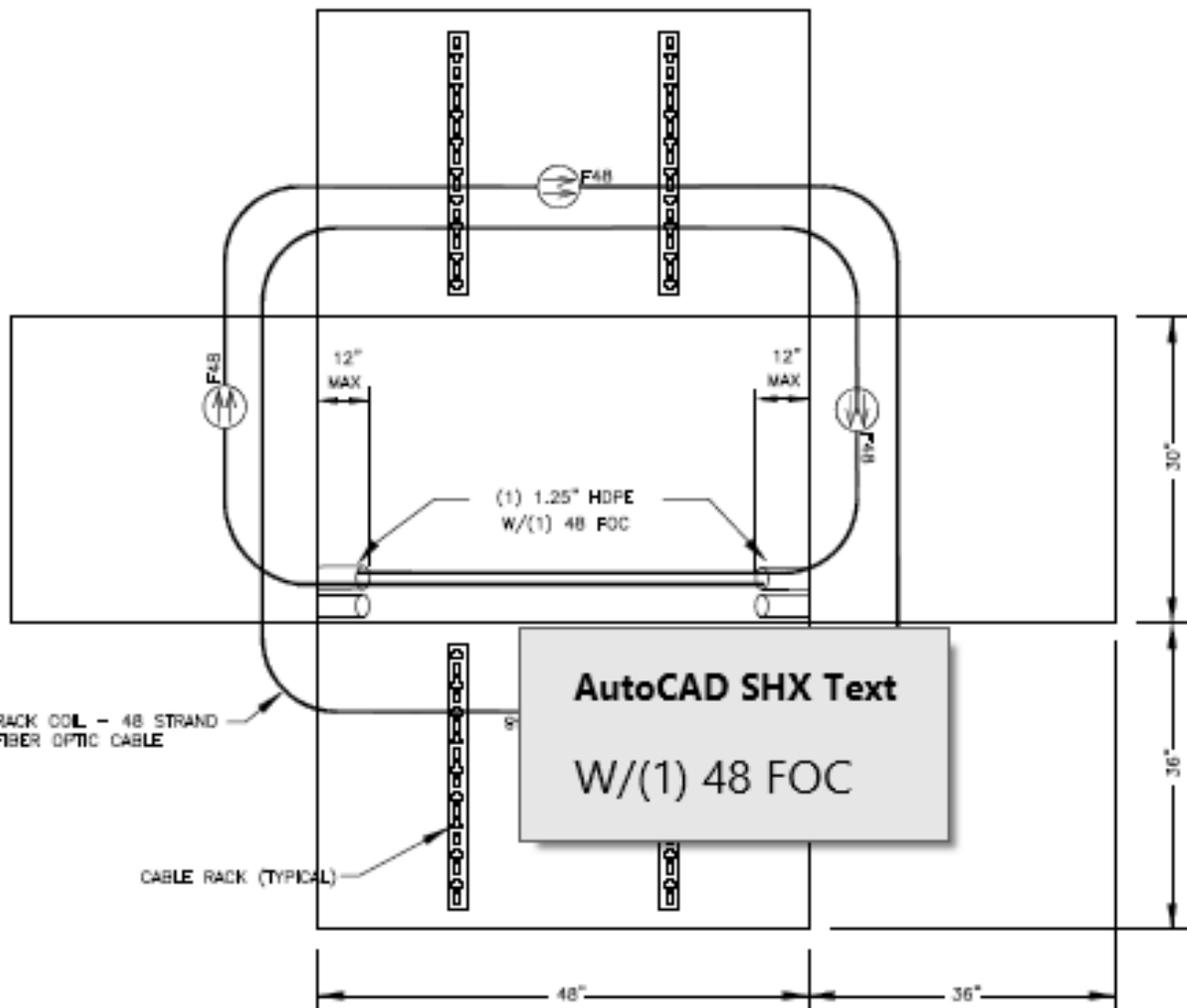

TYPICAL FOC48 VAULT RACKING DETAIL